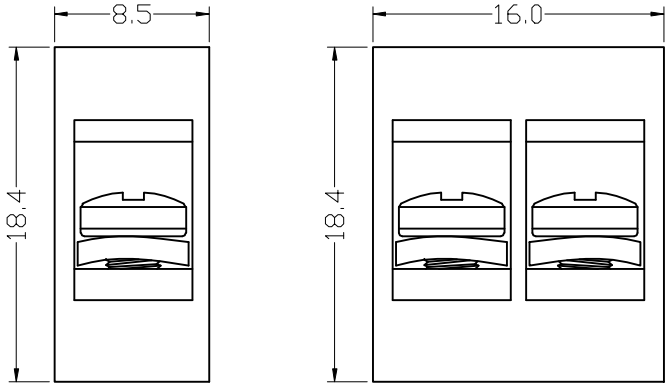

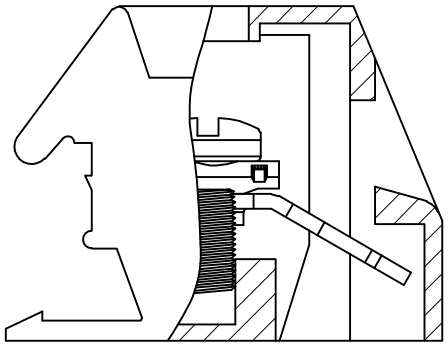

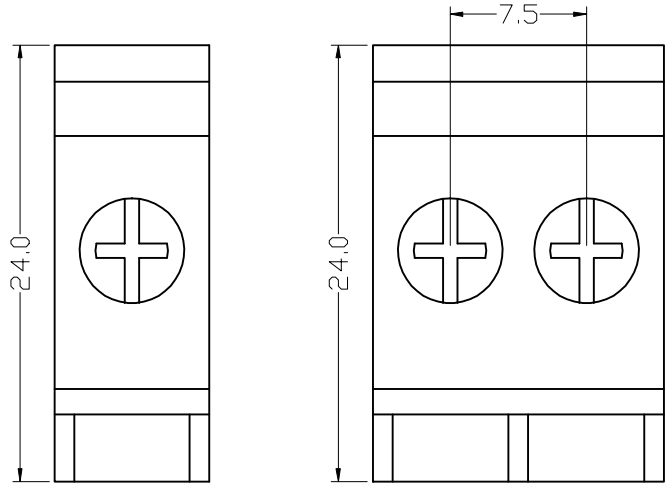

300V 10A 24-14AWG 2.5mm²
Poles: 1P,2P
Pitch: 7.5mm(.295")

Materials

Housing: PA66(UL 94V-0)
Clamp: Brass,Tin Plated
Screw: M3,Steel,Cr3+ Zinc Plated
Torque: 0.5N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.° ±2°
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/File name	文件编号/File No.	.x ±0.1	.x° ±1°
		XY262		.xx ±0.05	.xx° ±0.5°
			页序/Sheet	.xxx ±0.01	
		备注 /Remark		单位/Units:	mm