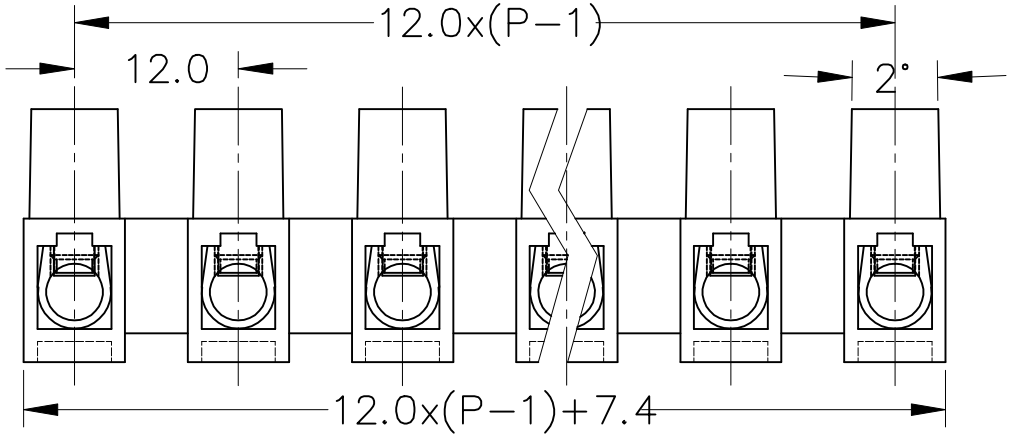

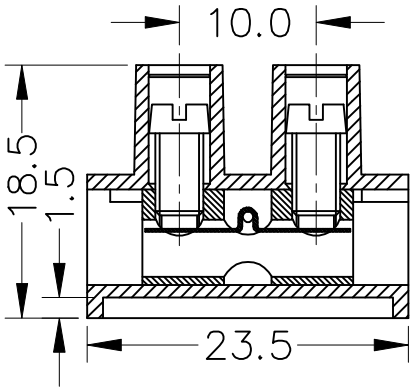

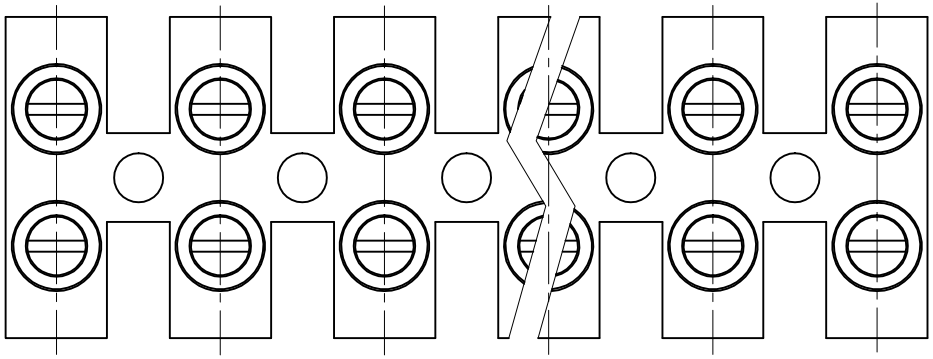

300V 30A 14-10AWG 6.0mm²

Poles: (2-12P)

Pitch: 12.0mm(.473")

Materials

Housing: PA66(UL 94V-0)

Current carrier: Brass,Nickel plated
Steel,Cr3+ Zinc plated

Screw: M3.5,Steel(A3),Zinc plated

Wire guard: Stainless Steel

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx°±0.5° .xxx ±0.01
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title: XY802W	文件编号/File No.	
			頁序/Sheet	
		备注/Remark		单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date