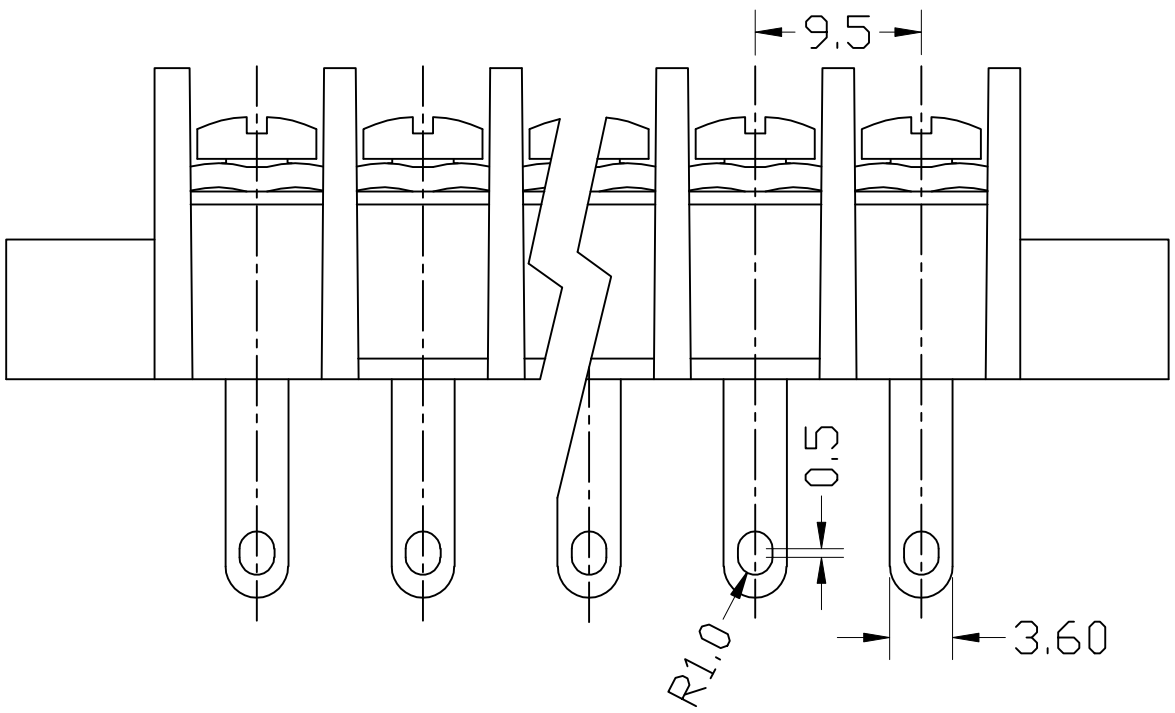

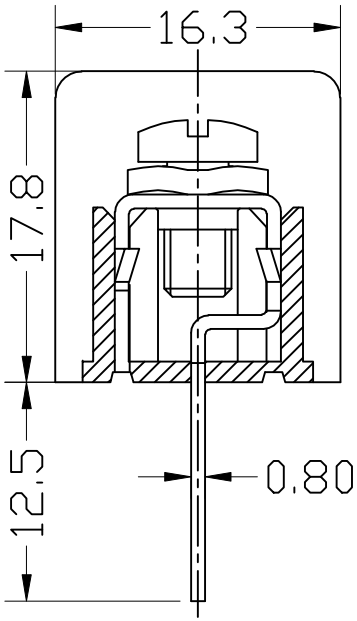

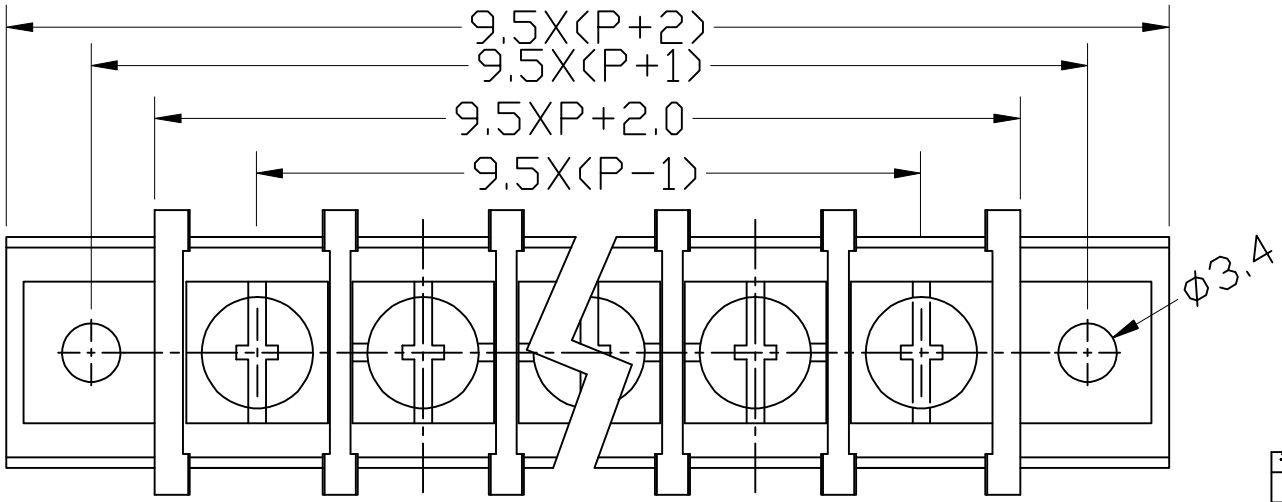

300V 25A 22-12AWG 4.0mm²
Poles: (2-24P)
Pitch: 9.5mm(.375")

Materials

Housing: PA66(UL 94V-0)
Solder Pin: Brass,Tin Plated
Screw: M3.5,Steel Nickel Plated
Torque: 1.0N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x ±0.2 x.° ±2° .x ±0.1 .x° ±1° .xx ±0.05 .xx° ±0.5° .xxx ±0.01
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title: XY845BW	文件编号/File No.	
			页序/Sheet	
		备注/Remark		单位/Units: MM

序号/No.	更改记录/Revision note	签名/Signature	日期/Date