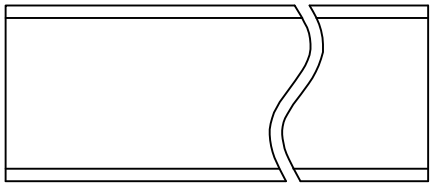

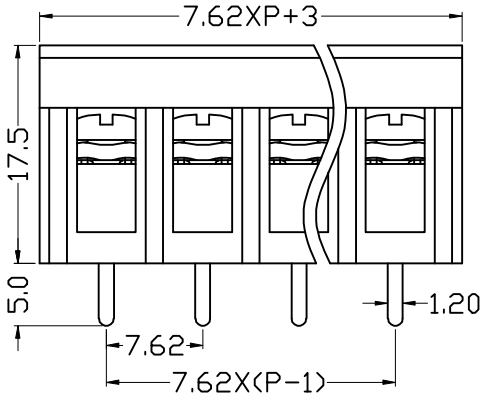

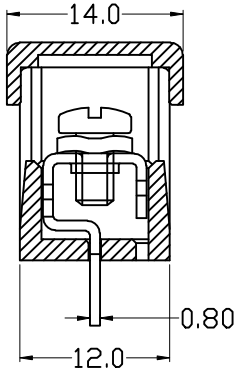

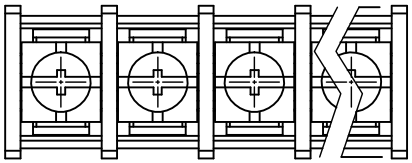

300V 15A 22–14AWG 2.5mm²

Poles: (2,3–24P)

Pitch: 7.62mm(.300")

Materials

Housing: PA66(UL 94V–0)

Solder Pin: Brass, Tin Plated

Screw: M3, Steel, Nickel Plated

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X ±0.2 X° ±2°
				.X ±0.1 .X° ±1°
				.XX ±0.05 .XX° ±0.5°
				.XXX ±0.01
新莱亚电子 XINYLAIA ELECTRONIC CO.,LTD		图名/Title: XY828AK	文件编号/File No.	
			页序/Sheet	
		备注/Remark		单位/Units: mm

序号/Revis.	更改记录/Revision note	签名/Signature	日期/Date