



序号/rev. No.	名称/Title	文件编号/Rev. No.
1	XY305V端子	QJ/XYT-2126101
2	XY166塑件	QJ/XYT-2122101
3	XY305簧片	QJ/XYT-2126102
4	XY166螺丝	QJ/XYT-2126103

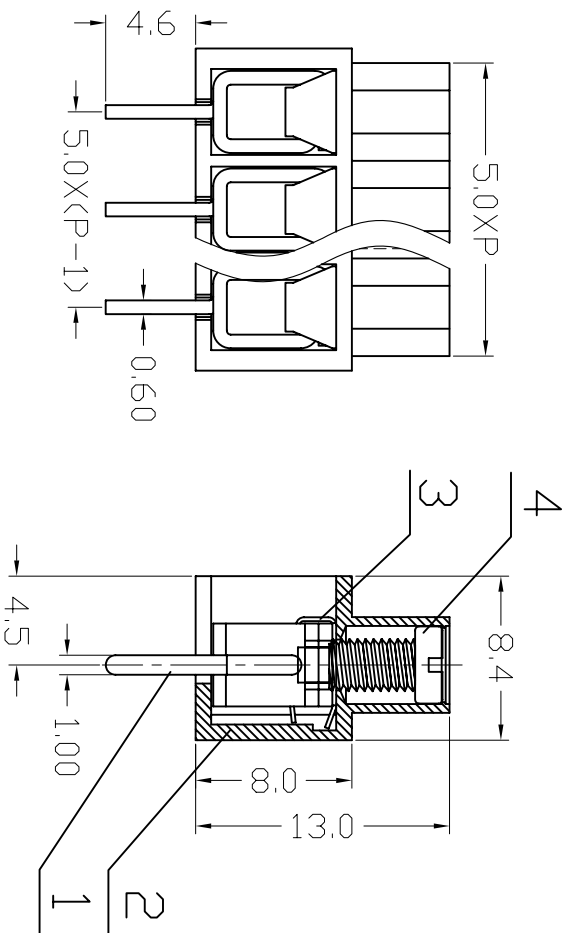

300V 15A 22-12AWG 2.5mm²
Poles: 2P, 3P-12P
Pitch: 5.0mm(.197")



Material
Housing: PA66(UL 94V-0)
Wire guard: Stainless Steel
Solder Pin: Brass, Tin Plated
Screw: M2.5 steel(A3), Zinc Plated
Torque: 0.4N.m

序号/rev. No. 更改记录/revision note 签名/signature 日期/date

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		未注公差/General Tolerance	
								X	±0.2
								X	±0.1
								.XX	±0.05
								.XXX	±0.01
								X'	±2'
								X''	±1''
								.XXX'	±0.5'
								单位/units: mm	

新莱亚电子
XINLAIYA ELECTRONIC CO., LTD

XY166 产品图

备注/Remark

文件编号/Rev. No.
QJ/XYT-2222100

页序/Sheet