



PIN OUT

DB25M	DB25M	DB9F	DB25F	DB25F	DB9F
1	1	3	2	2	3
2	2	2	3	3	2
3	3	7	4	4	7
4	4	8	5	5	8
5	5	6	6	6	6
6	6	1	7	7	5
7	7	4	8	8	1
8	8	—	20	20	1
9	9	—	22	22	4
11	11	—	—	—	9
12	12	—	—	—	—
14	14	—	—	—	—
15	15	—	—	—	—
16	16	—	—	—	—
17	17	—	—	—	—
20	20	—	—	—	—
24	24	—	—	—	—
SHIELD	SHIELD	SHIELD	SHIELD	SHIELD	SHIELD

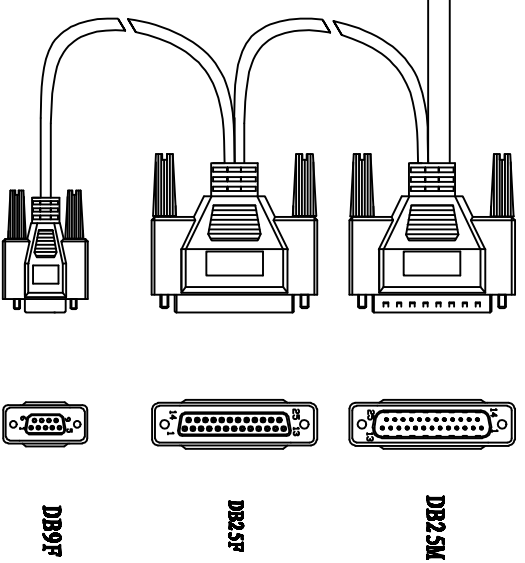

Note:
1: Using 18c+1/9C+1 wire

序号/Rev.No. 更改记录/revision note 签名/signature 日期/date

 新莱亚电子科技 XINLANVA ELECTRONIC CO., LTD		设计/Drawn by	绘图/Working by	审核/checked by	批准/Approved by	公差/公差 General Tolerance
图名/Title	文件编号/Part No.	图号/Sheet	图号/Sheet	图号/Sheet	图号/Sheet	公差/公差 General Tolerance
mm/32/32/32/32/32/32						mm/32/32/32/32/32/32
备注/Remark	XTG069					单位/unit: mm