






ACCESSORIES :

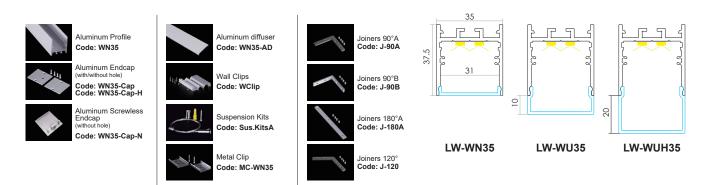

Optional Diffuser(PMMA)					
D005 type					
Dimensions(mm)	Max strip width	Opal	Milky	Frosted	Clear
35*37.5	31mm	√	√	√ √	√
Code		D005-O	D005-M	D005-F	D005-C
Light Transmittance		63%	78%	89%	95%
D005-U type					
Dimensions(mm)	Max strip width	Opal	Milky	Frosted	Clear
35*78	31mm	√	/	/	/
Code		D005-U-O	/	/	/
Light Transmittance		50%	/	/	/
D005-UH type					
Dimensions(mm)	Max strip width	Opal	Milky	Frosted	Clear
35*88	31mm	\checkmark	/	/	/
Code		D005-UH-O	/	/	/
Light Transmittance		40%	/	/	/


< 38.4W/m Aluminum Profile Weight:0.62kg/m Stocked length availability:2m,2.5m.

Stocked length availability:2m,2.5m. Customized length below 6m upon your request.


Tel: 0086 755 29362351 Direct: 0086 0 18680360436 Fax: 86 755 29014058 E-mail: info@ledwide.com www.ledwide.com Address:1-2/F, Building A2,Sinopol Ind.Park, First Industrial Zone, BaiHua communities, Guangming New District, Shenzhen, P.R. China Postcode: 518107




Installing Instructions Wall Mounted




1. Attach the wall side clip to surface



2. Attach the other side of clip to light fixture





3. Mount the light fixture onto the wall attachment




4. Secure the clips to ensure it stays in place


Applicable joiners

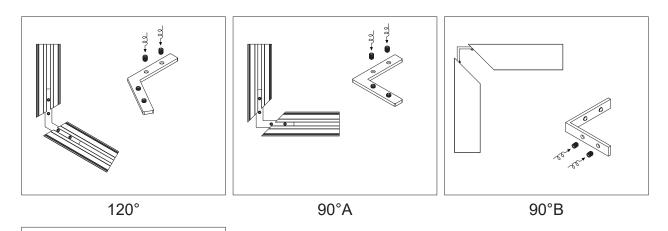





Other installation & Connection ways.

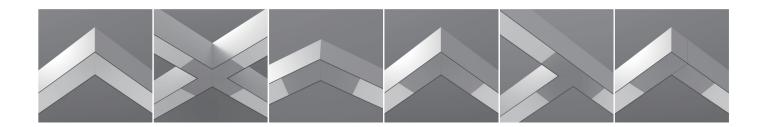






1. Apply LED strips into the profile

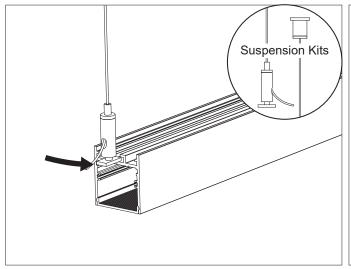

3.Install the Suspension Kits

4. Finally screw the end caps on



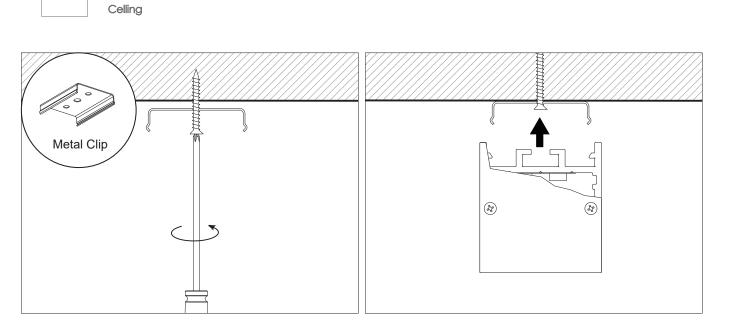

Installing Instructions

