LEDWIDE LIGHTING CO.,LTD

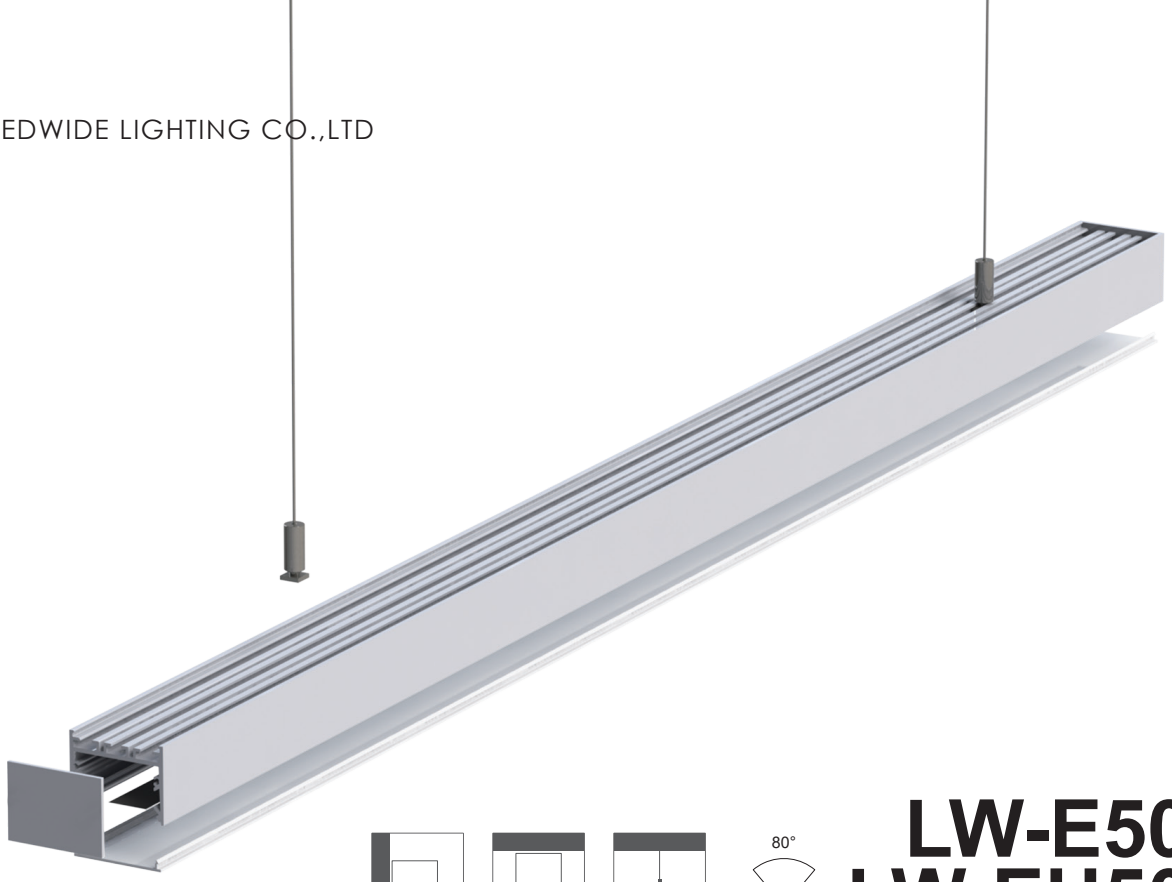

Wall Mounted

Celling

Suspended

LW-E50 HOT
LW-EU50

ACCESSORIES :


Aluminum Profile
Code: E50

Aluminum Endcap
(without hole)
Code: E50-Cap

Aluminum Screwless Endcap
(without hole)
Code: E50-Cap-N

Aluminum diffuser
Code: E50-AD


Wall Clips
Code: WClip

Suspension Kits
Code: Sus.KitsA

Metal Clip
Code: MC-E50

Joiners 90°A
Code: J-90A

Joiners 90°B
Code: J-90B

Joiners 180°A
Code: J-180A

Joiners 180°B
Code: J-180B

Joiners 120°
Code: J-120



LW-E50



LW-EU50

Optional Diffuser(PMMA)

D050 type					
Dimensions(mm)	Max strip width	Opal	Milky	Frosted	Clear
50*37.5	46mm	√	√	/	/
Code		D050-O	D050-M	/	/
Light Transmittance		67%	80%	/	/

D050U type					
Dimensions(mm)	Max strip width	Opal	Milky	Frosted	Clear
50*47.5	46mm	√	√	/	/
Code		EU50U-O	EU50U-M	/	/
Light Transmittance		55%	64%	/	/

<=57.6W/m

Aluminum Profile Weight:0.9kg/m

Stocked length availability:2m,2.5m.
Customized length below 6m upon your request.

Tel: 0086 755 29362351 Direct: 0086 0 18680360436 Fax: 86 755 29014058 E-mail: info@ledwide.com www.ledwide.com
Address:1-2/F, Building A2,Sinopol Ind.Park, First Industrial Zone, BaiHua communities, Guangming New District, Shenzhen, P.R. China Postcode: 518107

Installing Instructions

Wall Mounted



1. Attach the wall side clip to surface



2. Attach the other side of clip to light fixture



3. Mount the light fixture onto the wall attachment



4. Secure the clips to ensure it stays in place

Applicable joiners

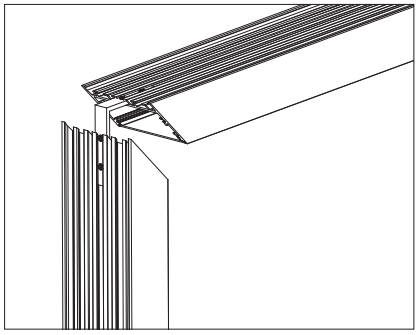

90°B

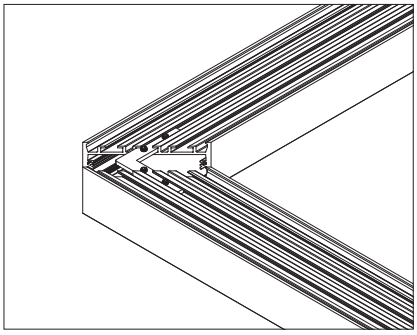

90°A

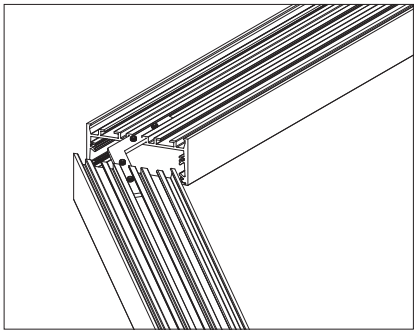

120°

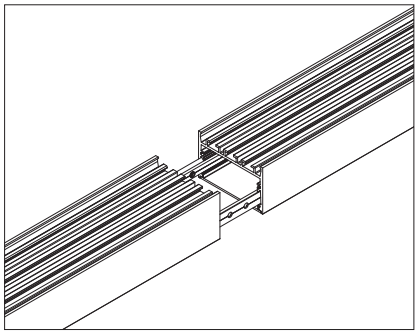

180°B

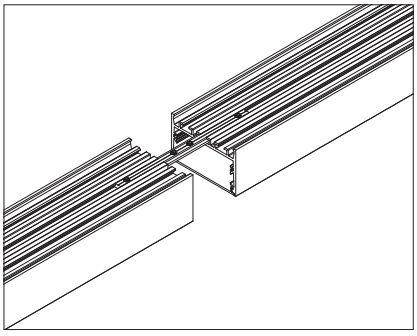

180°A

Other installation & Connection ways.

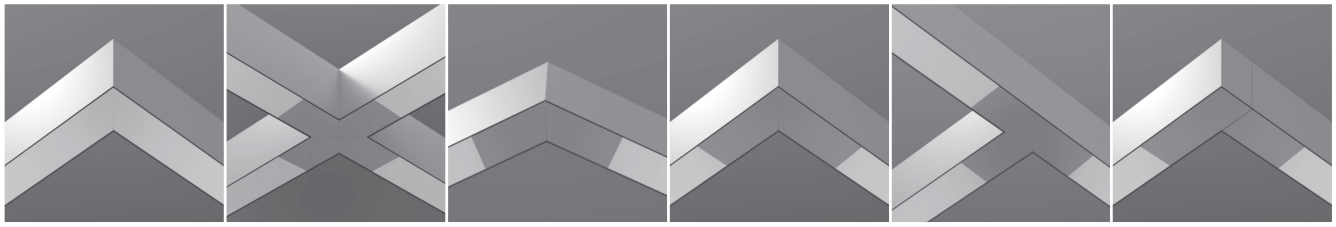

Installing Instructions

Suspended

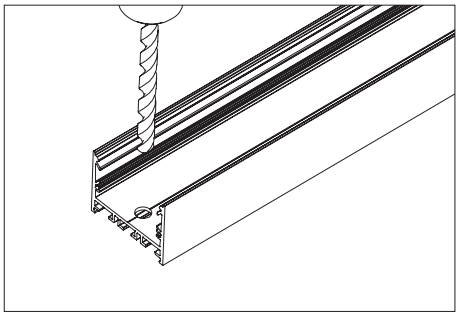

1.Drill a hole on the aluminium

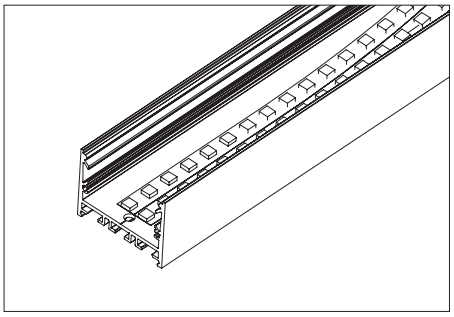

2.Fit the led strip on the aluminium

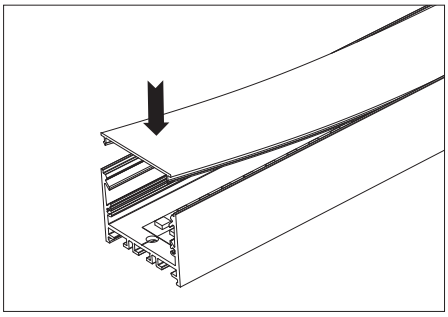

3.Click/snap on the diffuser from end to end

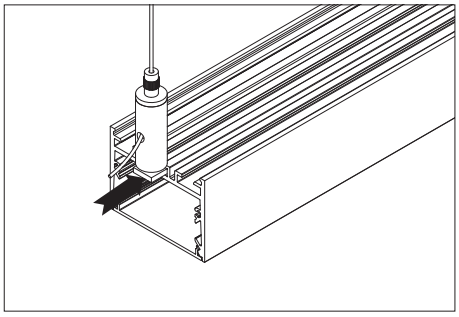

4.Install the suspension kits

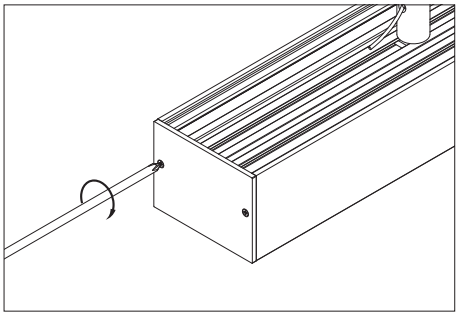

5.screws the end caps

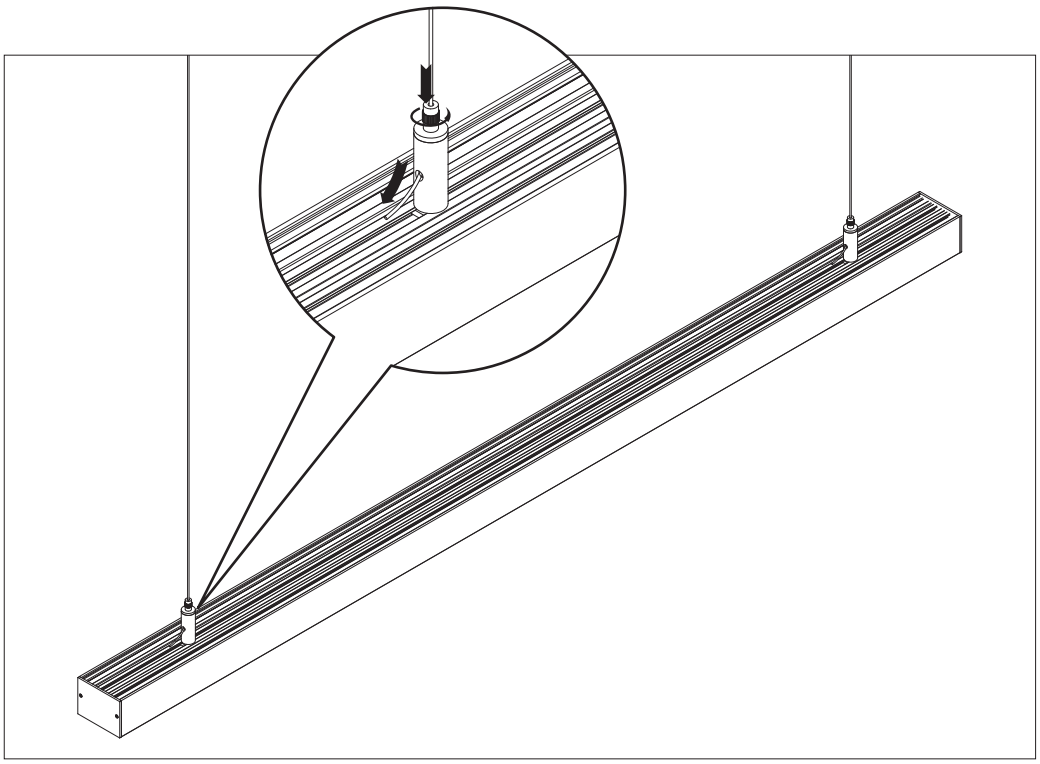

6.Fix the top joiner to the ceiling.Adjust the cable length to suit.

Installing Instructions
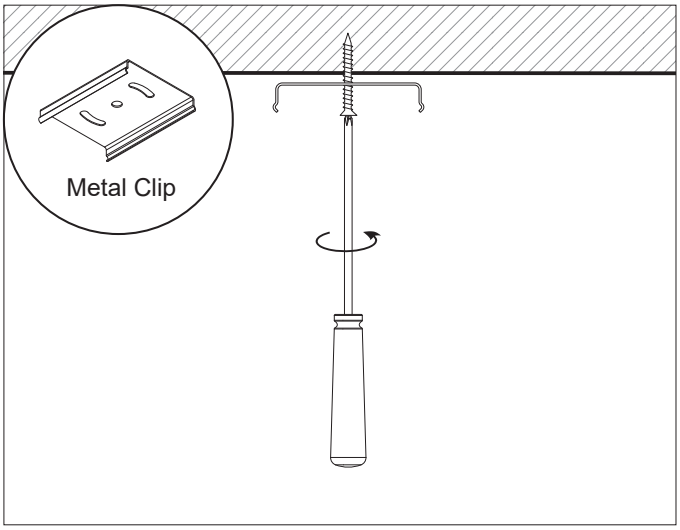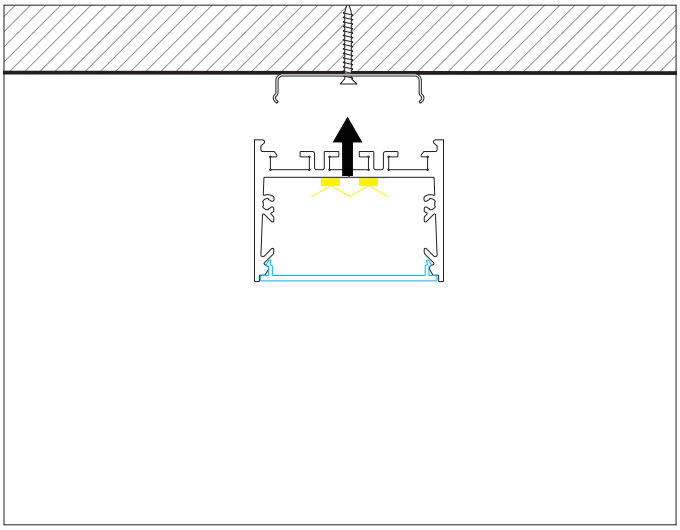
Celling