











□ LW-P46


ACCESSORIES:












Optional Diffuser(PMMA)					
/					
Dimensions(mm)	Max strip width	Opal	Milky	Frosted	Clear
46*68.5	25.4mm	/	√	/	/
Code		/	D-P46-M	/	/
Light Transmittance		/	79%	1	1

<38.4W/m Aluminum Profile Weight: 1.6kg/m


Stocked length availability:2m,2.5m. Customized length below 6m upon your request.




Wall Mounted




1. Attach the wall side clip to surface



2. Attach the other side of clip to light fixture




3. Mount the light fixture onto the wall attachment




4. Secure the clips to ensure it stays in place


Applicable joiners








90°A





Other installation & Connection ways.

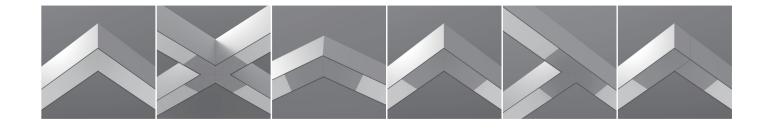




Suspended






1.Drill a hole on the top aluminium


2.Drill a hole on the basic aluminium






3.Stick the led strip

4.Put the led driver into place

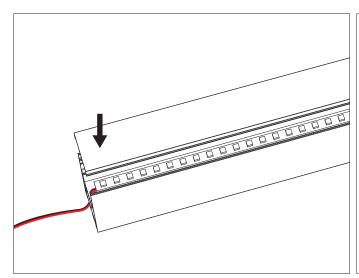




5.Click/snap on the diffuser from end to end


6.Install the Suspension Kits




Suspended

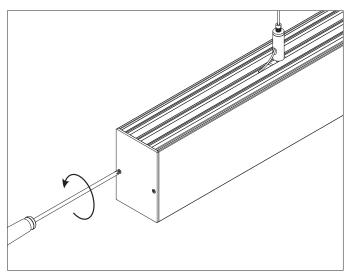

7.Screws the end caps

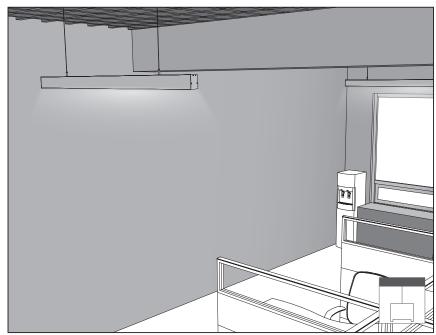





Celling

