

Product Specification

5050 LED strip light

(LR series)

LWF-1112/2400WW60

| Made by | Checked by | Date | Version |
|------------|------------|------------|---------|
| Biao Zhang | Rongwei Li | 2014.08.15 | A0 |



LEDWIDE LIGHTING CO.,LTD

Phone: +86 (755) 29362351

Fax: 86 755 29014058

Address : 1-2/F, Building A2,Sinopol Ind.Park, First Industrial Zone,
BaiHua communities, Guangming office,
Guangming New District, Shenzhen, P.R. China



LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

5050 LR series (60leds/m) feature and photo

Feature:

DC12/24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 5050 SMD led

Led lighting angle: 120°

Led quantity: 72leds/m


Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller

Water-proof rating: IP20

Photo:

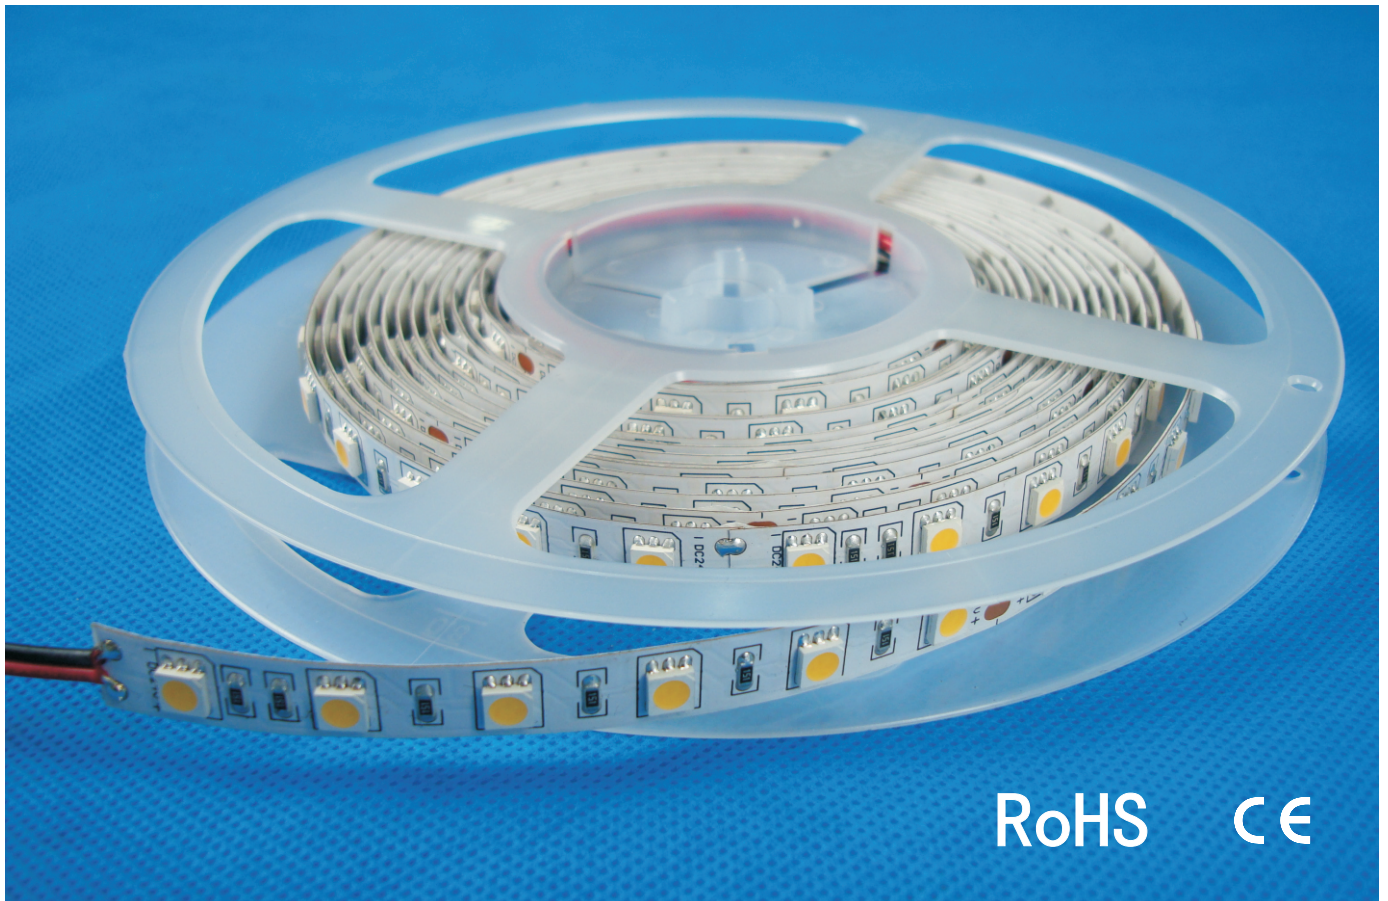



LED WIDE


www.ledwide.com

深圳市里外光电科技有限公司


LEDWIDE LIGHTING CO.,LTD

5050 LR series (60leds/m) dimension chart

Front:

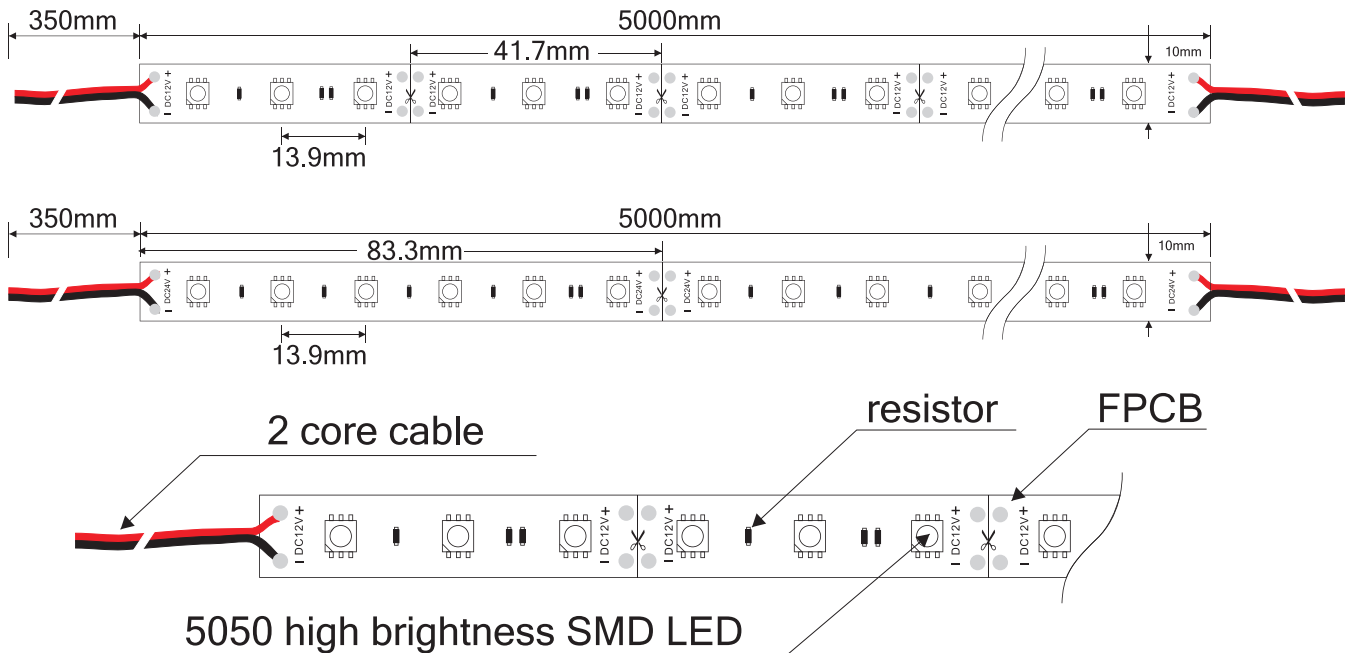

Lateral:



5050 LR series (60leds/m) photoelectric parameters

LR series led strip: 5050 SMD 72leds/m DC12/24V power:15.8W±10%/M IP rating:IP20

| Part-Number | Color | PCB width | Lumen (CRI>80) | Lumen (CRI>90) |
|------------------------|------------|-----------|----------------|----------------|
| LWF-1112/2400R/G/B/Y60 | R/G/B/Y | 10mm | ---- | ---- |
| LWF-1112/2400W60 | white | 10mm | 1380lm/m | 900lm/m |
| LWF-1112/2400WW60 | warm white | 10mm | 1132lm/m | 760lm/m |





LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

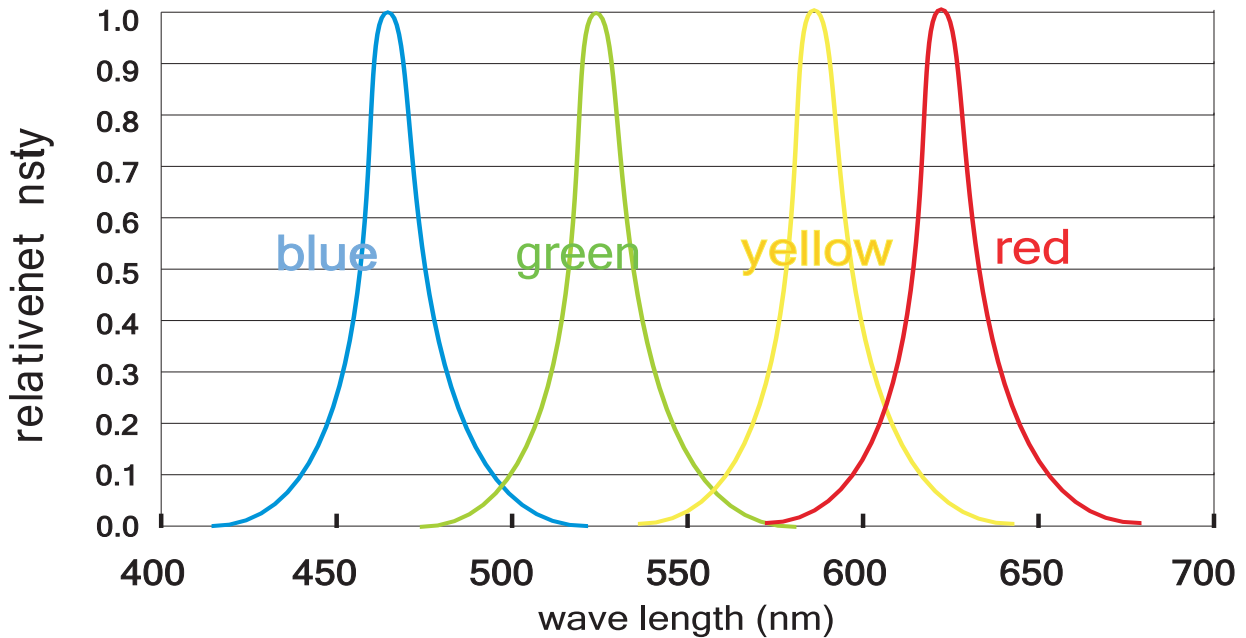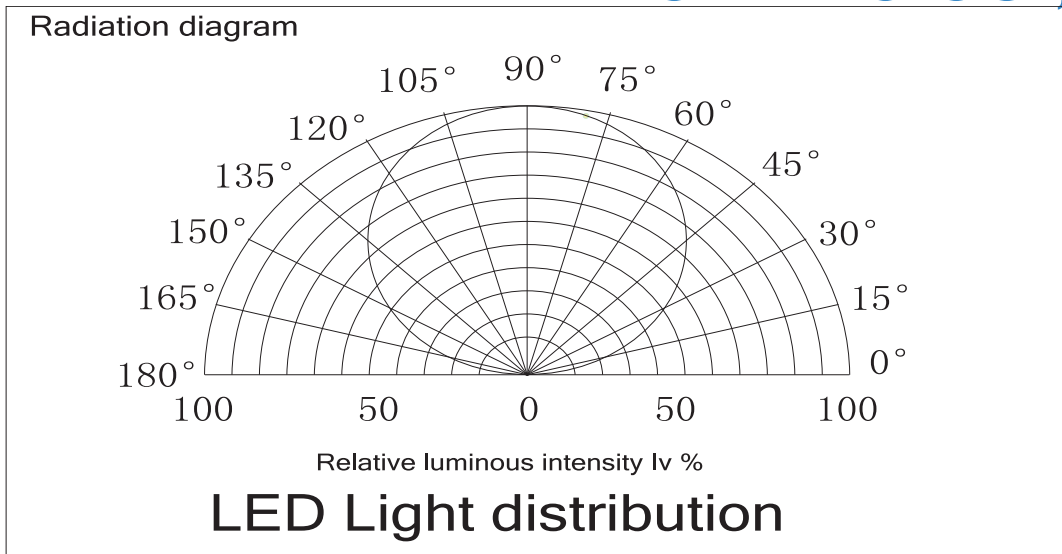

for: red, blue, green, yellow

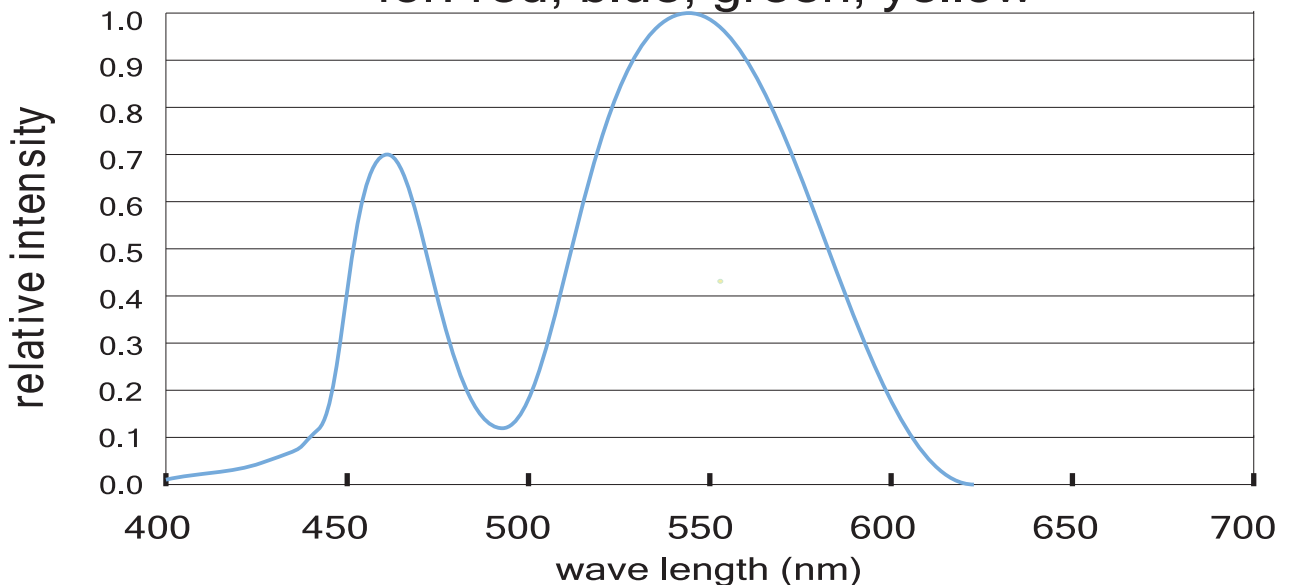

for: white LED





LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

5050 LR series (60leds/m) connection ways

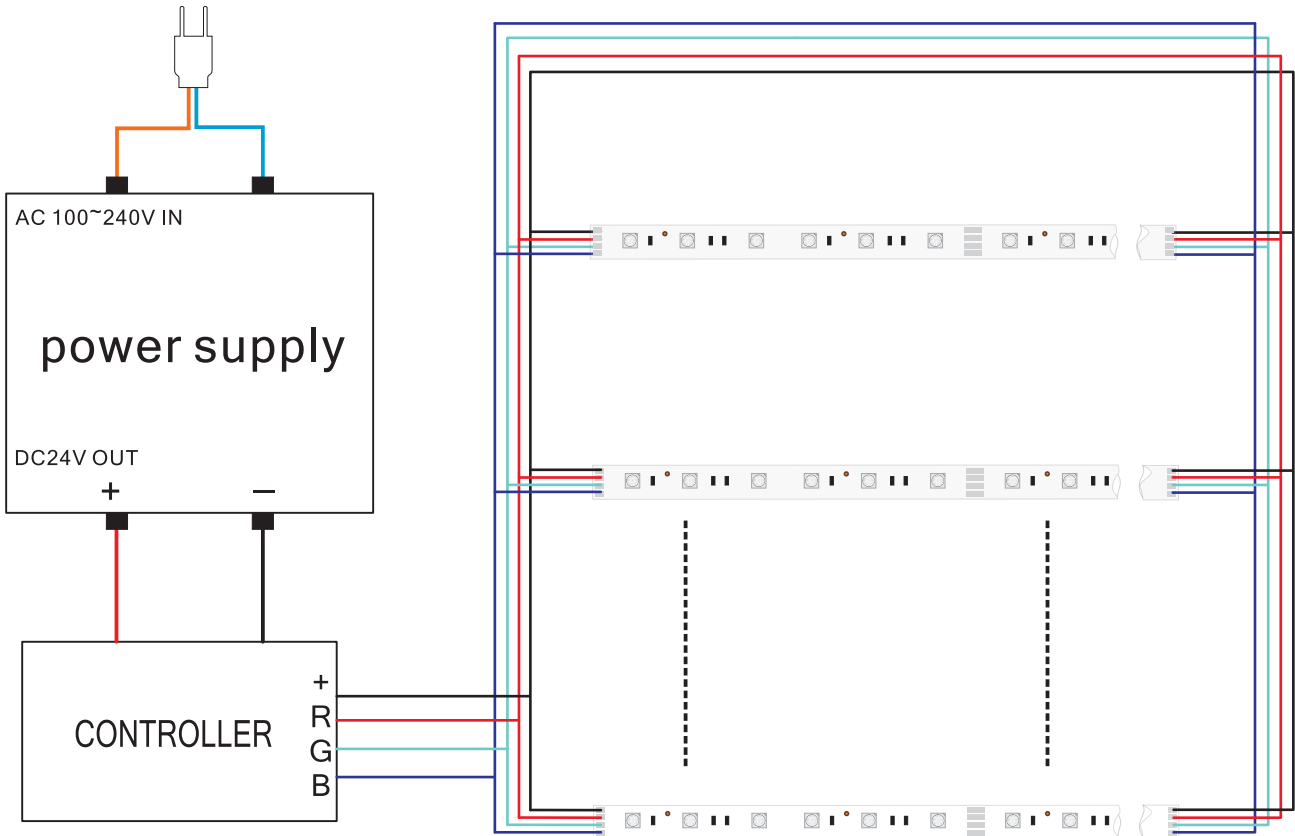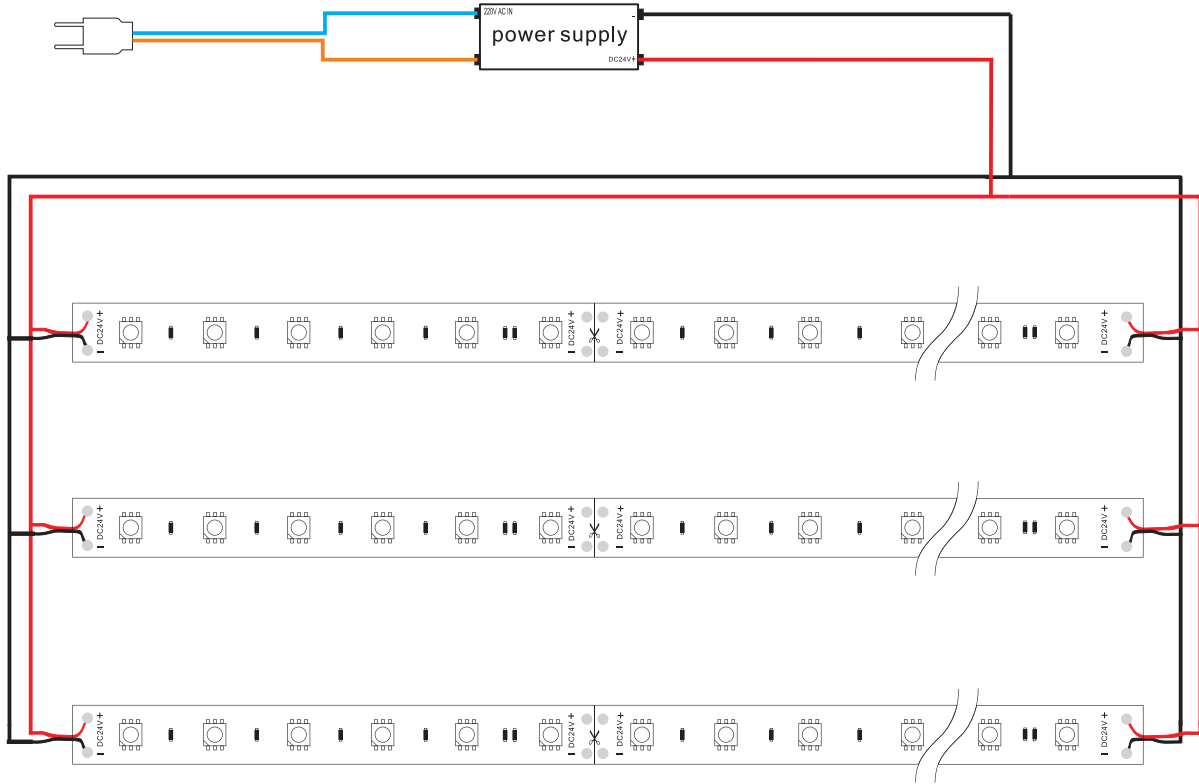



LEDWIDE

www.ledwide.com


深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

5050 LR series (60leds/m) packing



5meter/roll



1roll/bag



Carton360X240X240mm

25bags/carton

Operation temperature: -20~50°C

Storage temperature: -30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 25bags packed into one carton