

Product Specification

2835 LED strip light

(LR series)

LWF-1312/2400WW60

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.08.18	A0



LEDWIDE LIGHTING CO.,LTD

Phone: +86 (755) 29362351

Fax: 86 755 29014058

Address : 1-2/F, Building A2, Sinopol Ind.Park, First Industrial Zone,
BaiHua communities, Guangming office,
Guangming New District, Shenzhen, P.R. China



LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

2835 LR series (60leds/m) feature and photo

Feature:

DC12/24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 2835 SMD led

Led lighting angle: 120°

Led quantity: 60leds/m


Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller

Water-proof rating: IP20

Photo:

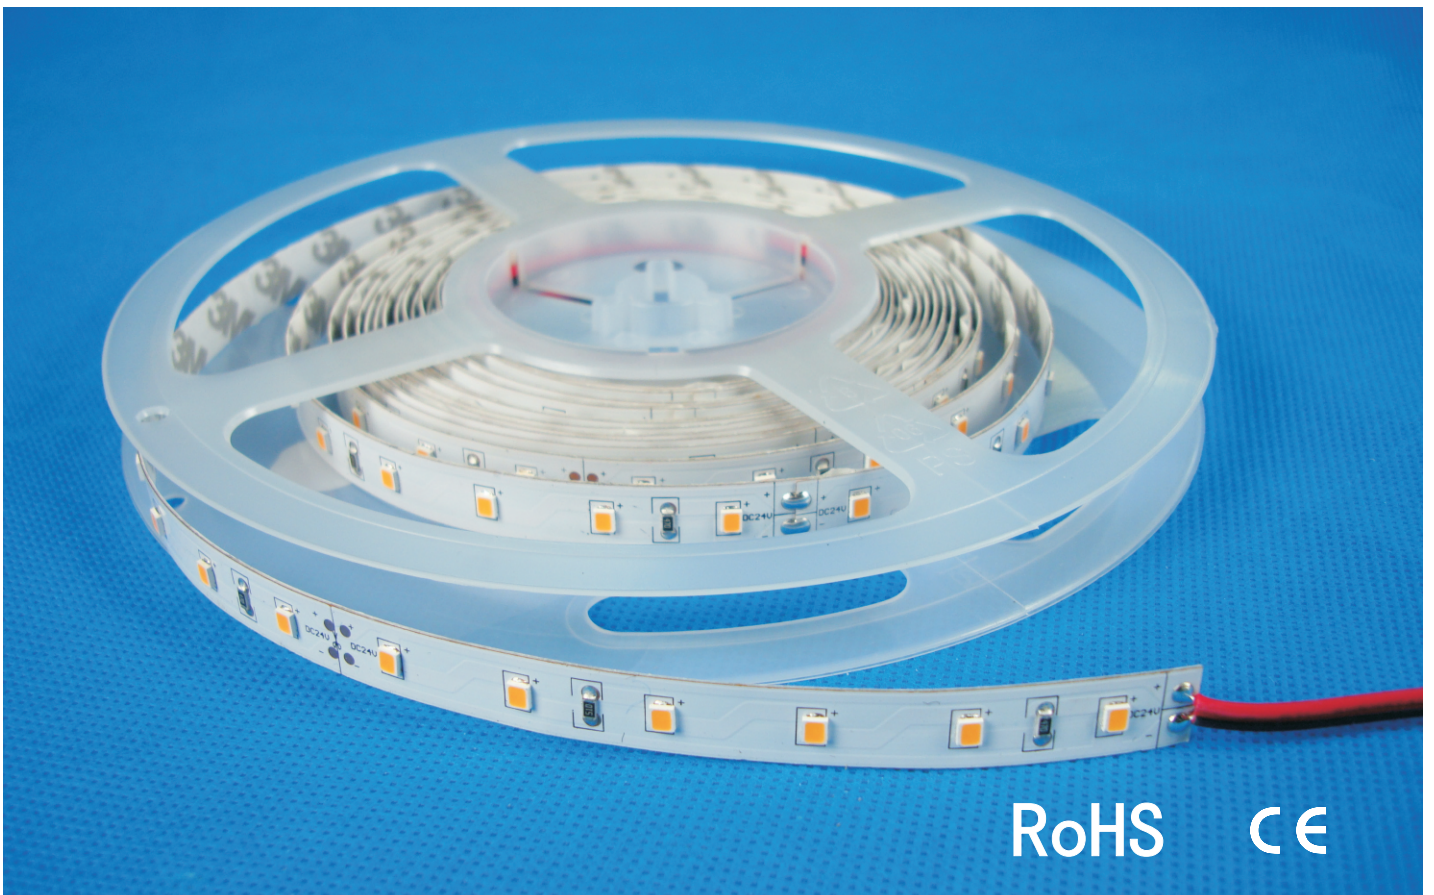



LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司


LEDWIDE LIGHTING CO.,LTD

2835 LR series (60leds/m) dimension chart

Front:

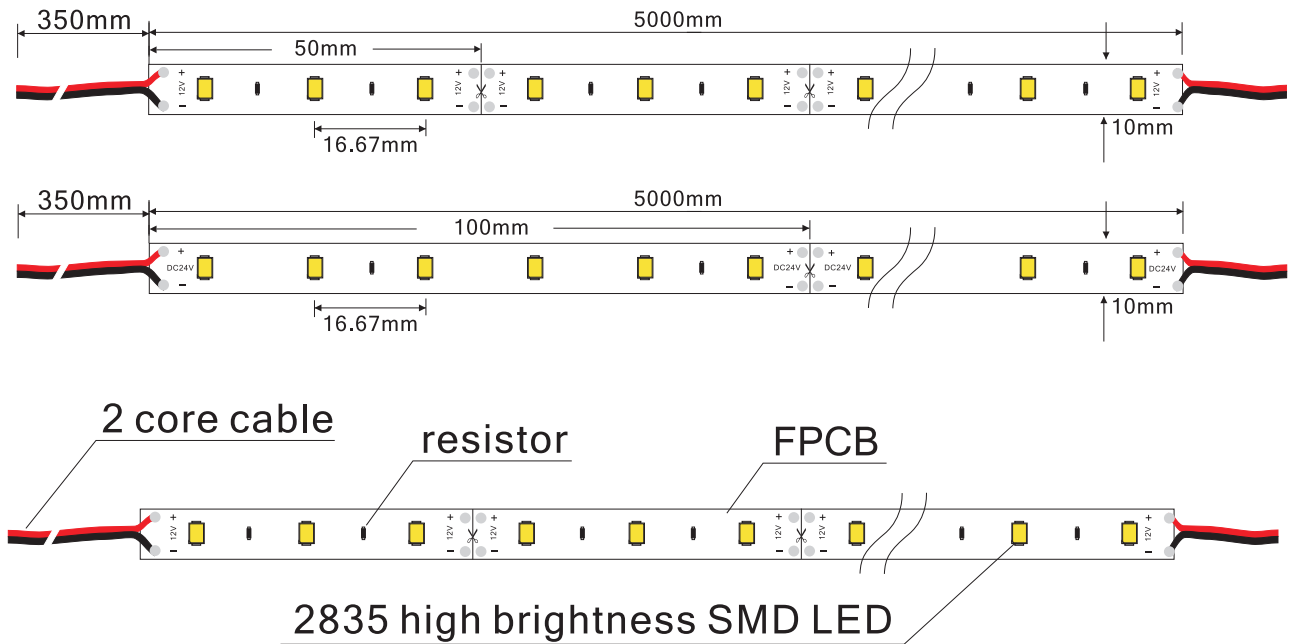

Lateral:



2835 LR series (60leds/m) photoelectric parameterst

LR series led strip: 2835 SMD 60leds/m DC12/24V power:13.2W±10%/M IP rating:IP20

Part-Number	Color	PCB width	Lumen
LWF-1312/2400W60	white	10mm	1290lm
LWF-1312/2400WW60	Warm White	10mm	1200lm





LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

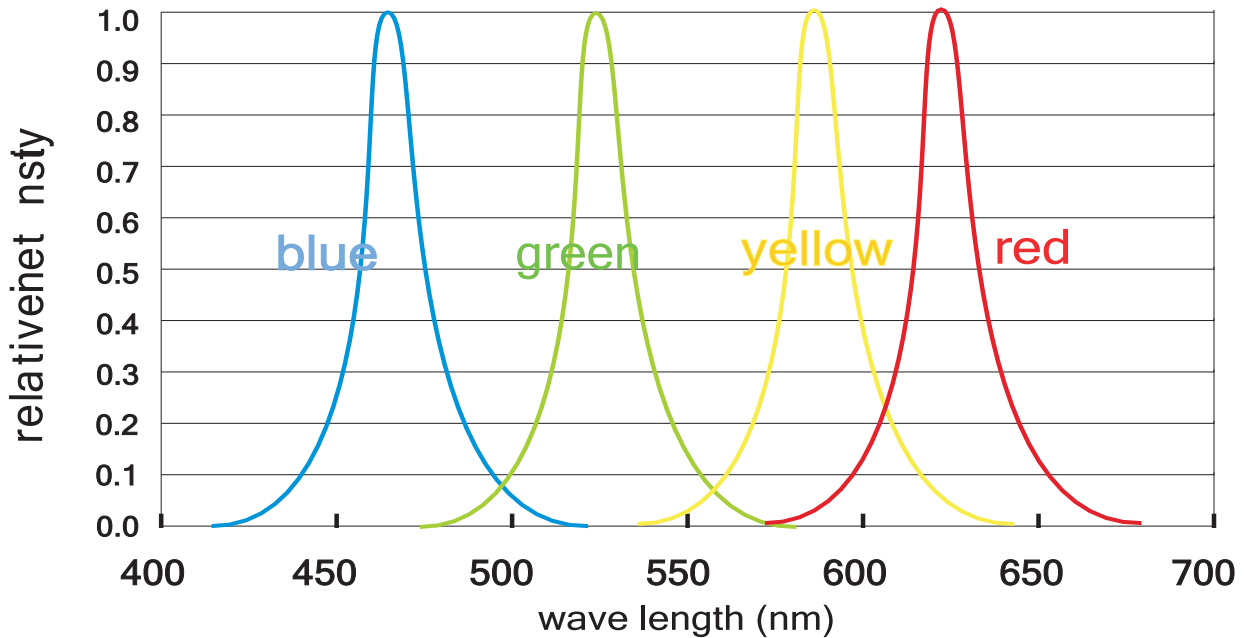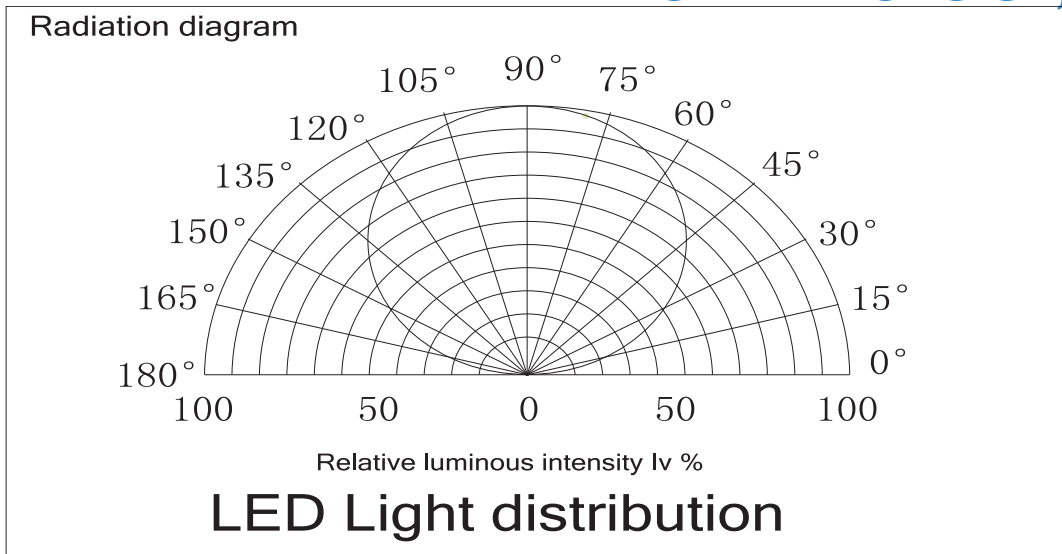

for: red, blue, green, yellow

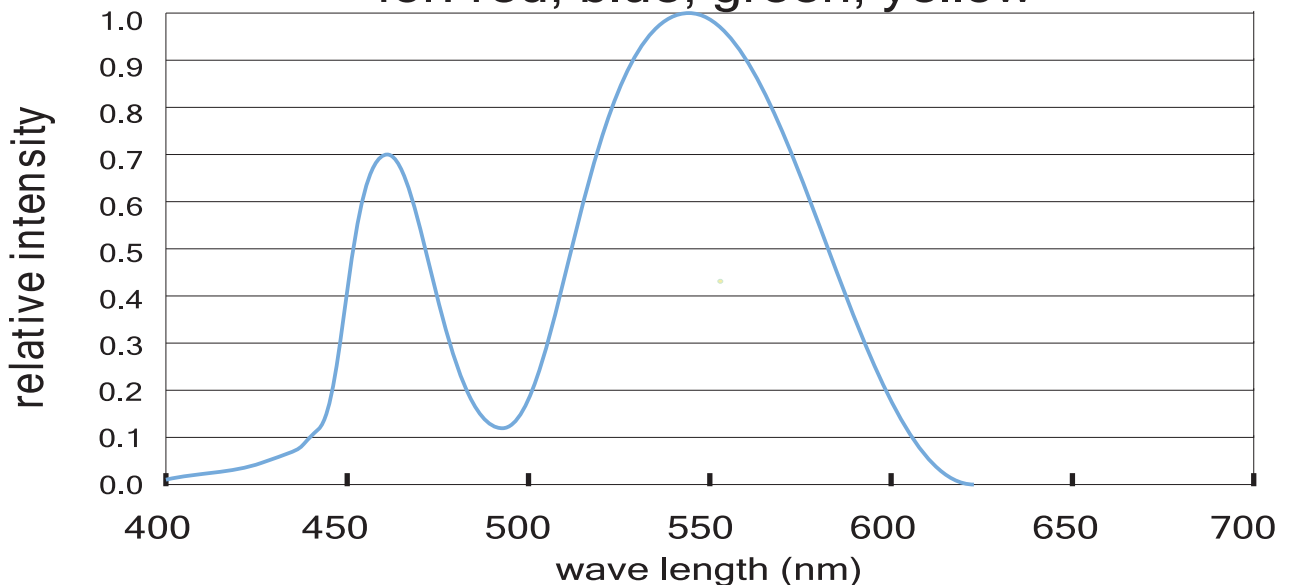

for: white LED




LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD


2835 LR series (60leds/m) connection ways

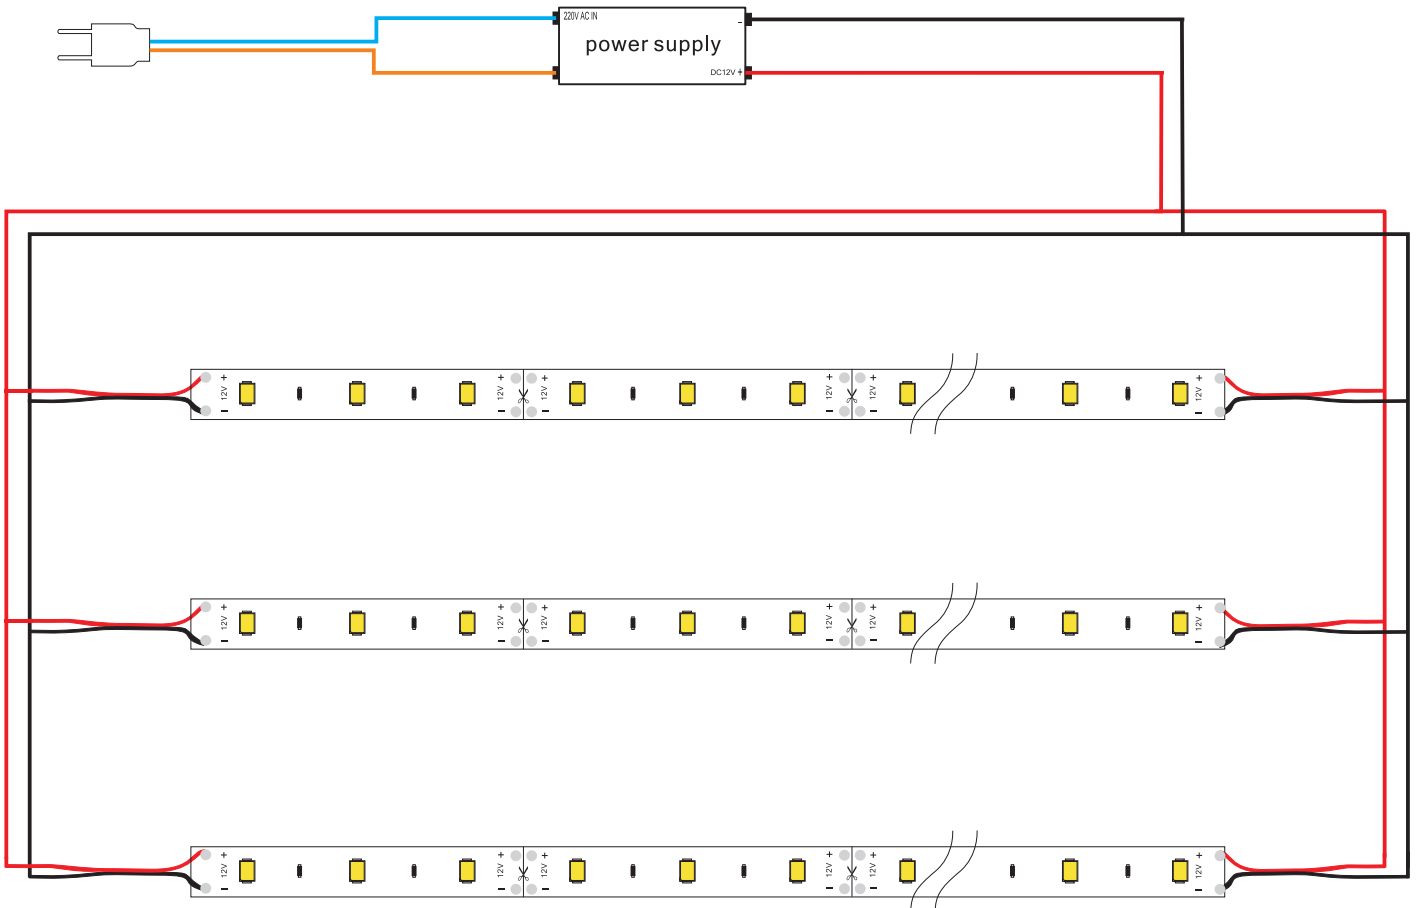

2835 LR series (60leds/m) packing



5meter/roll



1roll/bag



Carton360X240X240mm

25bags/carton

Operation temperature:-20~50°C

Storage temperature:-30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 25bags packed into one carton