

# Product Specification

2835 LED strip light

(LR series)

LWF-132400WW240

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.12.01	A0



**LEDWIDE LIGHTING CO.,LTD**

Phone: +86 (755) 29362351

Fax: 86 755 29014058

Address : 1-2/F, Building A2,Sinopol Ind.Park, First Industrial Zone,  
BaiHua communities, Guangming office,  
Guangming New District, Shenzhen, P.R. China



LEDWIDE

[www.ledwide.com](http://www.ledwide.com)

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

## 2835 LR series (240leds/m) feature and photo

### Feature:

DC24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 2835 SMD led

Led lighting angle: 120°

Led quantity: 240leds/m


Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller

Water-proof rating: IP20

### Photo:

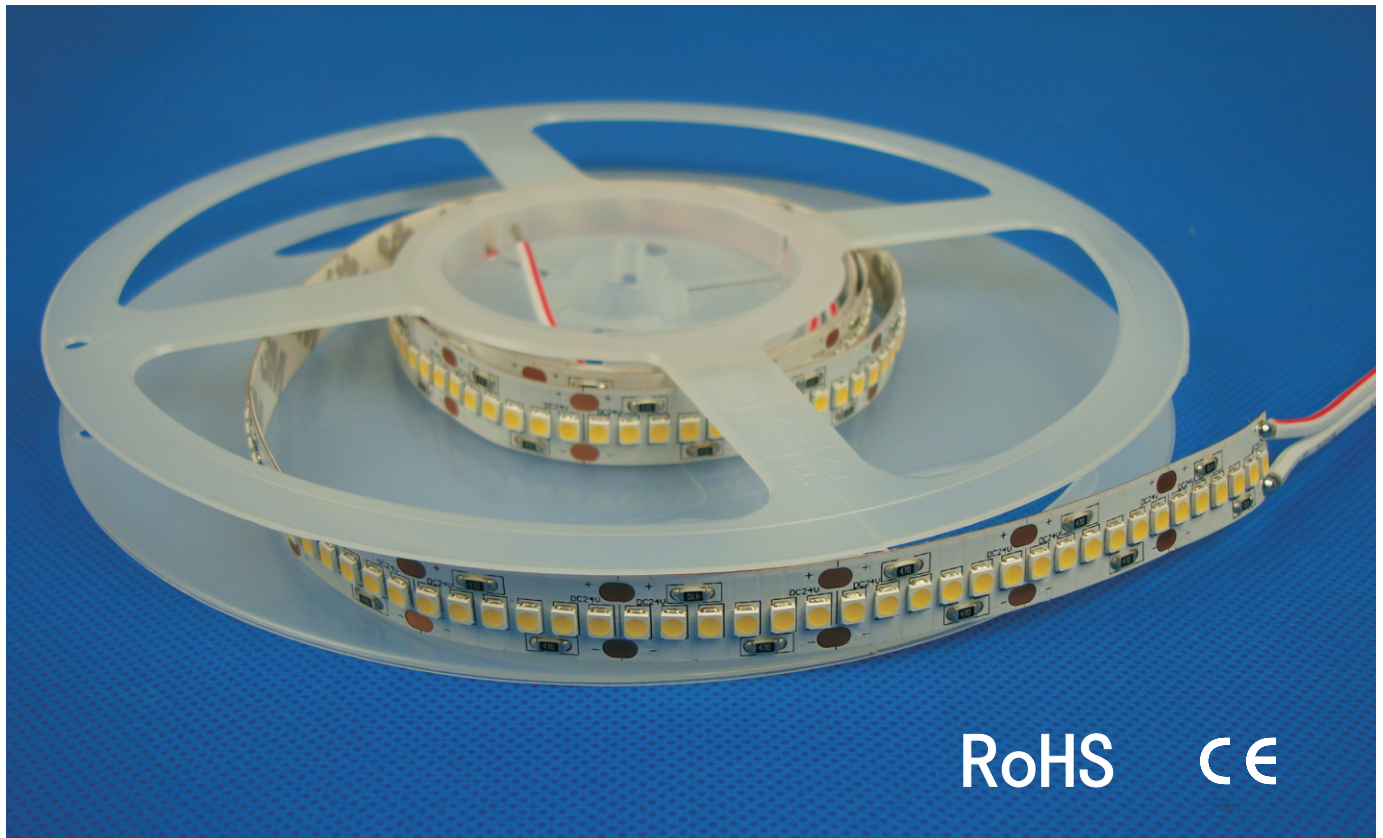



LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

## 2835 LR series (240leds/m) dimension chart

Front:

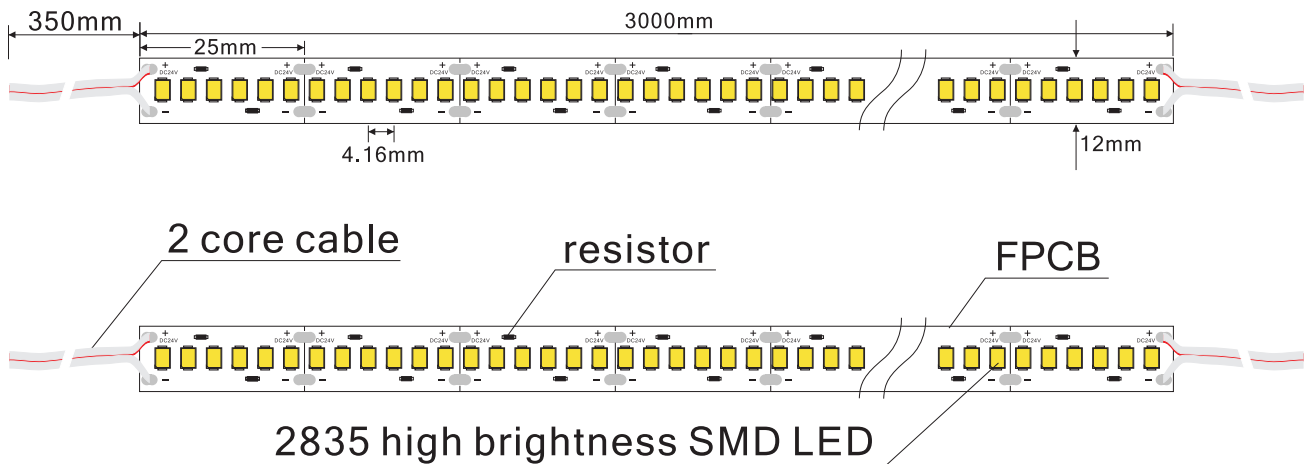

Lateral:



## 2835 LR series (240leds/m) photoelectric parameterst

LR series led strip: 2835 SMD 240leds/m DC24V power:48W±10%/M IP rating:IP20

Part-Number	Color	PCB width	Lumen
LWF-132400W240	white	12mm	4970lm
LWF-132400WW240	Warm White	12mm	4620lm





LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

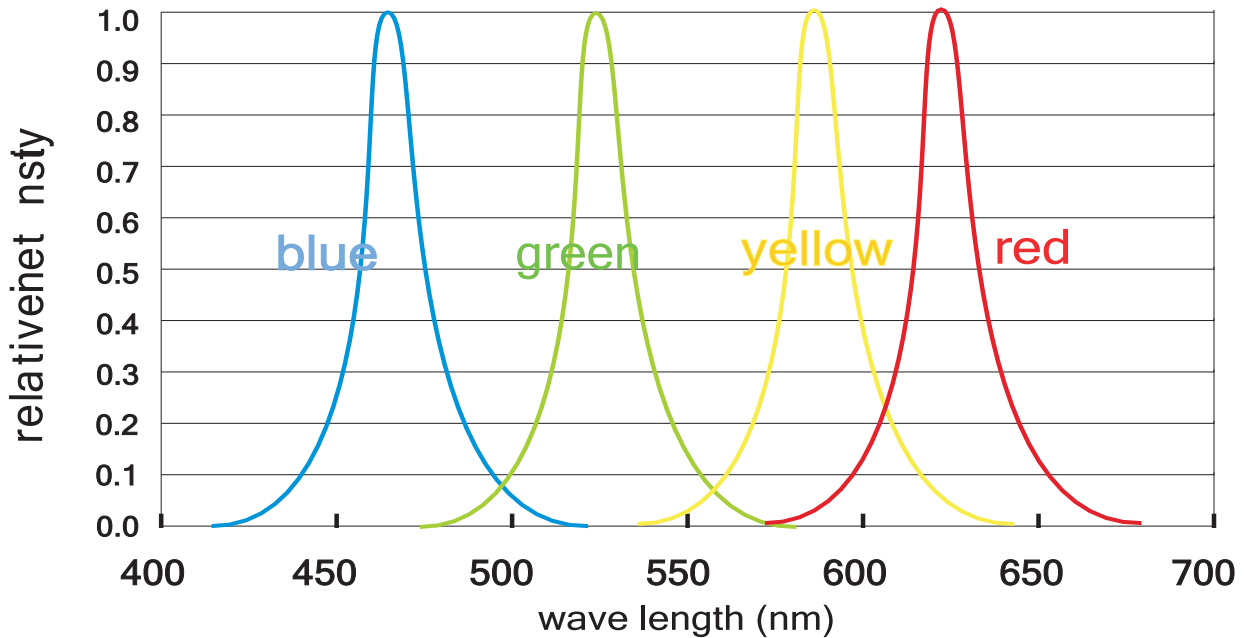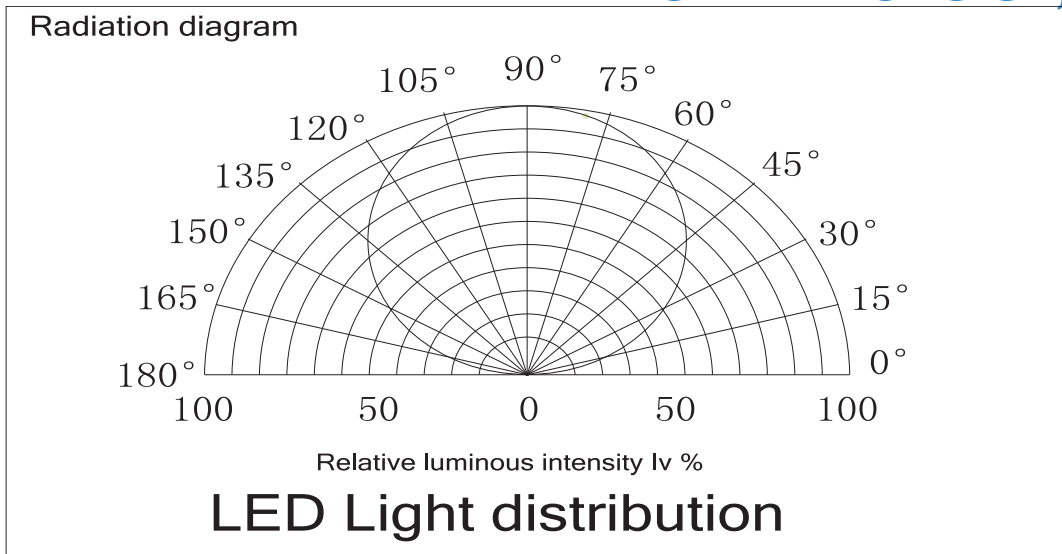

for: red, blue, green, yellow

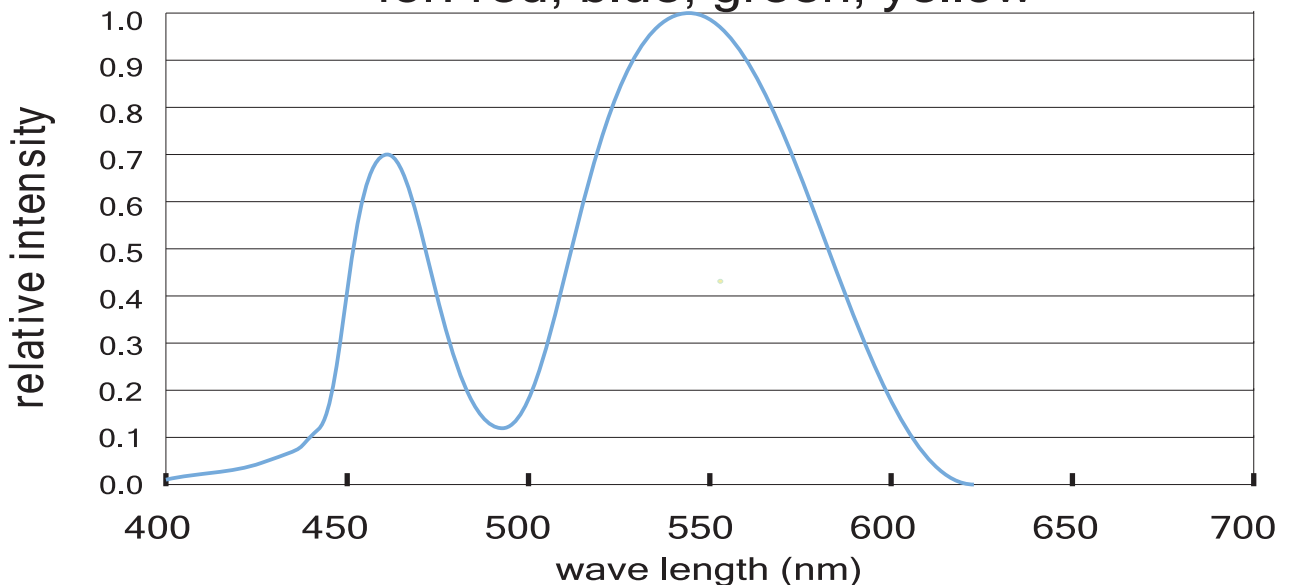

for: white LED




LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

### 2835 LR series (240leds/m) connection ways

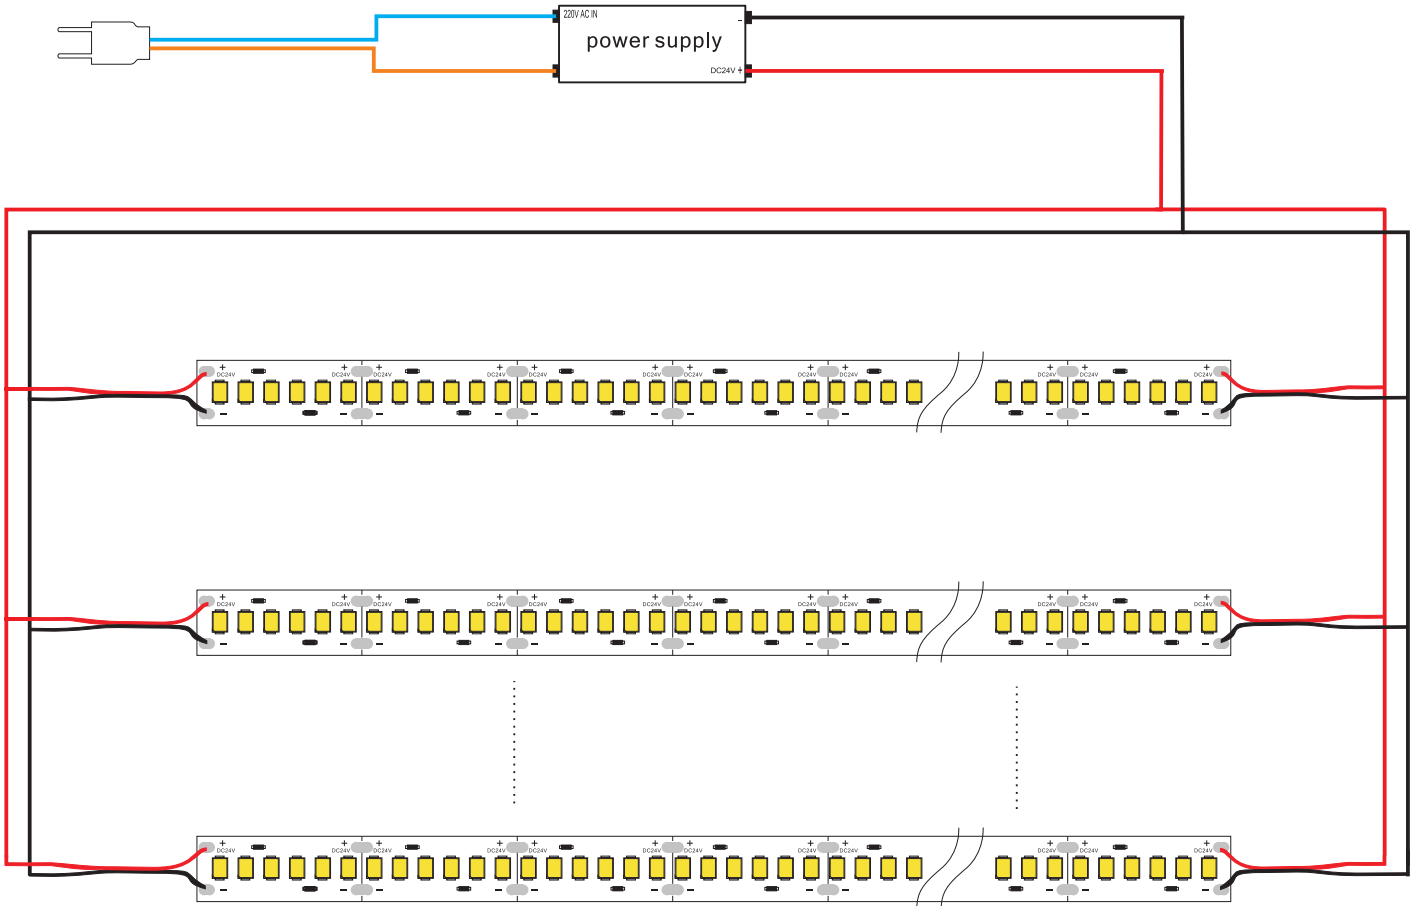


Note that: this products need connect to driver on both ends by adding auxiliary heat dissipation device to use.

### 2835 LR series (240leds/m) packing



3meter/roll



1roll/bag



Carton 360X240X240mm

Operation temperature: -20~50°C

Storage temperature: -30~80°C

Packing: 3meters led strip as one roll, one roll put into one bag, 25bags packed into one carton

25bags/carton