

# Product Specification

5730 LED strip light

(LR series)

LWF-573012/2400WW60

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.08.18	A0



**LEDWIDE LIGHTING CO.,LTD**

Phone: +86 (755) 29362351

Fax: 86 755 29014058

Address : 1-2/F, Building A2,Sinopol Ind.Park, First Industrial Zone,  
BaiHua communities, Guangming office,  
Guangming New District, Shenzhen, P.R. China



LEDWIDE

[www.ledwide.com](http://www.ledwide.com)

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

## 5730 LR series (60leds/m) feature and photo

### Feature:

DC12/24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 5730 SMD led

Led lighting angle: 120°

Led quantity: 60leds/m


Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller

Water-proof rating: IP20

### Photo:

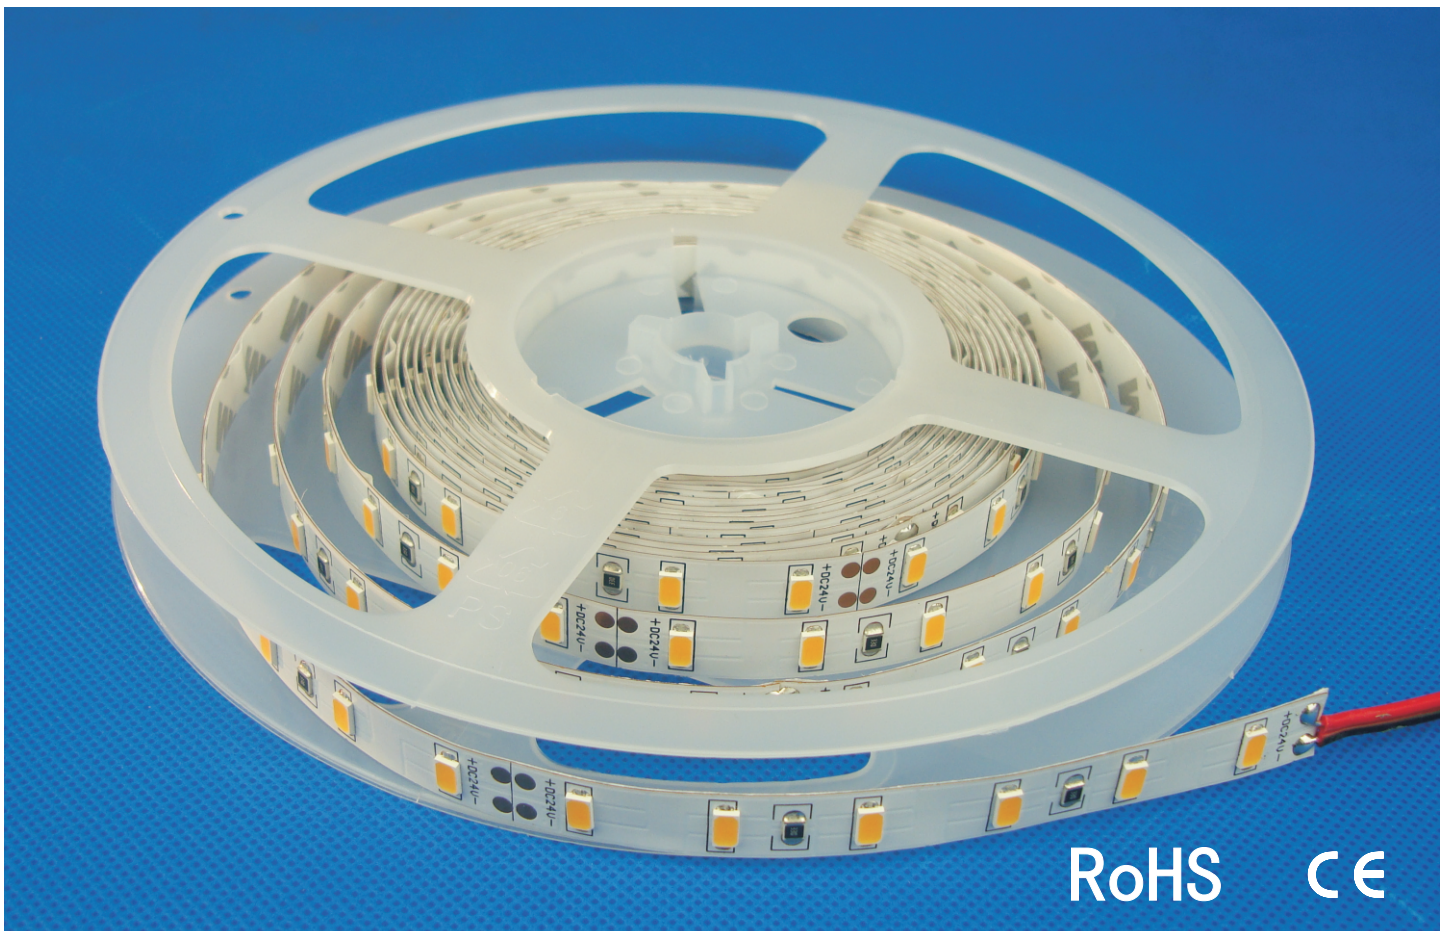



LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司


LEDWIDE LIGHTING CO.,LTD

5730 LR series (60leds/m) dimension chart

Front:

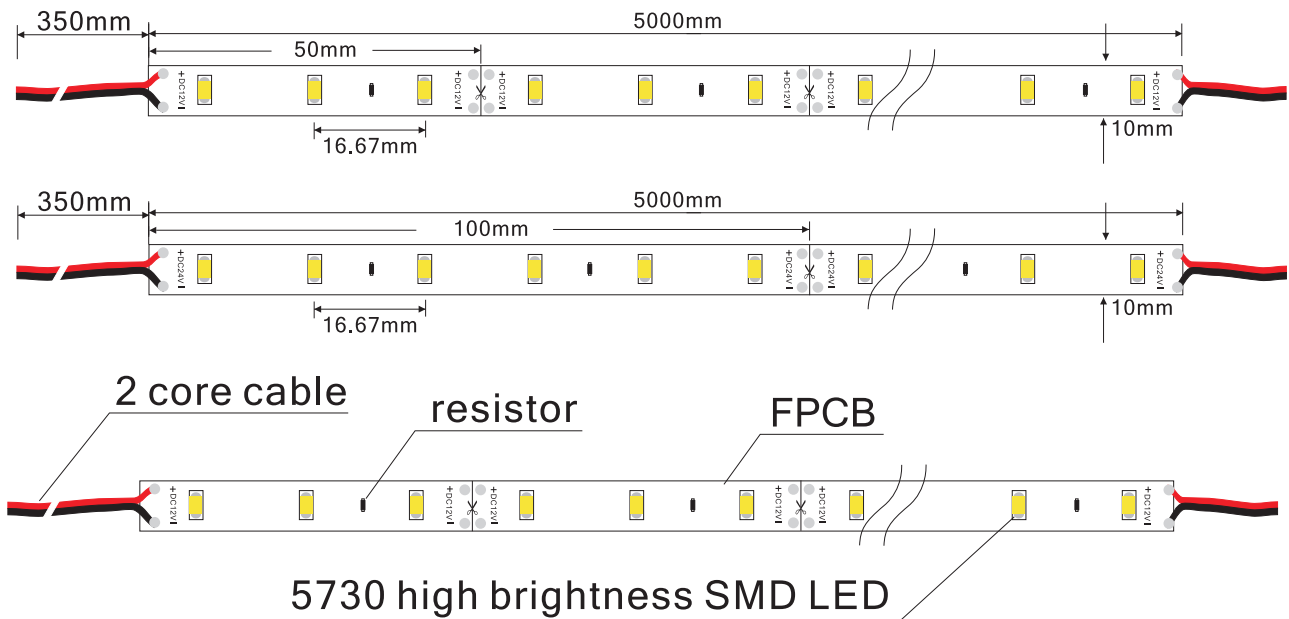

Lateral:



5730 LR series (60leds/m) photoelectric parameterst

LR series led strip: 5730 SMD 60leds/m DC12/24V power:19.2W±10%/M IP rating:IP20

Part-Number	Color	PCB width	Lumen
LWF-573012/2400W60	white	10mm	2024lm
LWF-573012/2400WW60	Warm White	10mm	1687lm





LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

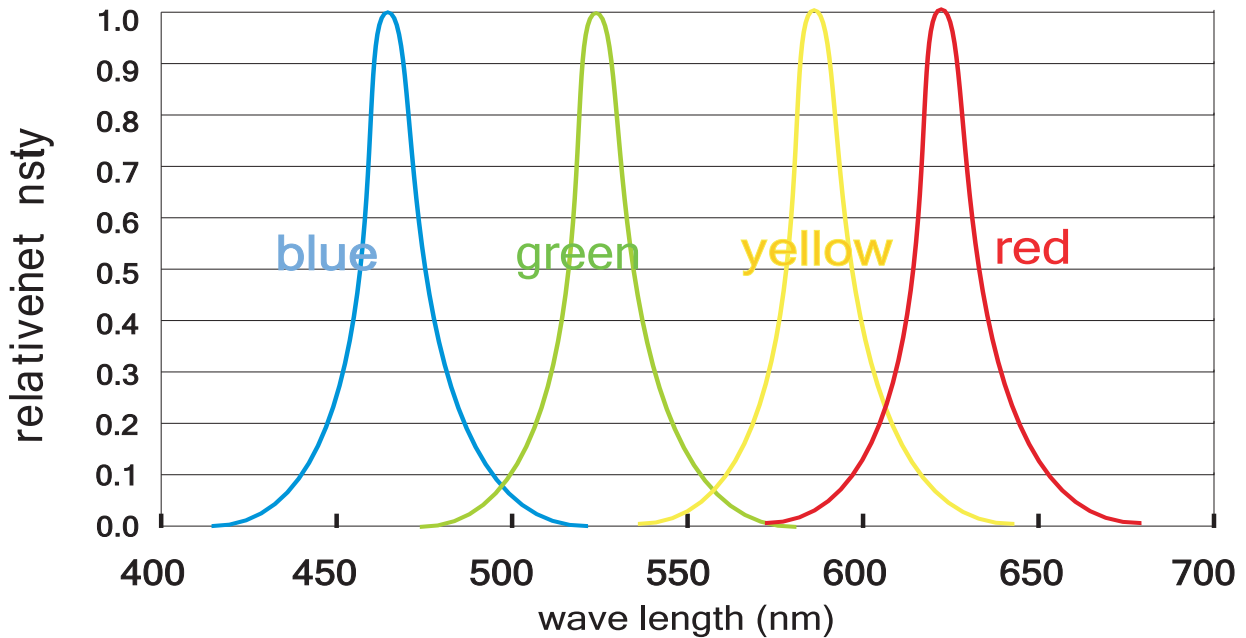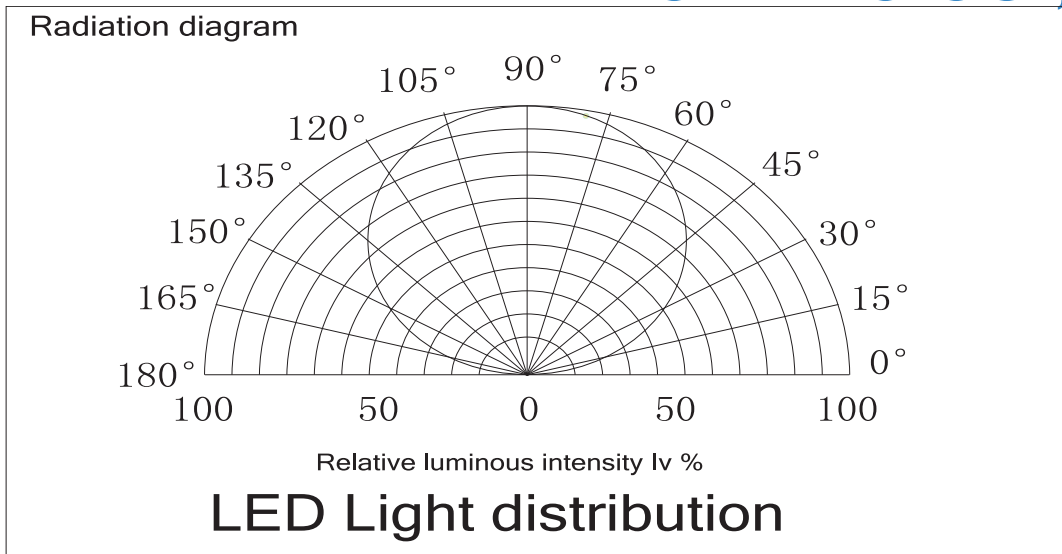

for: red, blue, green, yellow

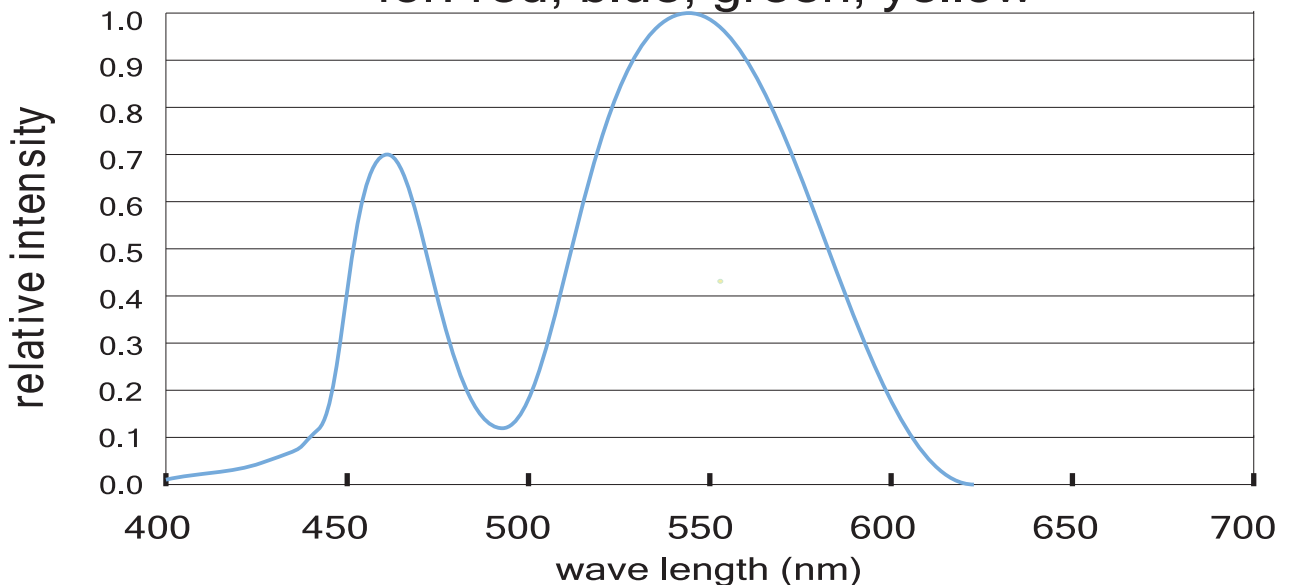

for: white LED




LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD


### 5730 LR series (60leds/m) connection ways

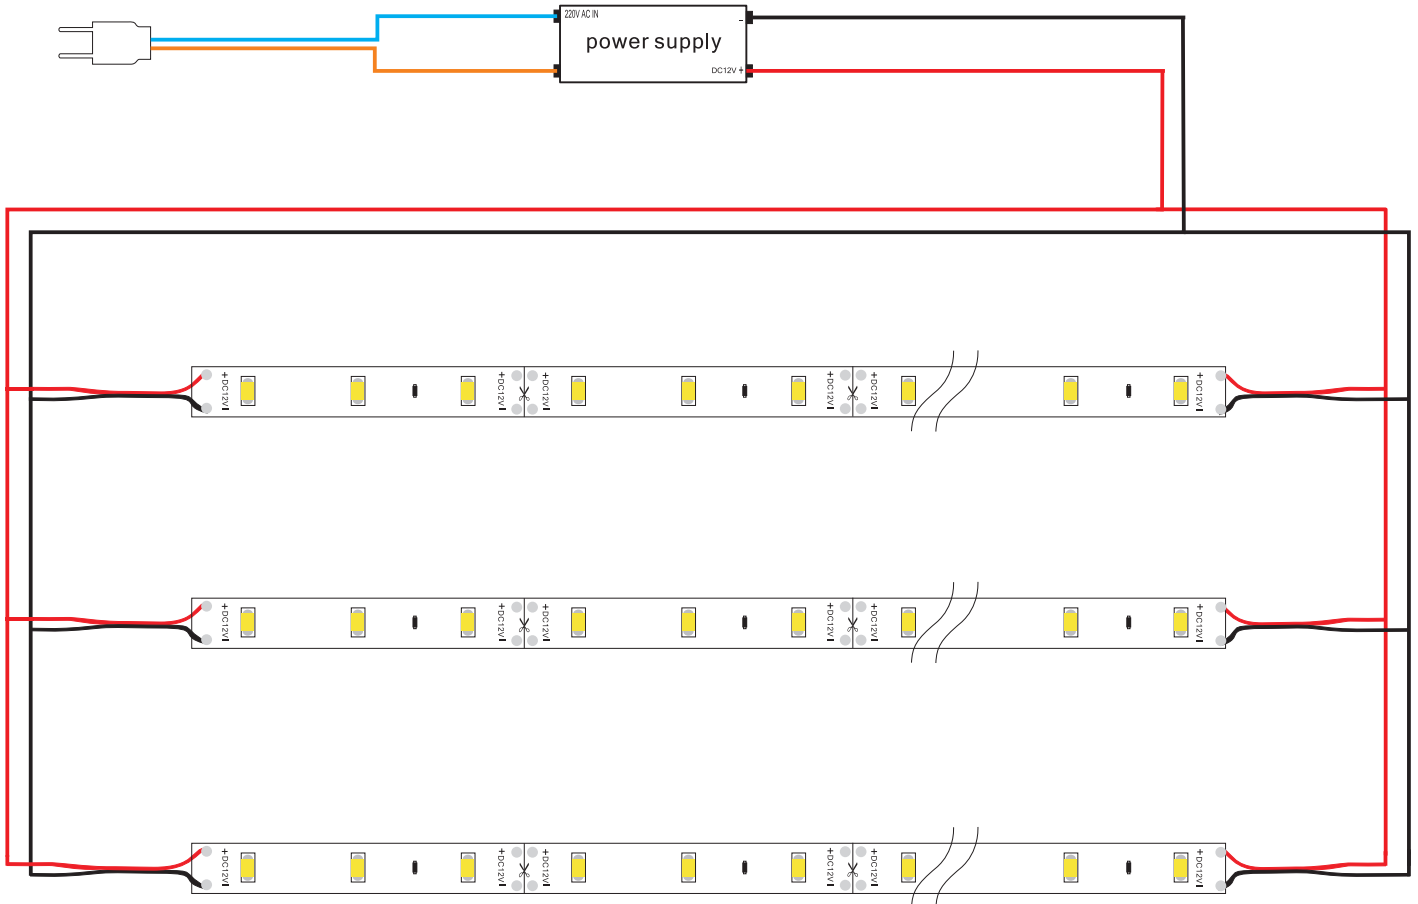

### 5730 LR series (60leds/m) packing



5meter/roll



1roll/bag



Carton360X240X240mm

25bags/carton

Operation temperature:-20~50°C

Storage temperature:-30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 25bags packed into one carton