

Product Specification

3014 LED strip light

(LR series)

LWF-30142400WW240 Single

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.11.27	A0



LEDWIDE LIGHTING CO.,LTD

Phone: +86 (755) 29362351

Fax: 86 755 29014058

Address : 1-2/F, Building A2, Sinopol Ind.Park, First Industrial Zone,
BaiHua communities, Guangming office,
Guangming New District, Shenzhen, P.R. China



LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

3014 LR series (240leds/m) feature and photo

Feature:

DC24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 3014 SMD led

Led lighting angle: 120°

Led quantity: 240leds/m

Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller

Water-proof rating: IP20

Photo:




LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司 LEDWIDE LIGHTING CO.,LTD

3014 LR series (240leds/m) dimension chart

Front:

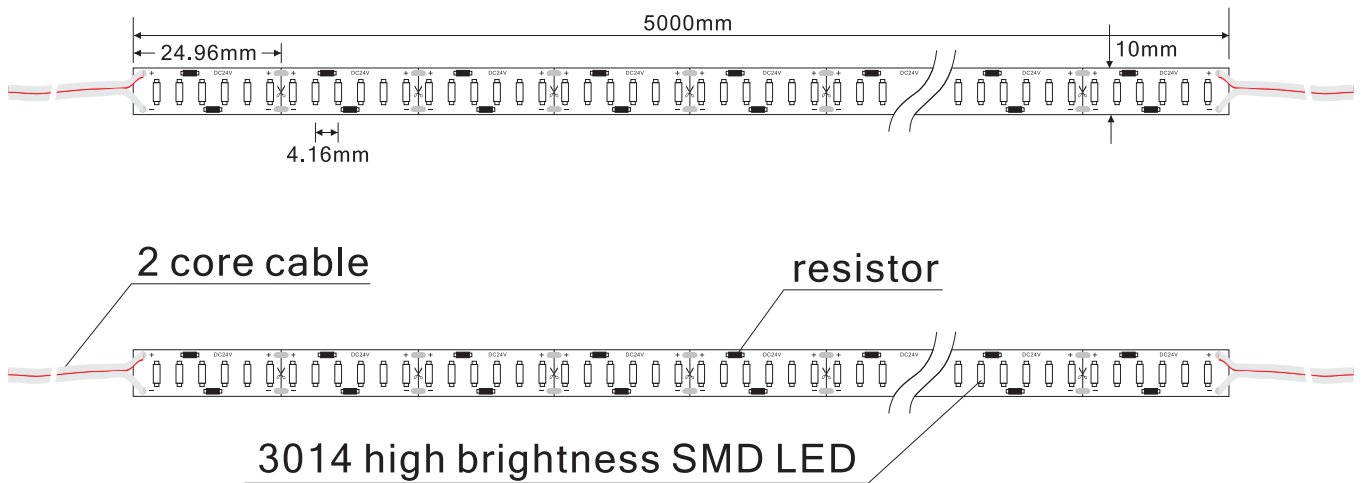

Lateral:



3014 LR series (240leds/m) photoelectric parameterst

LR series led strip: 3014 SMD 240leds/m DC24V power:26.4W±10%/M IP rating:IP20

Part-Number	Color	PCB width	Lumen
LWF-30142400WW240 Single	white	10mm	2400lm/m





LEDWIDE


www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD

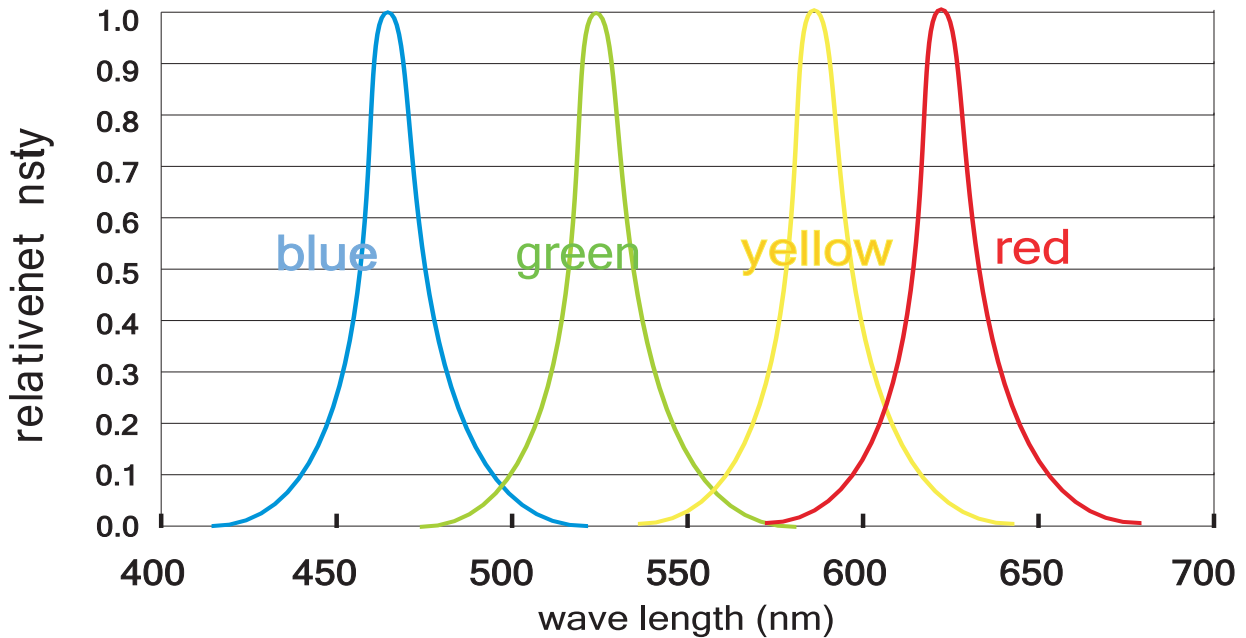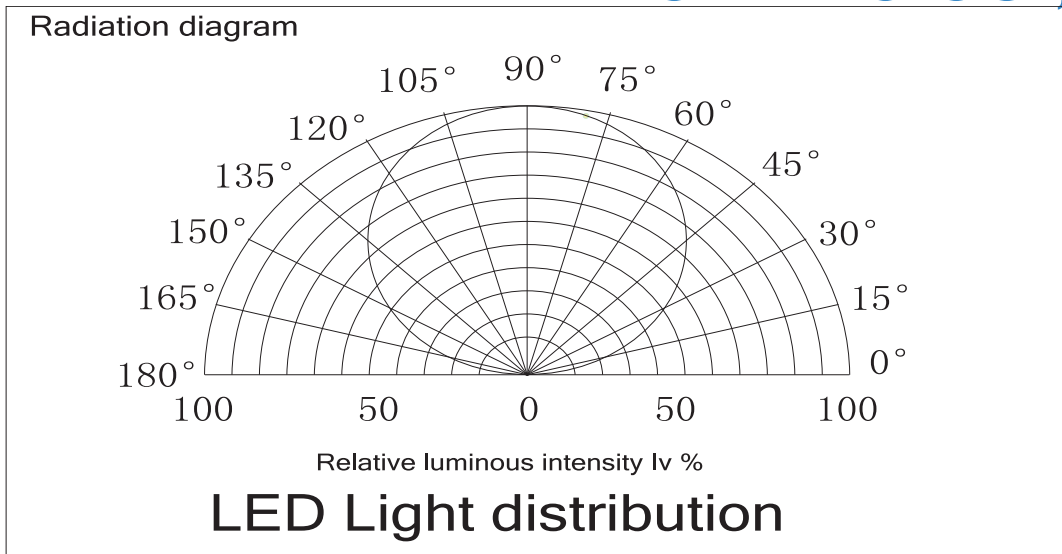

for: red, blue, green, yellow

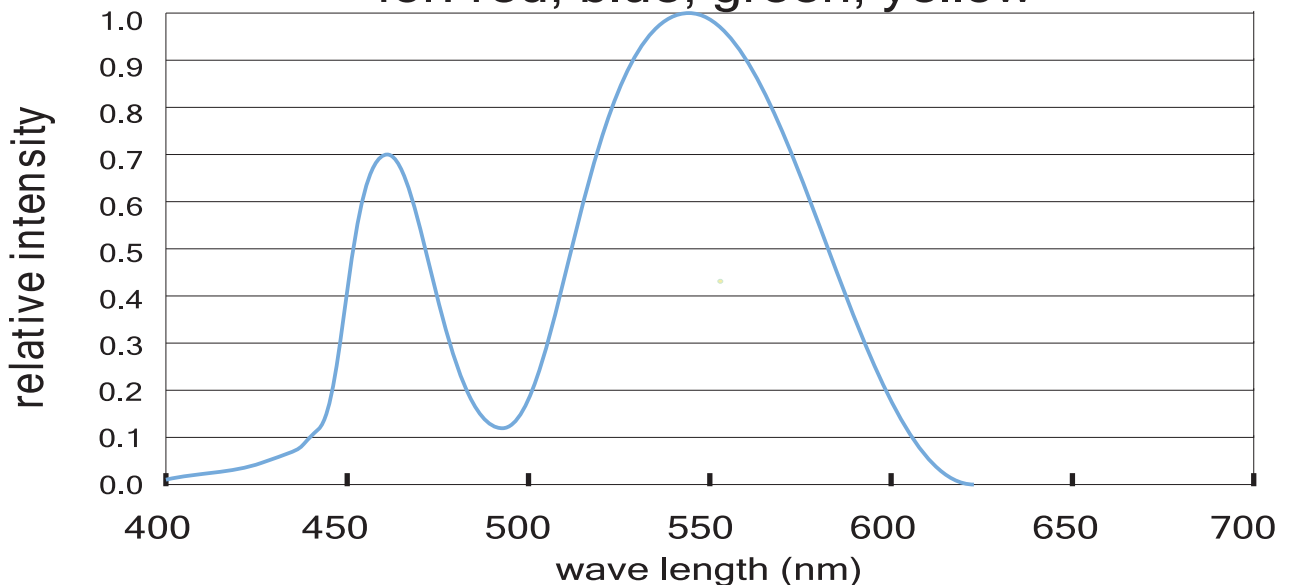

for: white LED



LEDWIDE

www.ledwide.com

深圳市里外光电科技有限公司

LEDWIDE LIGHTING CO.,LTD


3014 LR series (240leds/m) connection ways



3014 ribbon series (240leds/m) packing



5meter/roll



1roll/bag



Carton360X240X240mm

Operation temperature:-20~50°C

Storage temperature:-30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 25bags packed into one carton

25bags/carton