
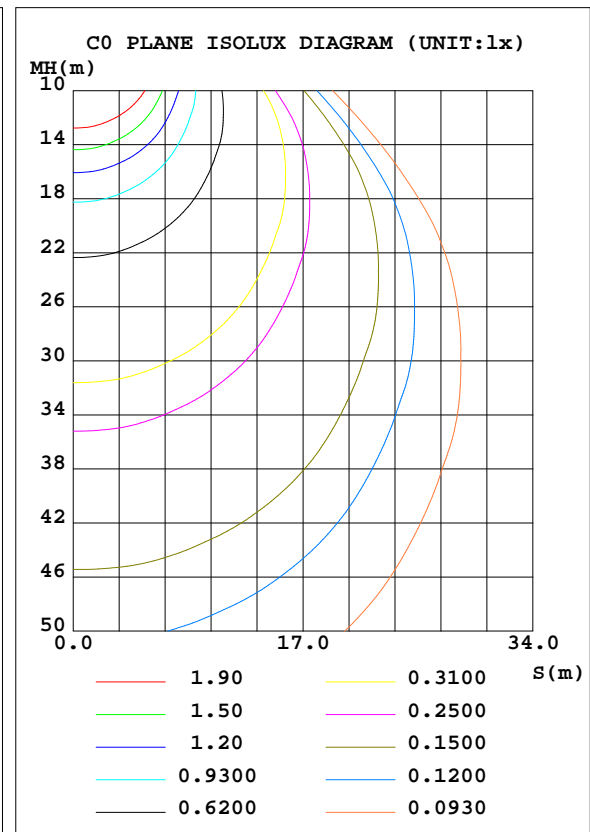


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.56lx1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.90 lm/W			
MODEL	P60-C-9.6W	Imax(cd)	310.0	S/MH(C0/180)	1.24
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	826.56	η UP, DN(C0-180)	0.0,50.6
NOMINAL FLUX(lm)	826.561	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	100.0	CIBSE SHR MAX	1.35

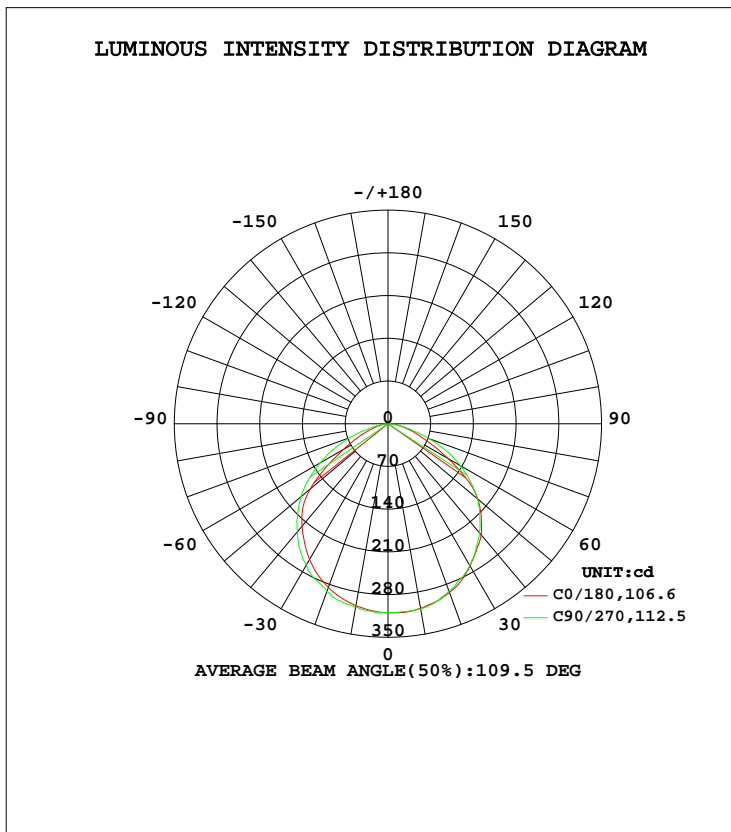

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	307.1	306.9	308.1	305.7	302.7	304.5	305.0	306.2	0- 10	29.36	29.36	3.55,3.55
20	294.4	292.6	291.6	290.1	285.6	291.1	292.6	294.7	10- 20	84.70	114.1	13.8,13.8
30	268.9	266.0	268.1	263.0	256.9	265.9	268.0	271.7	20- 30	129.1	243.2	29.4,29.4
40	237.5	235.7	232.8	222.9	219.1	226.6	231.2	238.4	30- 40	155.8	399.0	48.3,48.3
50	192.3	195.3	191.1	176.1	166.4	176.3	186.3	196.1	40- 50	161.2	560.2	67.8,67.8
60	113.0	145.0	137.0	107.9	84.69	111.9	128.4	131.6	50- 60	137.4	697.6	84.4,84.4
70	51.67	68.30	72.00	43.67	35.75	45.29	65.62	57.05	60- 70	84.84	782.4	94.7,94.7
80	20.23	22.93	19.88	13.12	10.80	11.90	15.83	19.28	70- 80	35.66	818.1	99,99
90	3.585	3.661	0.8285	0.3321	0	0	0.0663	1.790	80- 90	8.191	826.3	100,100
100	0.1344	0	0	0	0	0	0.0676	0	90-100	0.2104	826.5	100,100
110	0	0	0	0	0	0	0.0676	0.0649	100-110	0.0112	826.5	100,100
120	0	0	0	0	0	0	0.0676	0.0667	110-120	0.0151	826.5	100,100
130	0	0	0	0	0	0	0.0676	0.1334	120-130	0.0167	826.5	100,100
140	0	0	0	0	0	0	0.0676	0.1334	130-140	0.0165	826.5	100,100
150	0	0	0	0	0	0	0.0676	0.1334	140-150	0.0131	826.5	100,100
160	0	0	0	0	0	0	0.0676	0.0667	150-160	0.0094	826.6	100,100
170	0	0	0	0	0	0	0.0676	0.0667	160-170	0.0045	826.6	100,100
180	0	0	0.0676	0	0	0	0	0	170-180	0.0016	826.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 480.35 lm

%lum = 58.1%

%lamp = 58.1%

Conical surface Flux(120deg): 697.57 lm

%lum = 84.4%


%lamp = 84.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.561x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

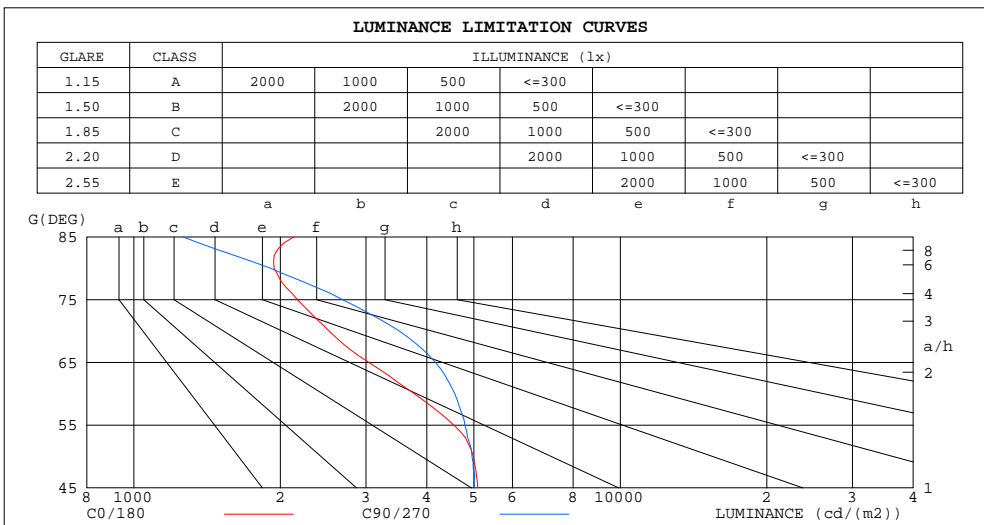

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2135	1260
80	1942	1908
75	2167	2681
70	2518	3509
65	3038	4166
60	3768	4567
55	4550	4793
50	4986	4955
45	5096	5024


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.561x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.93	.90	.91	.89	.88	.86
2.0	.93	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.81	.78	.75	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.75	.69	.65	.72	.68	.64	.62
4.0	.73	.64	.58	.71	.64	.57	.69	.62	.57	.67	.61	.56	.64	.59	.55	.53
5.0	.65	.56	.50	.64	.56	.50	.62	.55	.49	.60	.54	.49	.58	.53	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.43	.54	.48	.43	.53	.47	.42	.40
7.0	.53	.45	.39	.52	.44	.39	.51	.44	.38	.49	.43	.38	.48	.42	.38	.36
8.0	.49	.40	.35	.48	.40	.34	.47	.39	.34	.45	.39	.34	.44	.38	.34	.32
9.0	.45	.37	.31	.44	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.30	.29
10.0	.41	.33	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.28	.26

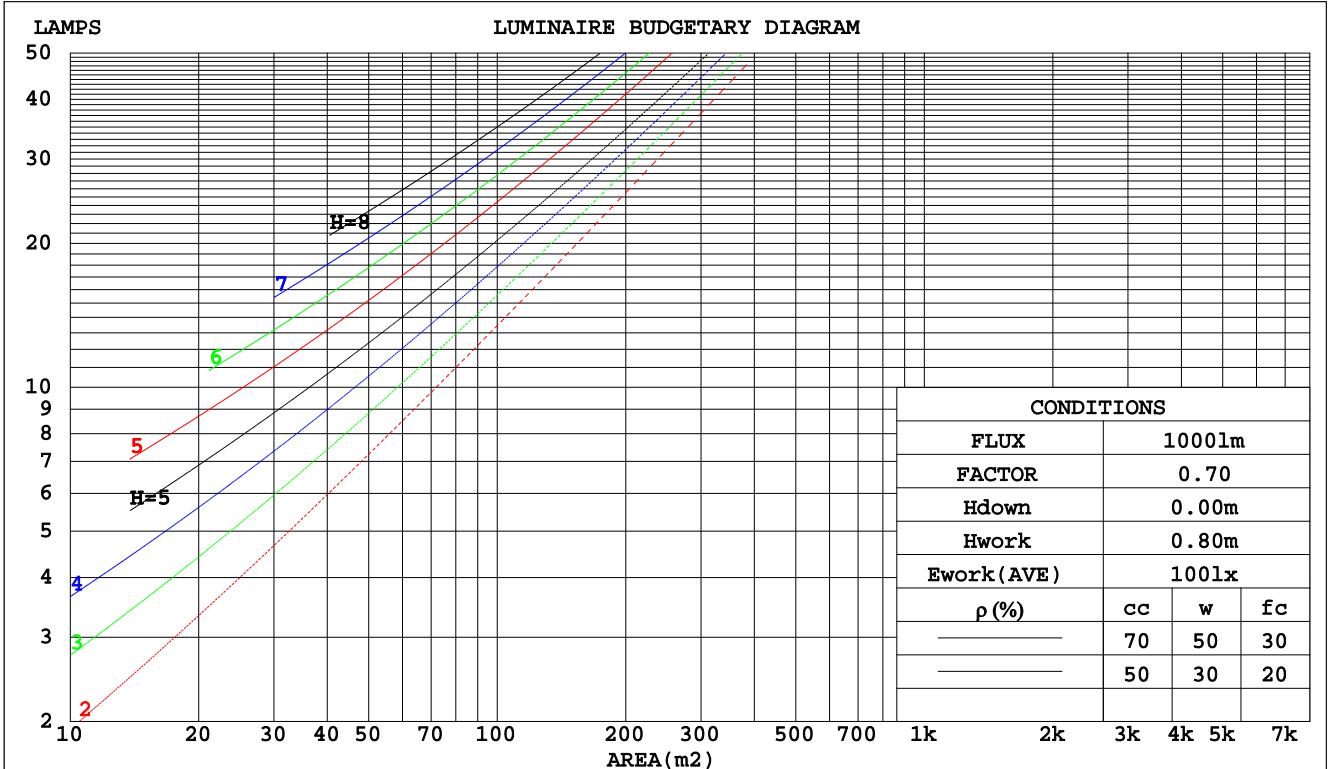

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

WEC AND CCEC

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.561x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.282	.160	.051	.275	.157	.050	.262	.150	.048	.250	.144	.046	.239	.138	.045	
2.0	.271	.149	.046	.265	.146	.045	.253	.141	.044	.243	.136	.043	.233	.132	.042	
3.0	.254	.135	.041	.249	.133	.040	.239	.129	.039	.229	.126	.039	.221	.122	.038	
4.0	.237	.123	.036	.233	.122	.036	.224	.119	.035	.215	.116	.035	.207	.113	.034	
5.0	.221	.113	.033	.217	.111	.032	.209	.109	.032	.202	.106	.032	.195	.104	.031	
6.0	.207	.104	.030	.203	.102	.029	.196	.100	.029	.189	.098	.029	.183	.096	.029	
7.0	.193	.096	.027	.190	.095	.027	.183	.093	.027	.177	.091	.026	.172	.089	.026	
8.0	.181	.088	.025	.178	.088	.025	.172	.086	.025	.167	.085	.024	.162	.083	.024	
9.0	.170	.082	.023	.168	.082	.023	.162	.080	.023	.158	.079	.023	.153	.078	.022	
10.0	.160	.077	.021	.158	.076	.021	.153	.075	.021	.149	.074	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.157	.137	.153	.134	.118	.105	.092	.081	.060	.054	.047	.019	.017	.015	
2.0	.170	.132	.101	.145	.114	.087	.100	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.162	.114	.077	.139	.099	.067	.095	.069	.047	.055	.040	.028	.018	.013	.009	
4.0	.154	.101	.060	.132	.087	.052	.091	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.147	.091	.049	.126	.078	.042	.087	.055	.030	.050	.032	.018	.016	.010	.006	
6.0	.140	.082	.040	.120	.071	.035	.083	.050	.025	.048	.029	.015	.016	.010	.005	
7.0	.134	.075	.034	.115	.065	.030	.079	.046	.021	.046	.027	.013	.015	.009	.004	
8.0	.127	.069	.030	.110	.060	.026	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.105	.056	.023	.073	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.116	.060	.023	.100	.052	.020	.069	.037	.014	.040	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.561x1 lm										
NAME: LED Linear Light					TYPE:LED			WEIGHT:N/A		
SPEC.:N/A					DIM.:			SERIAL No.:N/A		
MFR.: LEDWIDE LIGHTING CO., LTD					SUR.:			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.2	19.7	18.5	19.9	20.1	18.7	20.2	19.0	20.4	20.6
3H	19.0	20.3	19.3	20.5	20.8	19.9	21.3	20.2	21.5	21.7
4H	19.2	20.5	19.5	20.7	21.0	20.3	21.5	20.6	21.8	22.0
6H	19.4	20.6	19.7	20.8	21.1	20.4	21.6	20.7	21.9	22.1
8H	19.4	20.6	19.8	20.9	21.2	20.4	21.6	20.7	21.8	22.1
12H	19.5	20.6	19.8	20.9	21.2	20.4	21.5	20.7	21.8	22.1
4H 2H	18.8	20.1	19.1	20.4	20.6	19.2	20.5	19.6	20.8	21.0
3H	19.7	20.8	20.1	21.1	21.4	20.6	21.7	20.9	22.0	22.3
4H	20.1	21.1	20.4	21.4	21.7	21.0	22.0	21.4	22.3	22.7
6H	20.3	21.2	20.7	21.6	21.9	21.2	22.1	21.6	22.5	22.9
8H	20.4	21.2	20.8	21.6	22.0	21.3	22.1	21.7	22.5	22.9
12H	20.5	21.3	20.9	21.6	22.0	21.3	22.1	21.7	22.4	22.8
8H 4H	20.2	21.1	20.6	21.4	21.8	21.1	21.9	21.5	22.3	22.7
6H	20.6	21.3	21.0	21.7	22.1	21.4	22.1	21.9	22.5	23.0
8H	20.8	21.4	21.2	21.8	22.3	21.5	22.1	22.0	22.6	23.0
12H	20.9	21.5	21.4	21.9	22.4	21.6	22.1	22.1	22.6	23.0
12H 4H	20.2	21.0	20.7	21.4	21.8	21.1	21.8	21.5	22.2	22.6
6H	20.6	21.2	21.1	21.7	22.1	21.5	22.1	21.9	22.5	22.9
8H	20.8	21.4	21.3	21.8	22.3	21.6	22.1	22.1	22.5	23.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.4 / - 0.6					+ 0.3 / - 0.5				
2.0H	+ 0.5 / - 0.8					+ 0.3 / - 0.5				

CIE Pub.117 Corrected 826.6 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.7)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:Seth
Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.3361]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.561x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	48	41	58	48	41	57	47	41	35
0.80	70	58	51	69	58	51	67	57	51	44
1.00	78	68	61	77	67	61	75	68	60	53
1.25	85	76	69	84	75	69	81	74	68	61
1.50	90	81	75	89	80	74	86	79	73	66
2.00	97	89	83	95	88	82	92	86	81	73
2.50	101	93	88	99	92	87	95	89	85	77
3.00	104	97	92	102	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	101	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.5DEG
Operators:Seth
Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity:65.7%
Test Distance:26.000m [K=1.3361]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.56lx1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

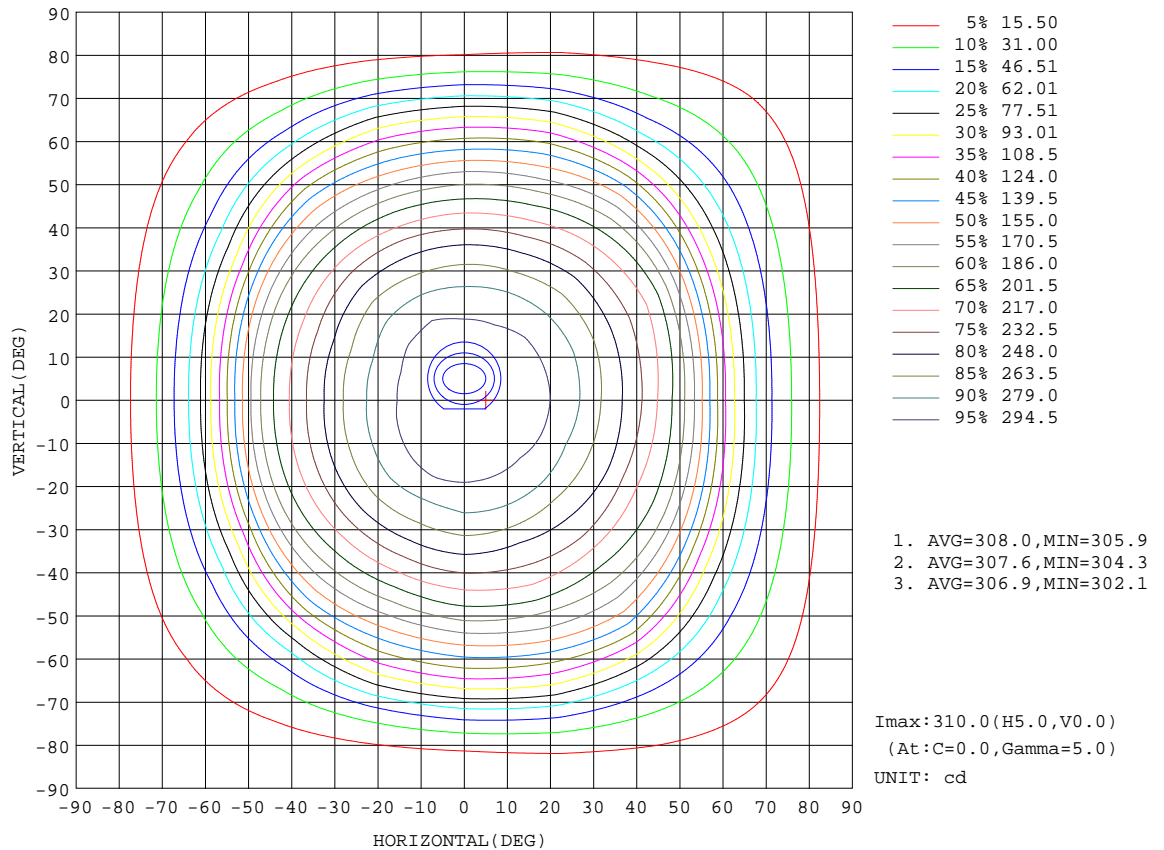


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: Seth
 Test Date: 2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.3361]
 Remarks:

AAI Figure

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.56lx1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

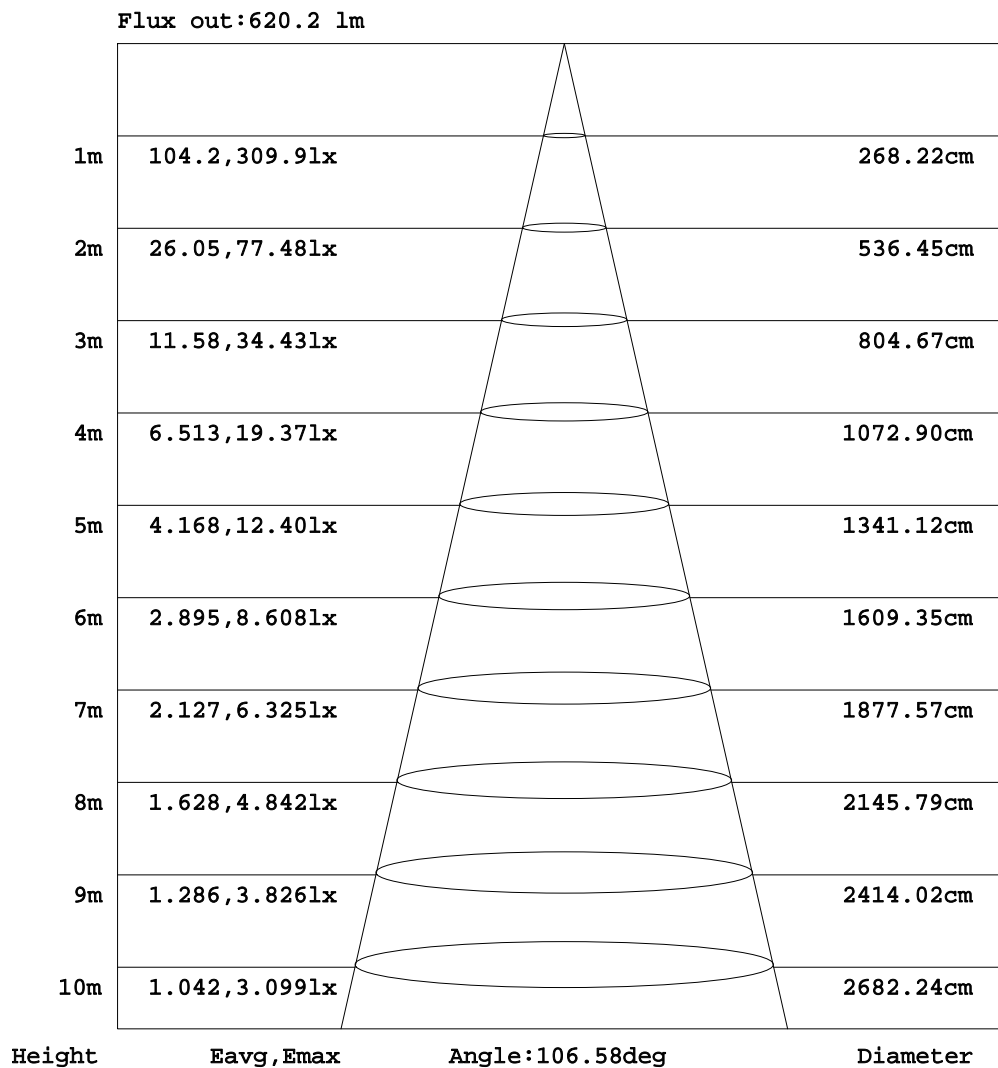


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

ISOLUX DIAGRAM


Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.56lx1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

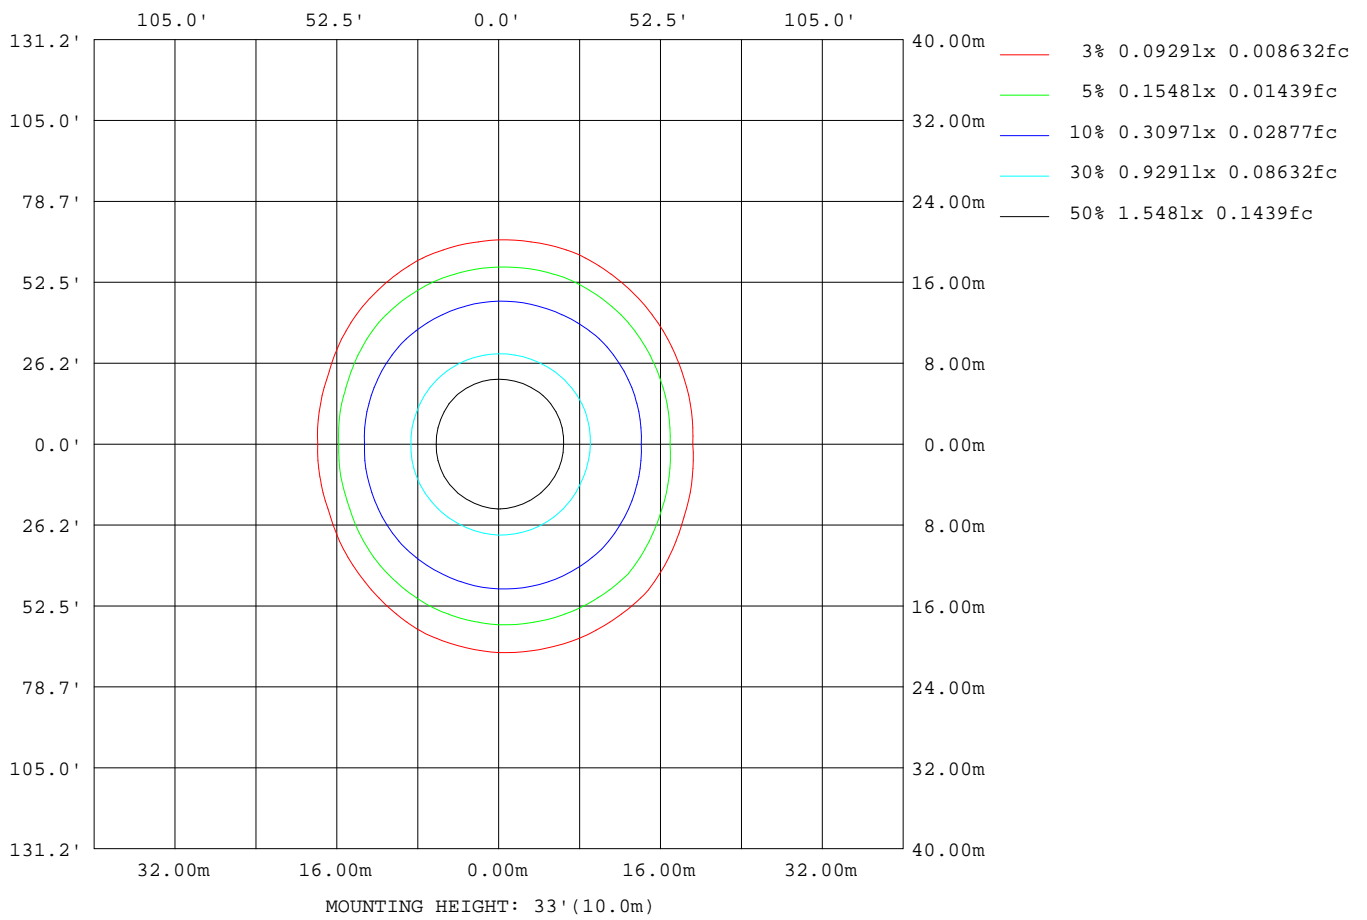

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks:

Planar Illuminance Curve

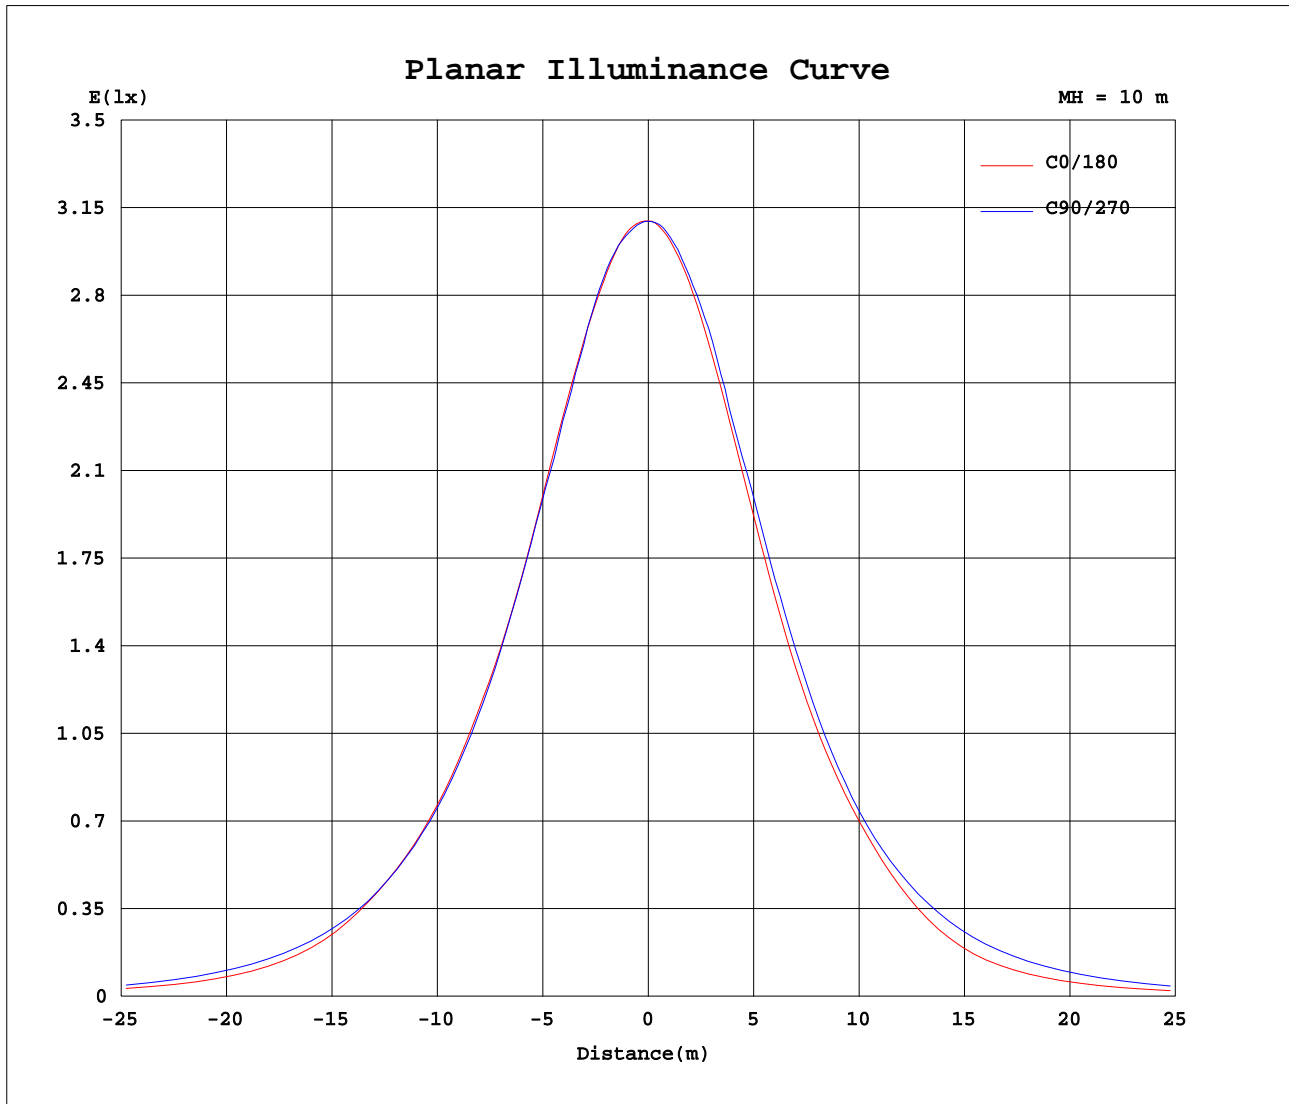

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: Seth
Test Date: 2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.352
Humidity: 65.7%
Test Distance: 26.000m [K=1.3361]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.01V I:0.4364A P:10.48W PF:1.000 Freq:0Hz Lamp Flux:826.561x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	310	309	309	309	310	309	310	310	310	309	309	309	310	309	310	310			
5	310	309	309	309	309	309	310	308	307	307	307	309	309	308	309	310			
10	307	306	307	306	308	307	306	304	303	302	304	306	305	305	306	307			
15	302	301	301	301	303	301	299	297	295	296	299	301	301	300	302	302			
20	294	293	293	292	292	293	290	287	286	286	291	294	293	293	295	294			
25	284	281	282	282	281	278	278	275	273	274	280	283	282	283	285	285			
30	269	267	266	266	268	264	263	260	257	259	266	268	268	270	272	272			
35	253	253	251	249	251	247	244	242	238	241	248	249	251	253	257	256			
40	237	234	236	234	233	227	223	221	219	221	227	230	231	233	238	239			
45	216	214	214	217	213	204	201	200	198	200	202	206	209	213	219	224			
50	192	196	195	195	191	181	176	171	166	172	176	181	186	189	196	201			
55	157	165	172	171	165	155	146	130	123	133	148	153	158	162	168	165			
60	113	125	145	143	137	126	108	88.6	84.7	91.1	112	123	128	133	132	121			
65	77.0	86.5	106	110	106	94.4	71.0	57.6	56.6	59.6	74.7	91.8	97.7	101	90.0	82.3			
70	51.7	56.9	68.3	76.4	72.0	61.1	43.7	36.1	35.8	37.2	45.3	59.7	65.6	67.1	57.0	55.1			
75	33.7	36.4	40.7	45.4	41.6	33.9	25.3	21.0	20.8	21.5	25.2	32.4	36.6	38.2	34.4	34.9			
80	20.2	21.7	22.9	23.4	19.9	16.5	13.1	11.0	10.8	10.9	11.9	14.3	15.8	19.1	19.3	20.5			
85	11.2	11.5	11.4	9.48	6.59	5.97	5.05	3.06	2.31	2.55	3.67	3.65	4.16	7.32	9.24	10.3			
90	3.59	3.96	3.66	2.08	0.83	0.41	0.33	0.07	0.00	0.00	0.00	0.00	0.07	0.39	1.79	2.78			
95	0.20	0.34	0.35	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00			
100	0.13	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.06	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.00			
175	0.00	0.00	0.07	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.00			
180	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:Seth
 Test Date:2016-09-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.352
 Humidity:65.7%
 Test Distance:26.000m [K=1.3361]
 Remarks: