
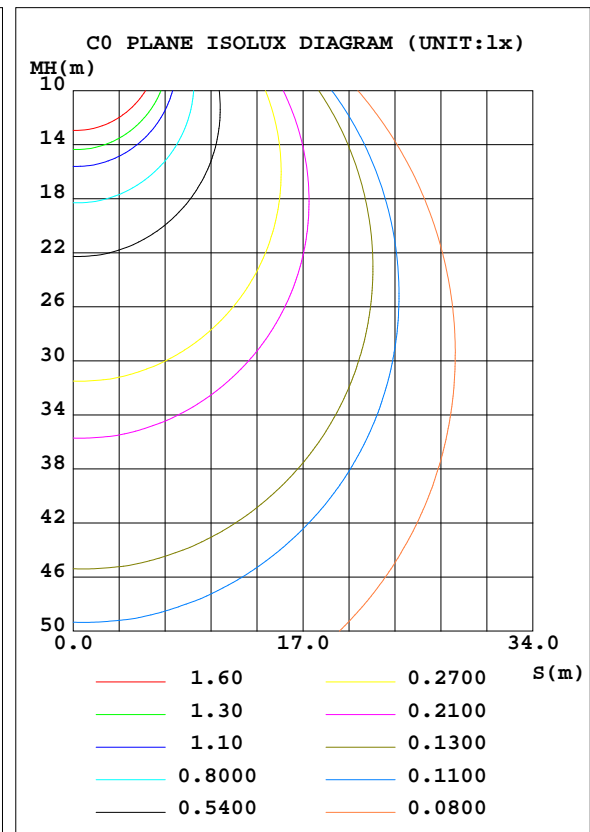


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 34.76 lm/W			
MODEL	WN35-O-21.6W	Imax(cd)	269.6	S/MH(C0/180)	1.24
NOMINAL POWER(W)	21.6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	773.30	η UP, DN(C0-180)	0.0,49.9
NOMINAL FLUX(lm)	773.296	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	100.0	CIBSE SHR MAX	1.35

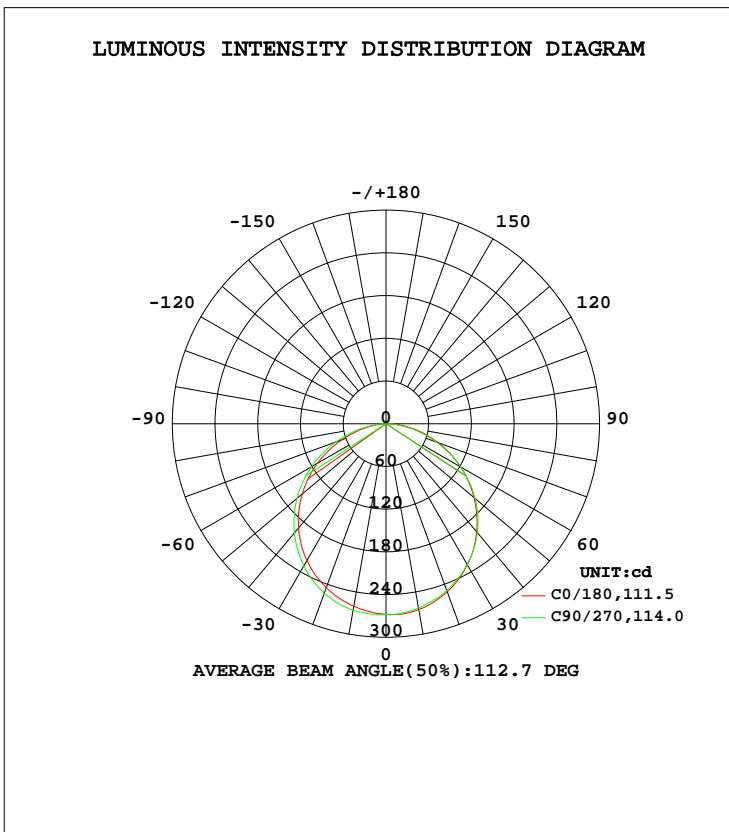

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	264.9	261.7	262.8	263.3	260.2	263.9	266.0	265.7	0- 10	25.39	25.39	3.28,3.28
20	251.1	247.8	249.1	247.6	245.1	251.6	253.3	252.6	10- 20	72.75	98.14	12.7,12.7
30	228.7	227.1	228.3	223.5	222.1	229.9	230.7	230.8	20- 30	110.4	208.5	27,27
40	198.2	199.2	199.7	192.2	191.2	198.9	200.1	201.1	30- 40	133.4	341.9	44.2,44.2
50	161.3	165.8	163.2	154.8	153.7	160.5	163.1	165.6	40- 50	138.7	480.6	62.1,62.1
60	120.8	126.8	121.1	112.4	111.3	116.7	120.9	125.0	50- 60	125.6	606.2	78.4,78.4
70	78.13	82.77	75.31	67.62	65.83	70.29	74.92	80.71	60- 70	96.02	702.2	90.8,90.8
80	36.94	38.09	31.59	25.53	24.13	26.33	29.94	36.75	70- 80	55.26	757.5	98,98
90	4.287	3.456	1.480	0.1379	0	0	0.0678	3.072	80- 90	15.53	773.0	100,100
100	0	0	0	0	0	0	0.0682	0	90-100	0.1558	773.2	100,100
110	0	0	0	0	0	0	0.0682	0.0671	100-110	0.0116	773.2	100,100
120	0	0	0	0	0	0	0.0682	0.1342	110-120	0.0182	773.2	100,100
130	0	0	0	0	0	0	0.0682	0.1342	120-130	0.0189	773.2	100,100
140	0	0	0.0682	0	0	0	0.0682	0.1342	130-140	0.0177	773.3	100,100
150	0	0	0.0682	0	0	0	0.0682	0.1342	140-150	0.0159	773.3	100,100
160	0	0	0.1363	0	0	0	0.0682	0.1342	150-160	0.0128	773.3	100,100
170	0	0	0.1363	0	0	0	0.0682	0.1342	160-170	0.0096	773.3	100,100
180	0	0	0.1363	0	0	0	0.0682	0.1342	170-180	0.0037	773.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 411.75 lm

%lum = 53.2%

%lamp = 53.2%

Conical surface Flux(120deg): 606.22 lm

%lum = 78.4%


%lamp = 78.4%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

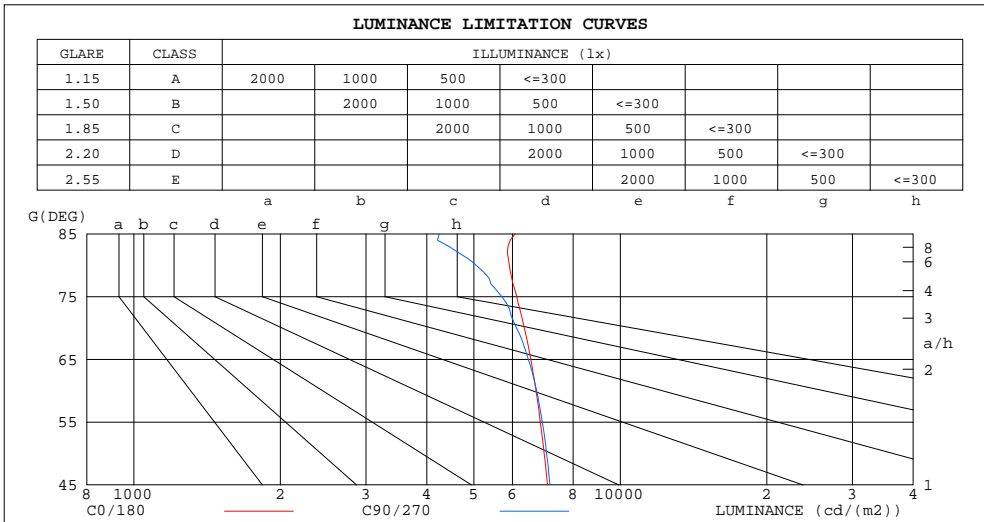

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6077	4240
80	5909	5053
75	6124	5703
70	6346	6116
65	6548	6468
60	6710	6729
55	6848	6912
50	6972	7055
45	7086	7167


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.52	.62	.56	.52	.50
5.0	.63	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

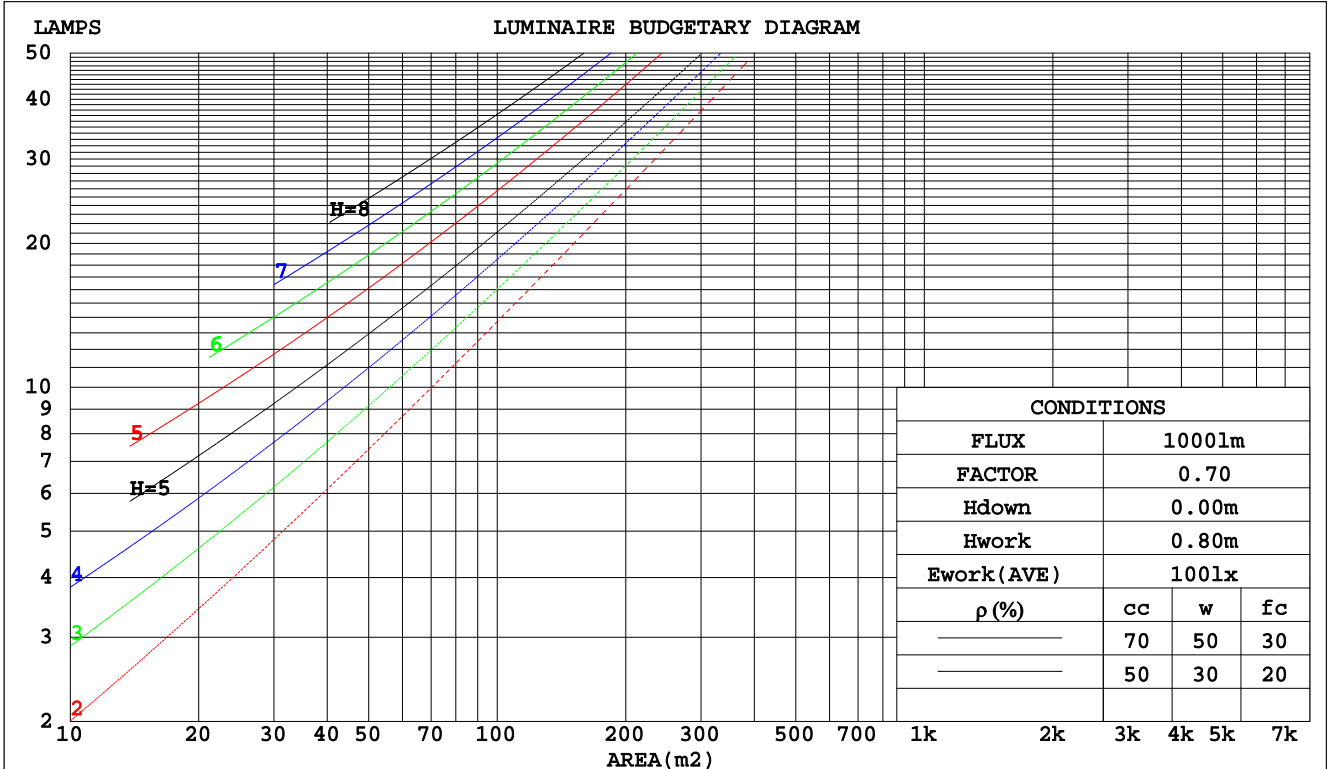

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.178	.056	.305	.174	.055	.292	.167	.053	.280	.161	.052	.268	.156	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.265	.148	.046	.255	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.075	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.116	.106	.092	.080	.061	.053	.047	.020	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.076	.033	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

## UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm										
NAME: LED Linear Light					TYPE:LED			WEIGHT:N/A		
SPEC.:N/A					DIM.:			SERIAL No.:N/A		
MFR.: LEDWIDE LIGHTING CO., LTD					SUR.:			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.7	21.2	19.9	21.4	21.6	19.8	21.3	20.1	21.5	21.7
3H	21.3	22.7	21.6	23.0	23.2	21.3	22.7	21.6	23.0	23.2
4H	22.0	23.3	22.3	23.6	23.8	21.9	23.3	22.2	23.5	23.8
6H	22.5	23.8	22.9	24.1	24.3	22.4	23.6	22.7	23.9	24.2
8H	22.7	24.0	23.1	24.2	24.5	22.5	23.7	22.8	24.0	24.3
12H	22.9	24.1	23.2	24.4	24.7	22.5	23.7	22.9	24.0	24.3
4H 2H	20.4	21.7	20.7	22.0	22.2	20.5	21.8	20.8	22.1	22.3
3H	22.2	23.4	22.5	23.7	24.0	22.2	23.4	22.5	23.7	24.0
4H	23.0	24.1	23.4	24.4	24.7	22.9	24.0	23.3	24.3	24.7
6H	23.7	24.6	24.1	25.0	25.4	23.5	24.5	23.9	24.8	25.2
8H	24.0	24.8	24.4	25.2	25.6	23.7	24.6	24.1	24.9	25.3
12H	24.2	25.0	24.6	25.4	25.8	23.8	24.6	24.2	25.0	25.4
8H 4H	23.3	24.2	23.8	24.6	25.0	23.3	24.2	23.7	24.5	24.9
6H	24.2	24.9	24.6	25.3	25.8	24.0	24.7	24.4	25.1	25.6
8H	24.6	25.2	25.0	25.7	26.1	24.3	24.9	24.7	25.3	25.8
12H	24.9	25.5	25.4	25.9	26.4	24.5	25.0	24.9	25.5	25.9
12H 4H	23.4	24.2	23.8	24.6	25.0	23.3	24.1	23.7	24.5	24.9
6H	24.3	24.9	24.7	25.4	25.8	24.1	24.7	24.5	25.2	25.6
8H	24.7	25.3	25.2	25.7	26.2	24.4	25.0	24.9	25.4	25.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 773.3 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.9)

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.5DEG  
Operators:Seth  
Test Date:2016-09-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
Humidity:65.7%  
Test Distance:26.000m [K=1.3361]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	75	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

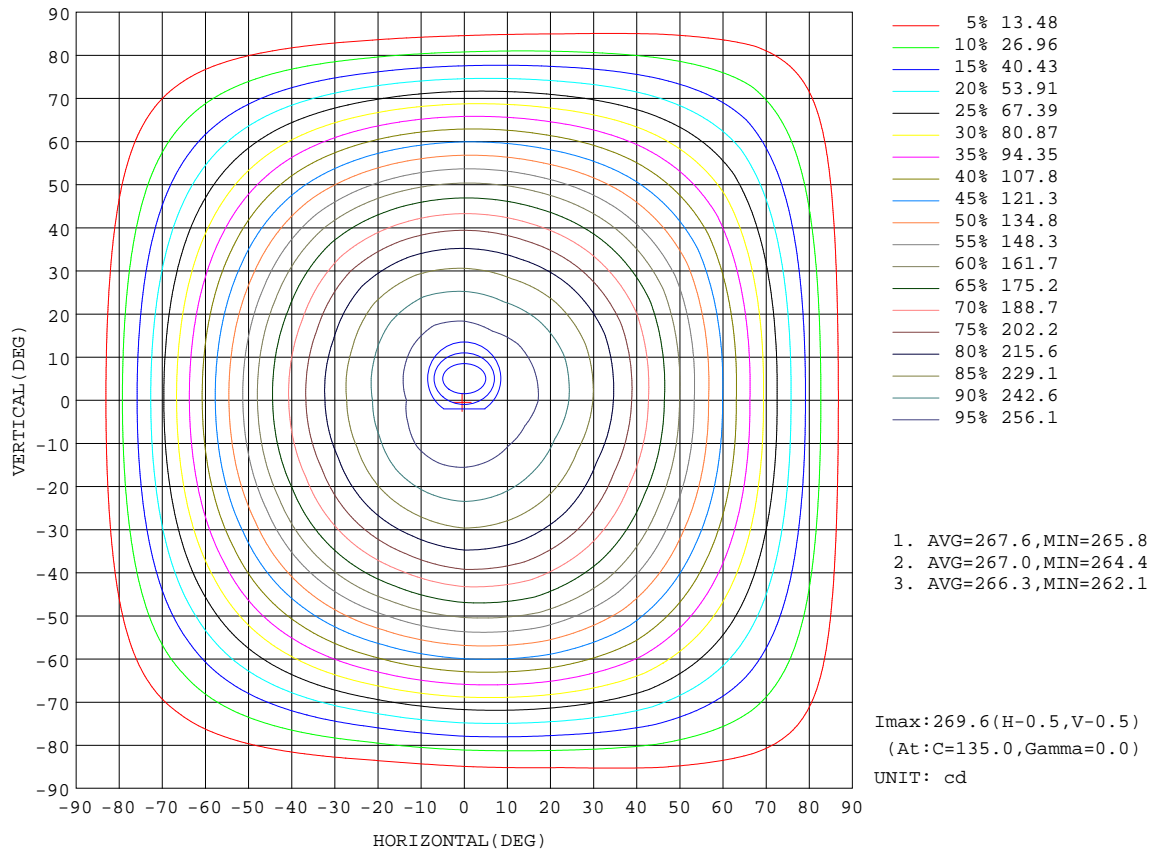


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: Seth  
 Test Date: 2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.3361]  
 Remarks:



AAI Figure

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

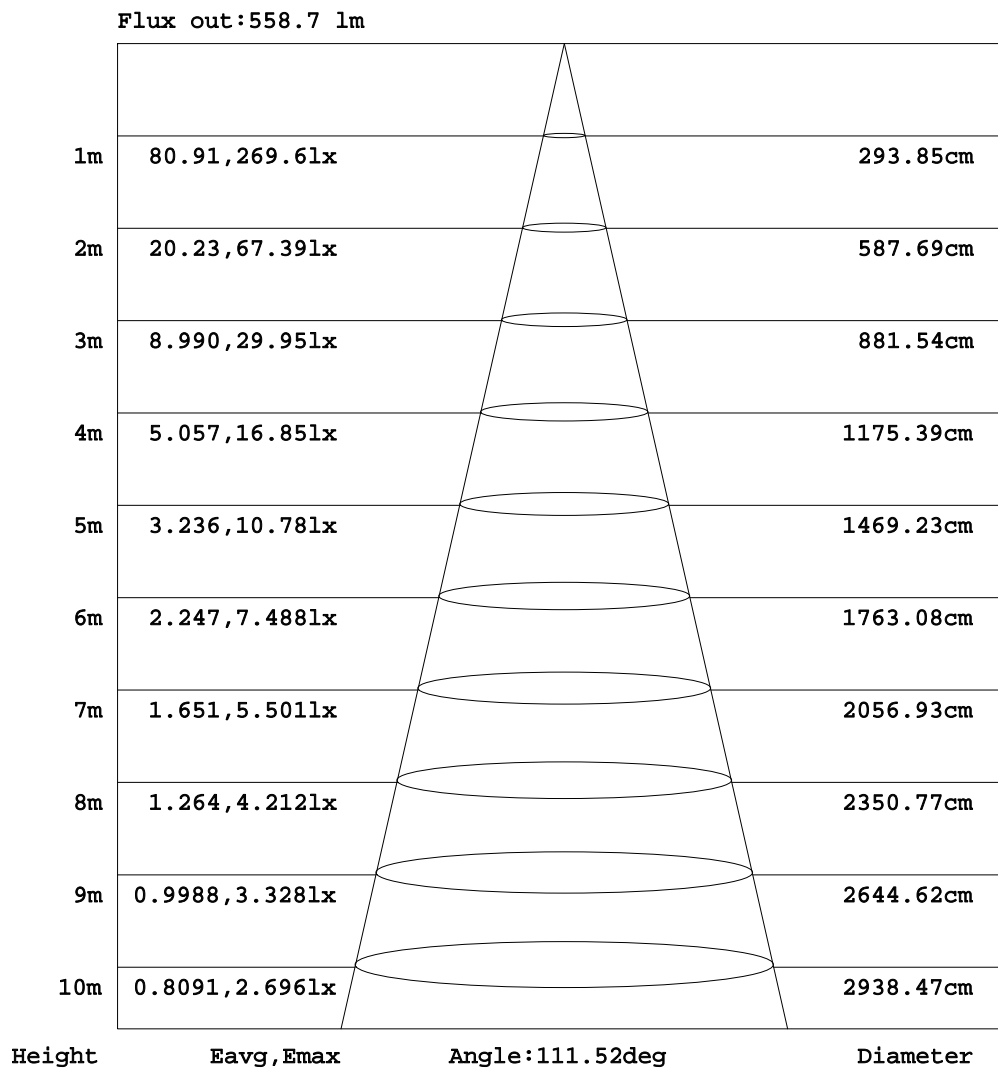


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

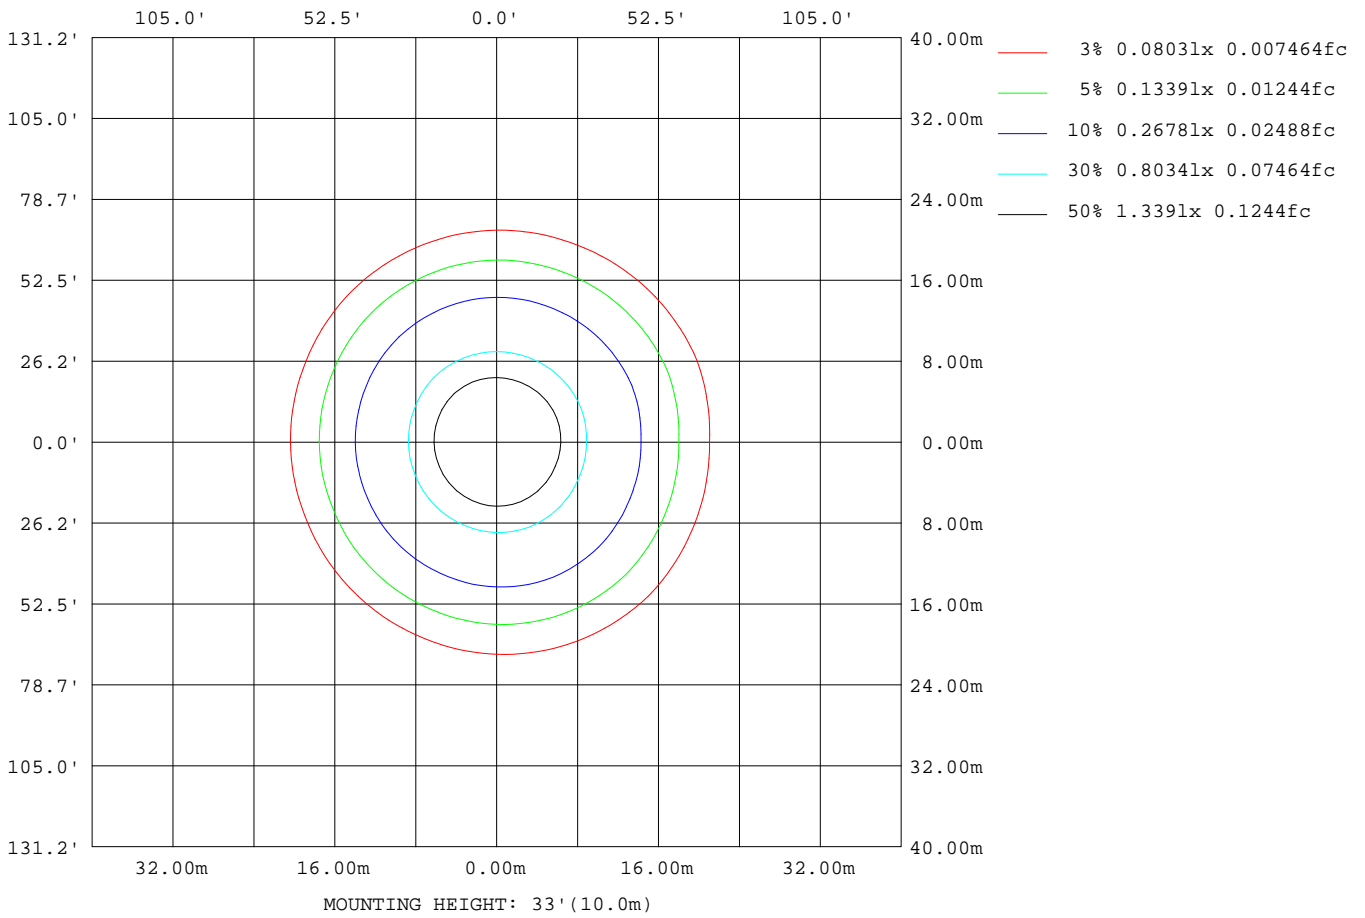

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks:

### Planar Illuminance Curve

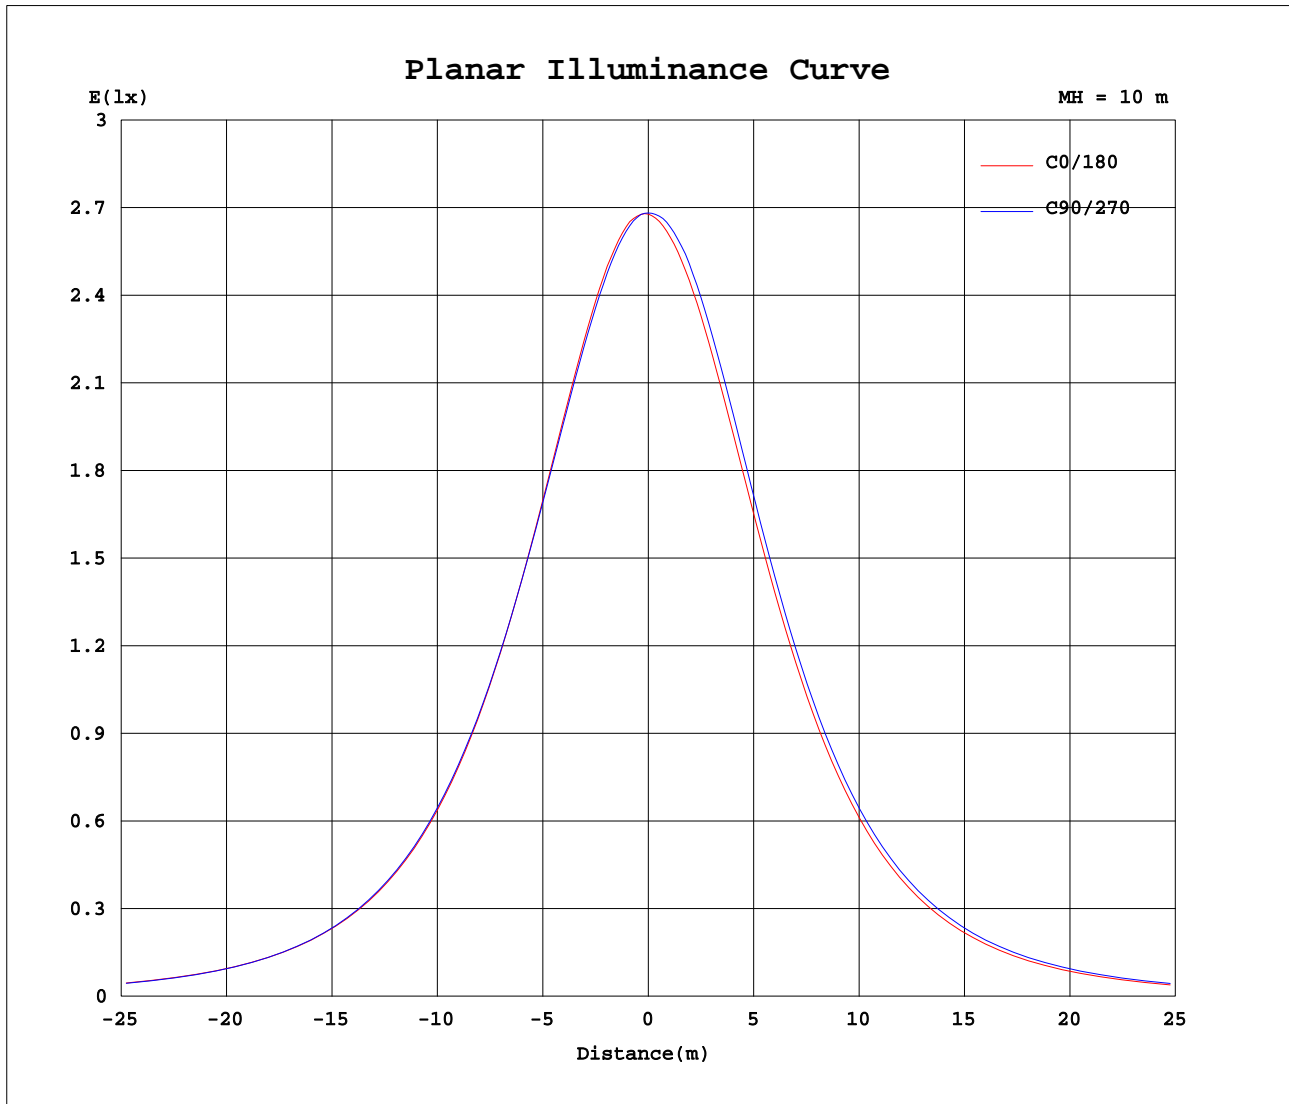

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 24.5DEG  
Operators: Seth  
Test Date: 2016-09-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
Humidity: 65.7%  
Test Distance: 26.000m [K=1.3361]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.9267A P:22.24W PF:1.000 Freq:0Hz Lamp Flux:773.296x1 lm		
NAME: LED Linear Light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	268	268	267	268	268	269	270	268	268	268	267	268	268	269	270	268			
5	268	267	266	267	267	268	268	266	265	266	267	268	268	268	269	268			
10	265	263	262	262	263	264	263	262	260	263	264	266	266	265	266	265			
15	259	256	256	256	257	257	257	255	254	257	259	261	261	259	261	260			
20	251	248	248	249	249	249	248	245	245	248	252	254	253	252	253	252			
25	241	238	238	239	240	238	236	234	235	238	242	244	243	242	243	243			
30	229	225	227	228	228	226	224	221	222	225	230	232	231	229	231	231			
35	214	212	214	215	215	211	209	206	208	210	215	217	216	215	217	217			
40	198	196	199	201	200	195	192	190	191	193	199	200	200	200	201	202			
45	180	179	183	185	182	177	174	172	173	175	180	182	182	182	184	185			
50	161	162	166	167	163	158	155	152	154	156	160	162	163	164	166	167			
55	141	143	147	147	143	137	134	131	133	135	139	141	143	143	146	148			
60	121	123	127	126	121	116	112	110	111	113	117	119	121	122	125	127			
65	99.6	102	105	103	98.4	93.2	90.1	87.8	88.7	90.2	93.7	95.7	98.1	99.7	103	105			
70	78.1	80.6	82.8	79.3	75.3	70.4	67.6	65.4	65.8	67.5	70.3	72.2	74.9	77.1	80.7	83.5			
75	57.1	58.8	60.1	56.5	53.1	48.0	45.7	43.6	43.9	45.4	47.5	49.0	51.9	54.6	58.4	61.3			
80	36.9	38.5	38.1	34.4	31.6	27.2	25.5	23.9	24.1	24.9	26.3	27.5	29.9	33.2	36.8	39.8			
85	19.1	19.7	19.0	15.3	13.3	10.2	8.98	7.58	7.53	8.07	8.99	10.1	12.0	14.5	18.0	20.4			
90	4.29	4.20	3.46	1.96	1.48	0.34	0.14	0.13	0.00	0.00	0.00	0.07	0.07	1.32	3.07	4.37			
95	0.07	0.07	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.00	0.00		
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.07	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
140	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
145	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
150	0.00	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
155	0.00	0.00	0.00	0.00	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
160	0.00	0.00	0.00	0.00	0.14	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
165	0.00	0.00	0.00	0.00	0.14	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
170	0.00	0.00	0.00	0.00	0.14	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
175	0.00	0.00	0.00	0.00	0.14	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			
180	0.00	0.00	0.00	0.07	0.14	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.13	0.13	0.00			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:Seth  
 Test Date:2016-09-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.352  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3361]  
 Remarks: