





















Ledwide Curved Profiles Series




Bored of being straight? You are on the right page here.

With the curved profile range your imagination is the only limit to the design.

With the use of the variety of customized angled curves and different lengths of straight profiles it is possible to design unique fixtures for your individual projects.

MODEL	PICTURE	PROFILE	INSTALLATION	MIN. RADIUS	WEIGHT (KG/M)	PAGES
LW-C25					0.5	8
LW-C35					0.9	9
LW-CR35					0.9	10
LW-C50N					2.0	11
LW-C50S					0.6	12
LW-CR50					1.4	13
LW-CS35					0.4	14
LW-CS50					0.7	15

MODEL	PICTURE	PROFILE	INSTALLATION	MIN. RADIUS	WEIGHT (KG/M)	PAGES
LW-C25H					0.7	16
LW-CX80					1.4	17
LW-CX100					1.6	18
LW-CRX80					1.4	19
LW-CRX100					1.7	20

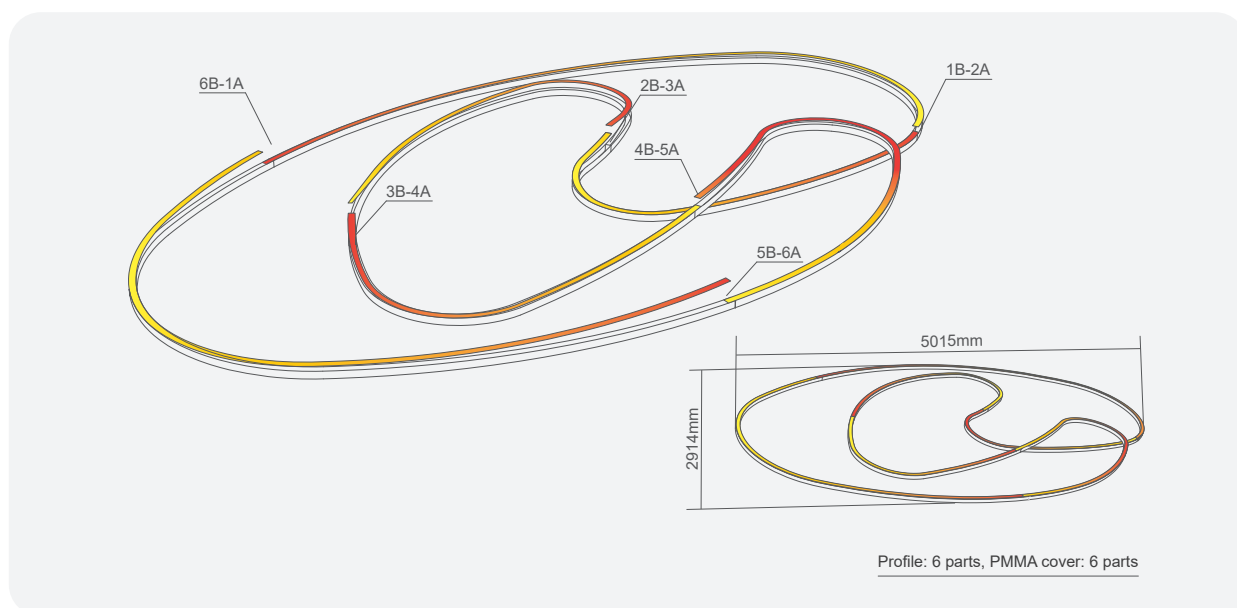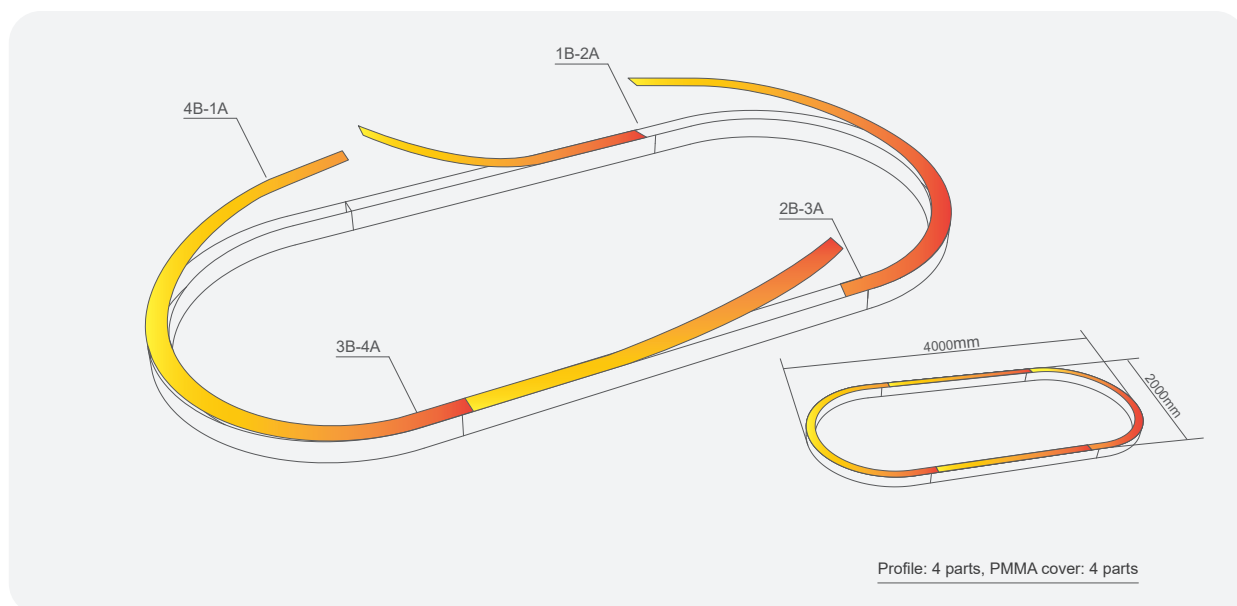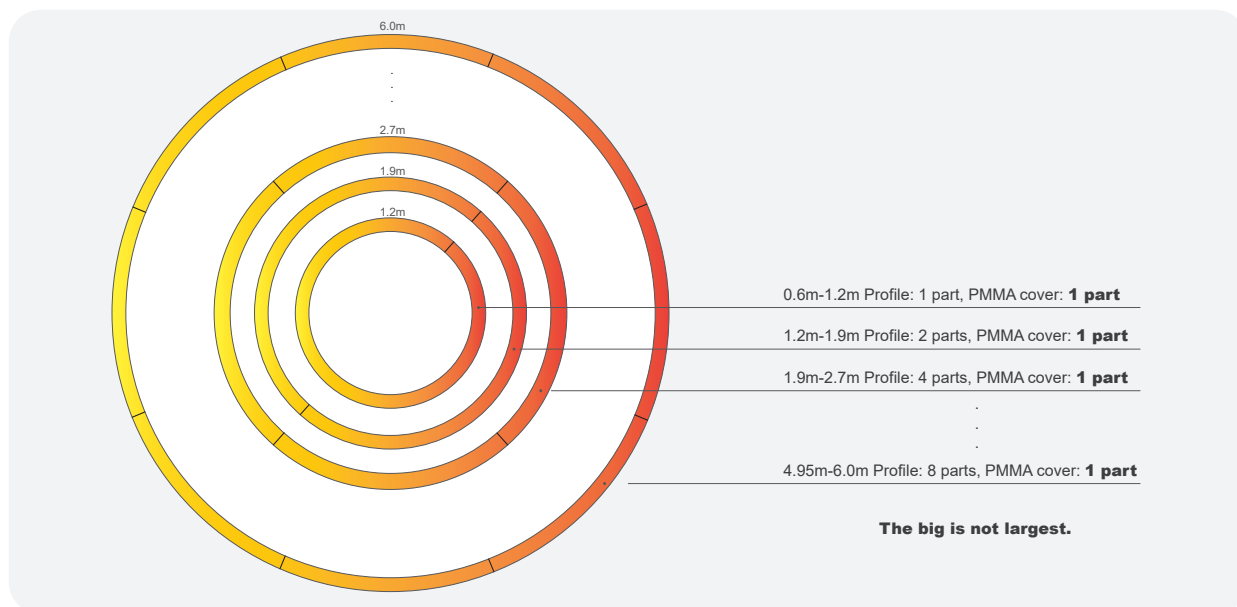

It is PMMA diffuser

- Same color and material as the ones used on the straight profiles, uniform effect.

Click on diffuser

- Easier to install.

One continuous length

For circles, whatever the diameter is, there is only one connection.

Higher light transmission

- New Opal dots free diffuser can reach 74% light trans

6m Diffuser in 1 segment, no gap.



No MOQ, No Mold cost

Every model we have the min. radius we can do, If you select from our range, no smaller than that radius, you can be benefit:

No MOQ


- Whatever any size, we can do one piece for you.

No Mold cost

- We customize any size for you, no extra mold cost.

Any shape

- Whether it is round or oval or other shapes, we can customize as per your drawing.

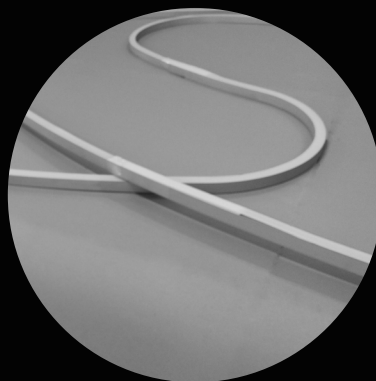

Short delivery time

Our stock for raw material (before bending) is non-anodized, for hot selling items we have enough stock.

If we have stock, the delivery time is:

3-5 days for bending

7 days for color painting

If we are out of stock, the delivery time is:

15 days for material production




3-5 days for bending

7 days for color painting



25mm wide LED Curved Extrusion Profile


LW-C25

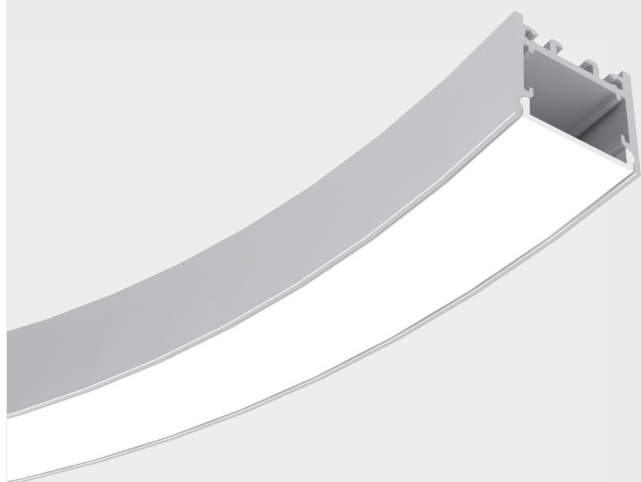

Circular Rings

Smallest: Ø600mm

Largest: no limitation

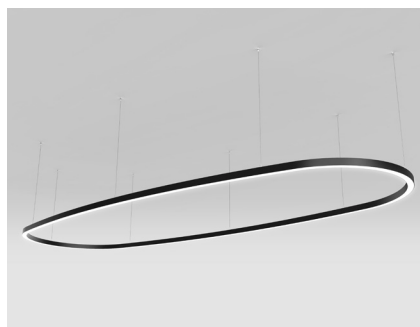

Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White






Black



RAL

35mm wide LED Curved Extrusion Profile

LW-C35

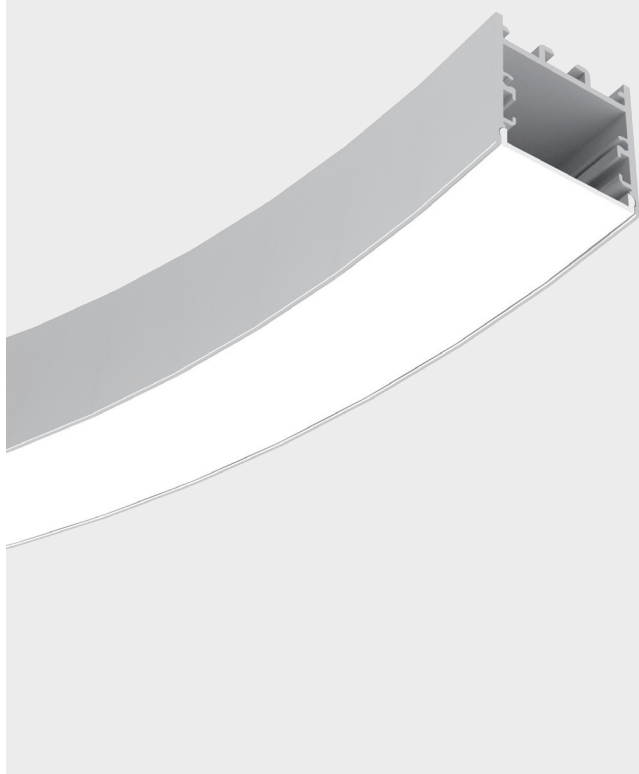

Circular Rings

Smallest: Ø600mm

Largest: no limitation



Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap



Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White





Black



RAL

35mm wide LED Curved Extrusion Profile


LW-CR35

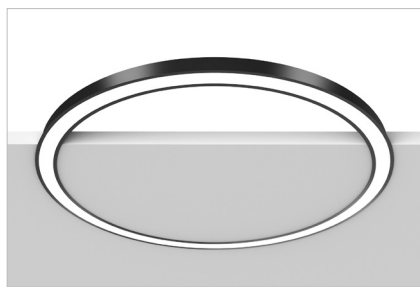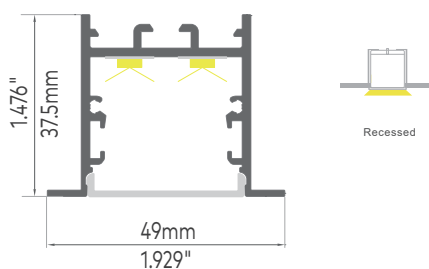

Circular Rings

Smallest: Ø600mm

Largest: no limitation

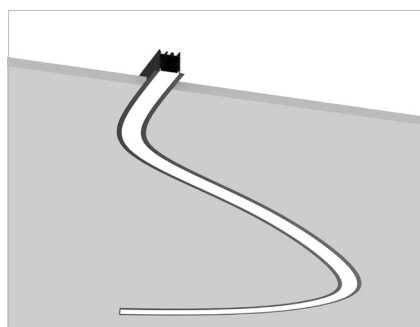

Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

END CAPS



Durable aluminum end cap

RECESSED BRACKET



Depth including bracket: 136mm
Max Spacing 1.5M

Join Section






Customized joiner

Surface Finish



50mm wide LED Curved Extrusion Profile

LW-C50N

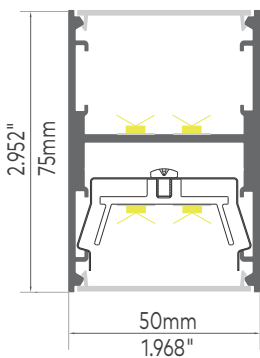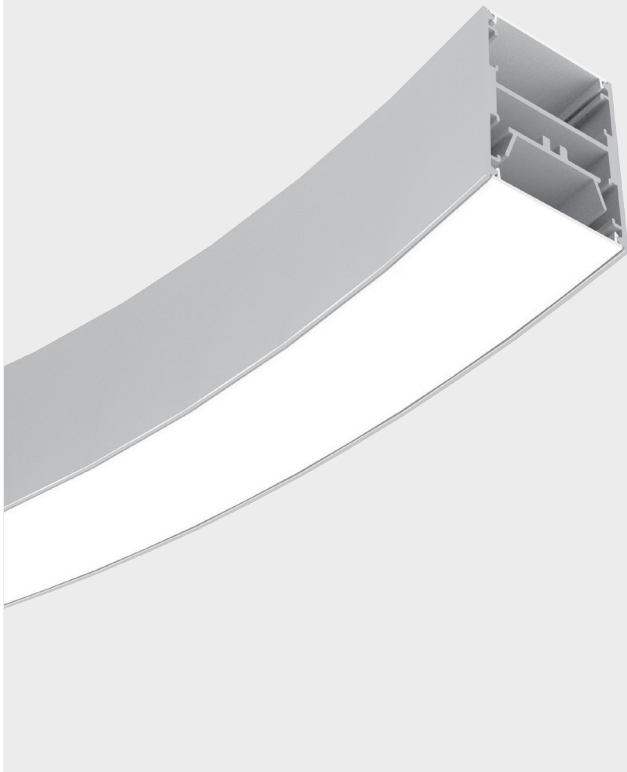

Circular Rings
Smallest: Ø600mm
Largest: no limitation



Customized shape
Min. radius: 300mm
Any design is welcome



Diffuser



Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap

Optional

Durable aluminum end cap

Join Section






Customized joiner

Surface Finish



50mm wide LED Curved Extrusion Profile

LW-C50S

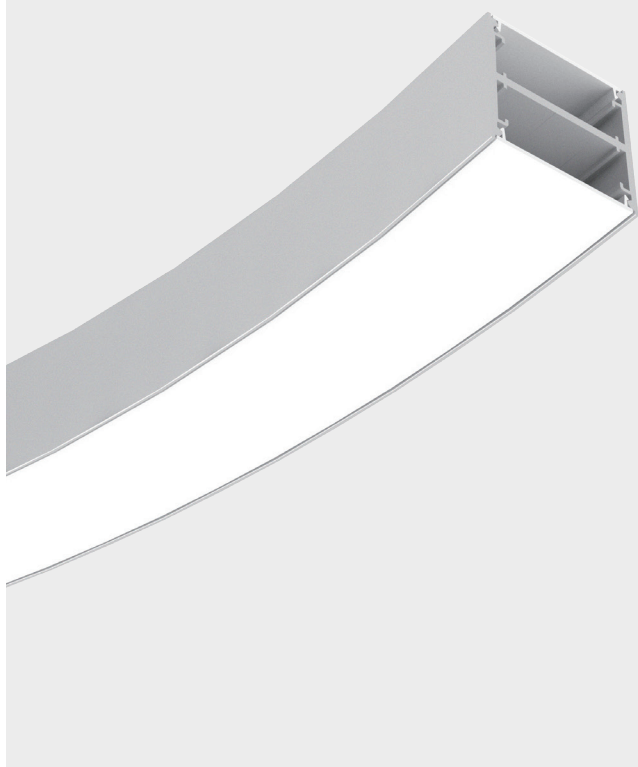

Circular Rings

Smallest: Ø600mm

Largest: no limitation



Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap



Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White





Black




RAL

50mm wide LED Curved Extrusion Profile

LW-CR50

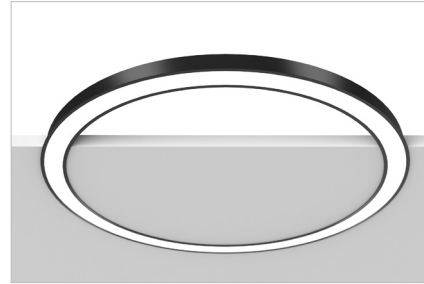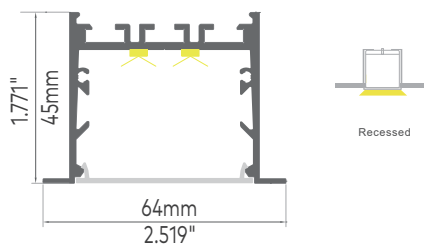

Circular Rings
Smallest: Ø1500mm
Largest: no limitation

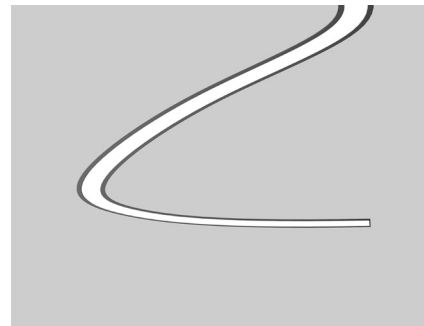

Customized shape
Min. radius: 750mm
Any design is welcome



Diffuser



Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

RECESSED BRACKET



Depth including bracket: 188mm
Max Spacing 1.5M

End Cap

Optional

Durable aluminum end cap

Join Section






Customized joiner

Surface Finish



Side illuminated LED Curved Extrusion Profile


LW-CS35

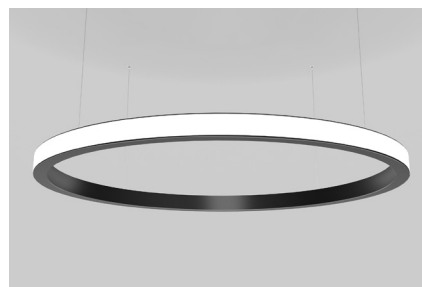

Circular Rings

Smallest: Ø600mm

Largest: no limitation

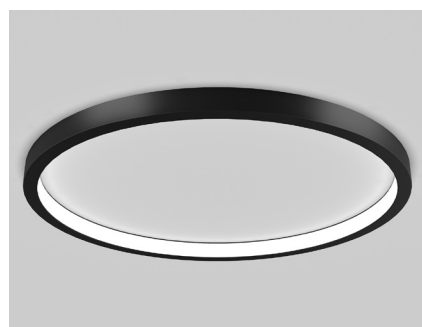

Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser



Curved PMMA new opal diffuser (light trans. 74%)

Standard Flexible Strip LED



LED standard flexible strip 80-100lm/W(after cover)
Constant voltage

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White




Black




RAL

Side illuminated LED Curved Extrusion Profile

LW-CS50

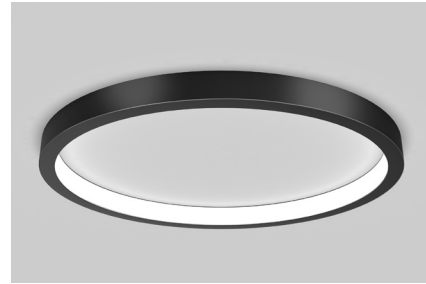

Circular Rings
Smallest: Ø700mm
Largest: no limitation

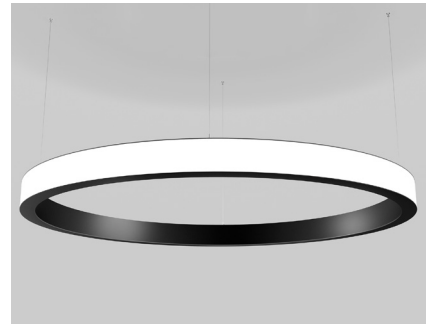

Customized shape
Min. radius: 350mm
Any design is welcome



Diffuser



Curved PMMA new opal diffuser (light trans. 74%)

Standard Flexible Strip LED



LED standard flexible strip 80-100lm/W(after cover)
Constant voltage

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish




White



Black



RAL




Suspended outer



Suspended inner

25mm wide LED Curved Extrusion Profile

LW-C25H



Circular Rings

Smallest: Ø600mm

Largest: no limitation



Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish





White

Black

RAL

80mm wide LED Curved Extrusion Profile


LW-CX80

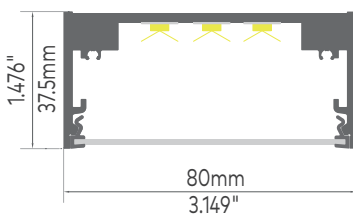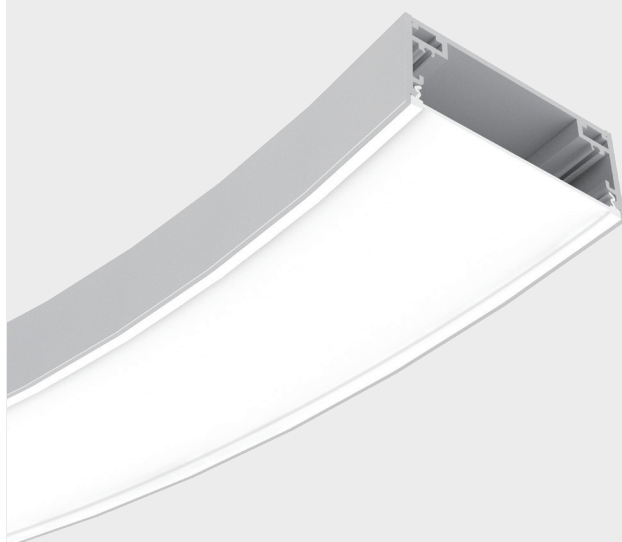

Surface



Suspension

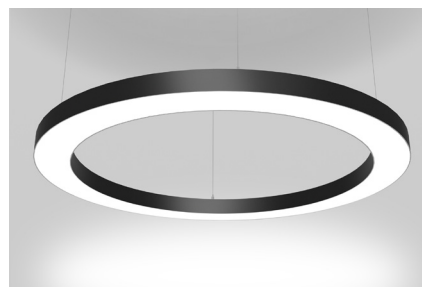

Circular Rings

Smallest: Ø600mm

Largest: no limitation



Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser



Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap



Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White




Black



RAL

100mm wide LED Curved Extrusion Profile


LW-CX100

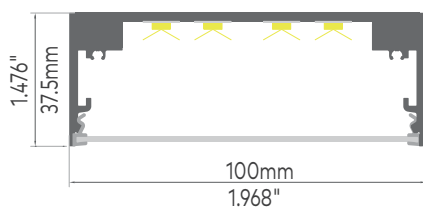

Circular Rings

Smallest: Ø600mm

Largest: no limitation

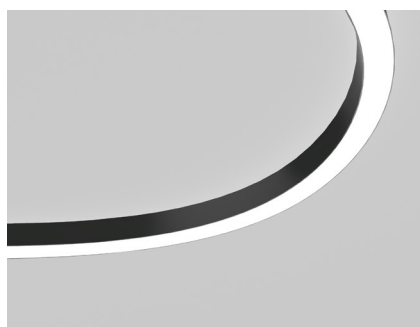

Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

Wire Suspension



Stainless steel cable

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White





Black




RAL

80mm wide LED Curved Extrusion Profile

LW-CRX80

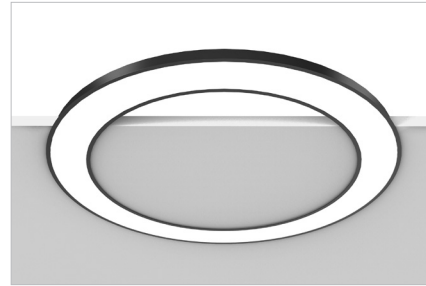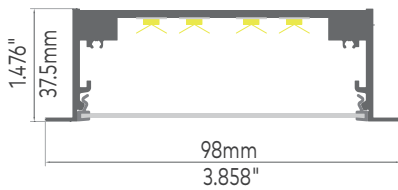

Circular Rings
Smallest: Ø600mm
Largest: no limitation

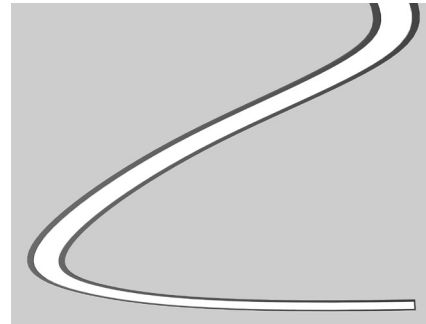

Customized shape
Min. radius: 300mm
Any design is welcome



Diffuser



Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

RECESSED BRACKET



Depth including bracket: 168mm
Max Spacing 1.5M

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White






Black



RAL

100mm wide LED Curved Extrusion Profile


LW-CRX100

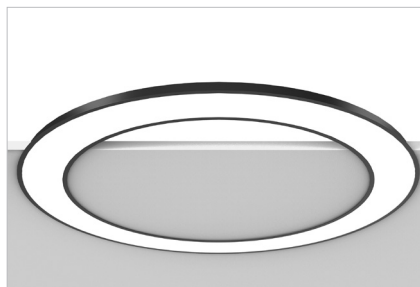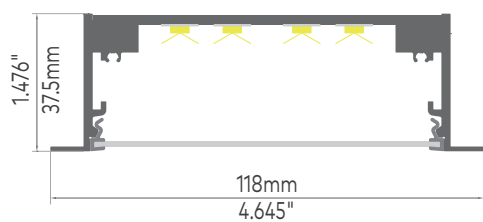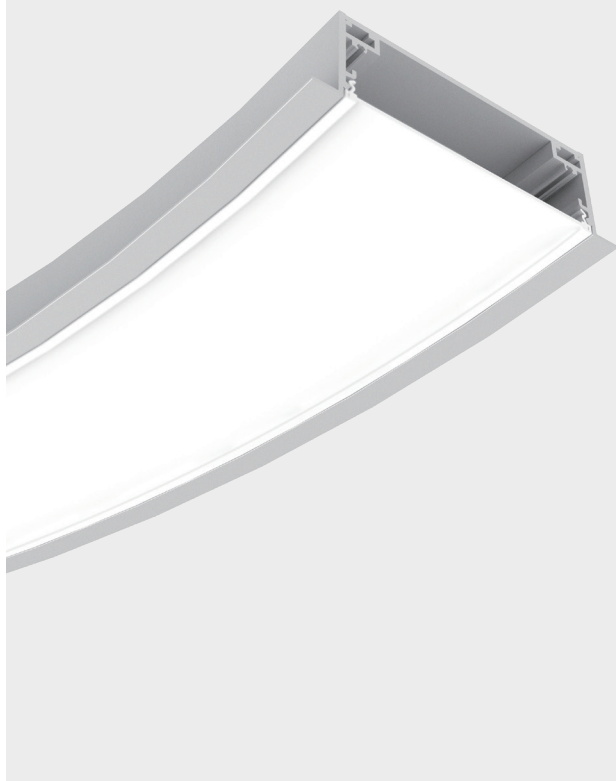

Circular Rings

Smallest: Ø600mm

Largest: no limitation

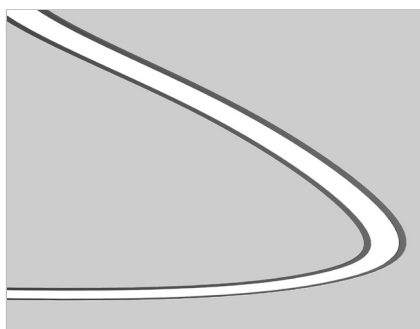

Customized shape

Min. radius: 300mm

Any design is welcome



Diffuser




Curved PMMA new opal diffuser (light trans. 74%)

LED Strip



LED bendable strip **60lm/W** (after cover)
Constant voltage

LED Module



LED module **105lm/W** (after cover)
Constant current

Driver



Option 1 : On / Off Driver
Option 2 : Dali / 0-10v / Triac Dimmable

RECESSED BRACKET



Depth including bracket: 168mm
Max Spacing 1.5M

End Cap

Optional

Durable aluminum end cap

Join Section



Customized joiner

Surface Finish



White









Black



RAL

Projects we have done

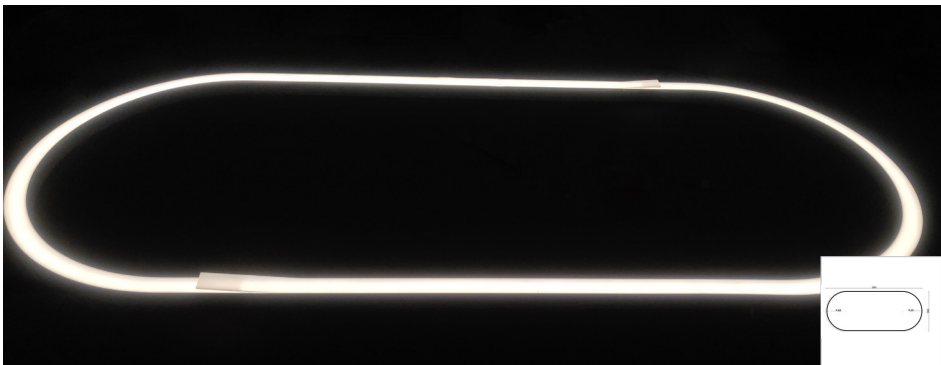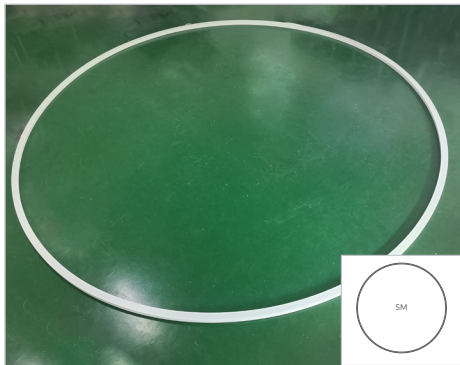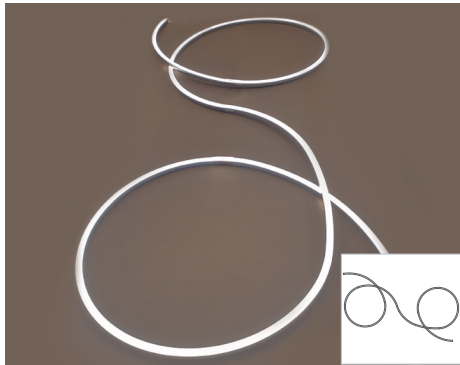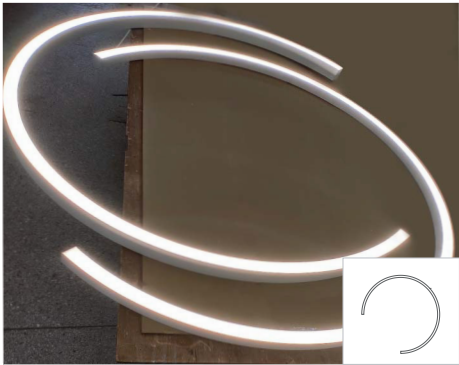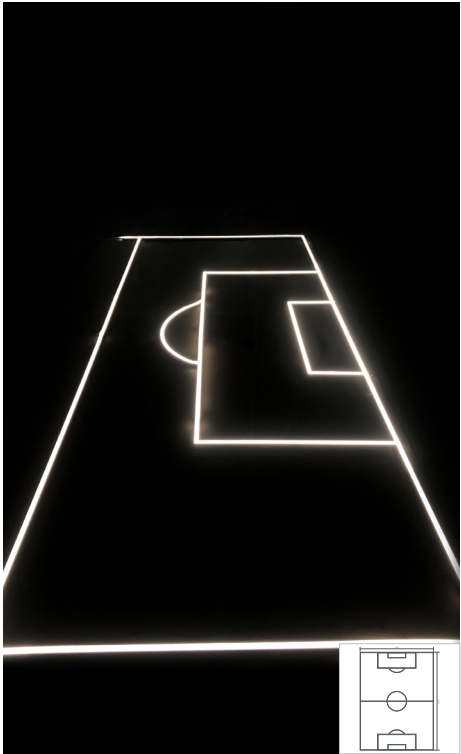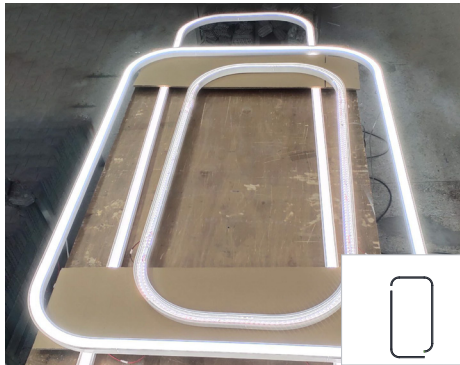

More designs

