



LEDWIDE

Linear and Curved Lighting Specialist

LED PROFILE

2020-2021

PRODUCT
CATALOGUE



Ledwide Company Presentation



Company

Shenzhen Ledwide Lighting Co., Ltd. Established in 2010, as a leading green lighting technology manufacturer, specializes in the manufacturing of innovative, next-generation LED lighting solutions that improve lighting quality, improve efficiency, and enhance the environment through reduced energy consumption. We offer full lighting solutions with over 10 years experience in the lighting field. Now our products are mainly sold to markets such as Europe, Australia & New Zealand, UAE and USA.

Our Main products are Led aluminium profiles, Led Linear light, led strips and led drivers. Unique design, multi-functional, stable quality and fast response to customer requirement is our success to cooperate with long term customers worldwide. Our aluminum profiles are used in 6063 grade with T5 temper, and we have CE and RoHS certificates, and with strict quality control system to ensure the finish, dimension, function, which ensure 5 years+ warranty.

Today, we continuously develop and improve our products and the processes necessary to fulfill today's needs for quality, energy-efficient, eco-friendly lighting solutions.

"Customer first" is our core culture, and we're devoted to providing more and more "custom lighting solutions". Our Core Value is Quality, Innovation, Integrity. It is our great honor to work with you.

Ledwide, always be your trusted partner in LED lighting field. Welcome to visit us.



Reception



Office



Production



Production

Will Wang
Manage Director















Address: 1-2/F, Building A2, Sinopol Ind. Park, First Industrial Zone, BaiHua Community, Guangming District, Shenzhen, P.R.China Postcode: 518107 Contact: 0086 18680360436

Authentication



Index April 2020

●	Company presentation	3
●	Production lines	6
●	Ledwide advantage	8
●	Marketing support	10
●	Black diffuser	11
●	Index of series	12
	● Led profiles Surface	18
	● Led profiles Recessed	38
	● Led profiles Corner	52
	● Led profiles Surface & Suspension	64
	● Led profiles Waterproof	80
	● Led profiles Step and Stair	96
	● Led profiles Round	104
	● Led profiles Wall	112
	● Led profiles Driver Built-in	126
	● Led profiles Trimless -Architectural	140
	● Led profiles Surface & Suspension -Architectural ...	150
	● Led profiles Recessed - Architectural	168
	● Led profiles Plaster in Trimless	182
	● Led profiles Bend & Curved	200
●	Accessories	204
●	Projects	207


Profiles Manufacturing



Aluminum Billet



Aluminum Profile Die




Profile Extrusion



Profile Anodizing



Powder coating


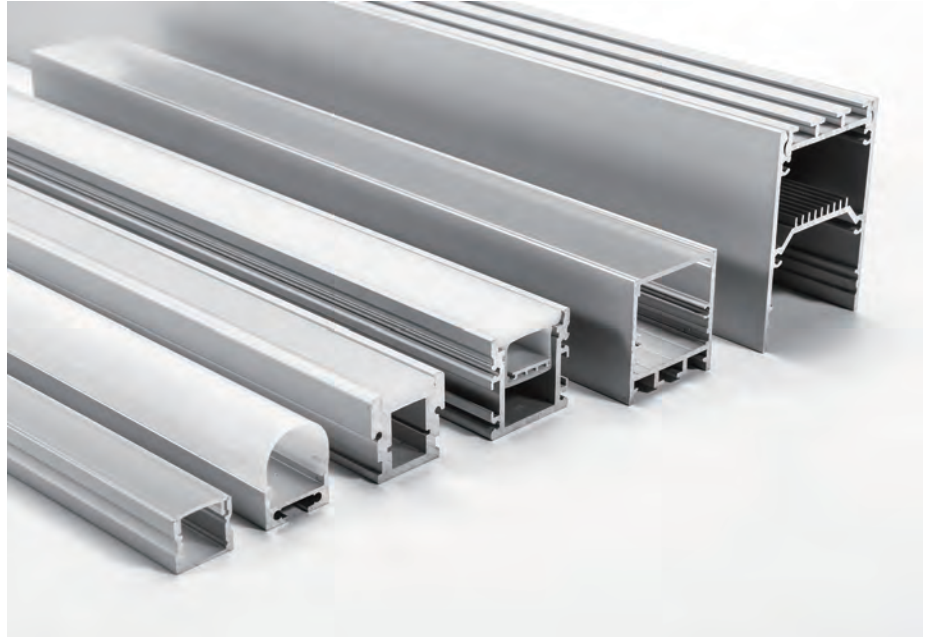


The vast majority of profiles in this catalog have been conceived, designed by Ledwide and manufactured in Foshan city (our joint venture factory). For this we have used an excellent raw material and have been manufactured under quality standards more demanding and rigorous in profile dies, extruding, anodized, polishing and powder coating etc ...

Quality aluminum profile (5 years warranty) with tolerances that are following European Directives: LVD 2014/35/EU, EN 62493:2015; EN 62471:2008. The alloy used is 6063 starting from an aluminum "billet" with a purity between 95-98% and applying a T5 treatment.

The anodized ones we have made from thickness of 1.2mm to 3.5mm for better heat dissipation, and a max. length 6000mm.

Lens / Diffusers Manufacturing

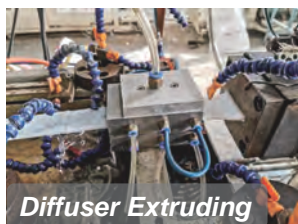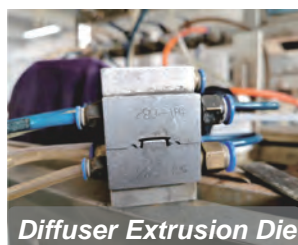

Ledwide using monomer from Germany Brand "Evonik" UV resistant PMMA/Acrylic diffusers (at least 2 years warranty) to suit most of ALU profile extrusions.

PMMA: a material with high optical performances, used in applications involving highest transparency and great diffusing properties.

Using LED CONTROL colors, great performances in LED lighting are ensured, like the invisibility of spots and an excellent transmission-diffusion ration.

PMMA, which is actually a fragile material, but Ledwide has successfully reinforced with HIGH-IMPACT resistant material, more it flexible and can be rolled package for easy delivery.

Also for this material, LEDWIDE offers finishes like Opal, Frosted, Milky, Transparent, colored, striped, microprismatic. PMMA is a UV-resistant material, so no further protections are required.

Thanks to the blend of different materials diffusion effects are obtained, that result in high transparency, completely hiding the LED-Spots.

A great innovation for LED-Lamps satisfying all customer's requests in term of esthetic and functionality, colours, flexibility and innovation.



100% OWN DESIGNED W/ UNIQUE ADVANTAGE



95% EXPORTATION TO 30+ COUNTRIES



5 STAR FEEDBACKS FROM CUSTOMERS



TUV, CE ROHS, IES, TEST REPORT AVAILABLE



CUSTOMIZED SERVICE



3D



Customized RAL colors



LED assembling





Custom cutting




Retail package

**100% OWN DESIGNED W/
UNIQUE ADVANTAGE - P50N**

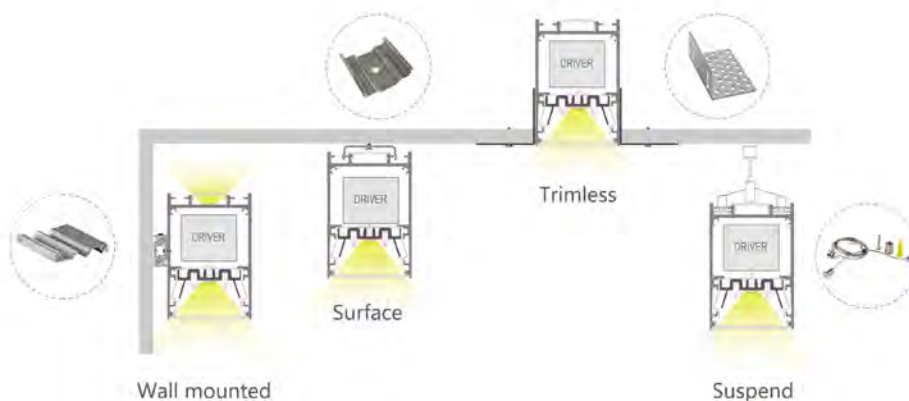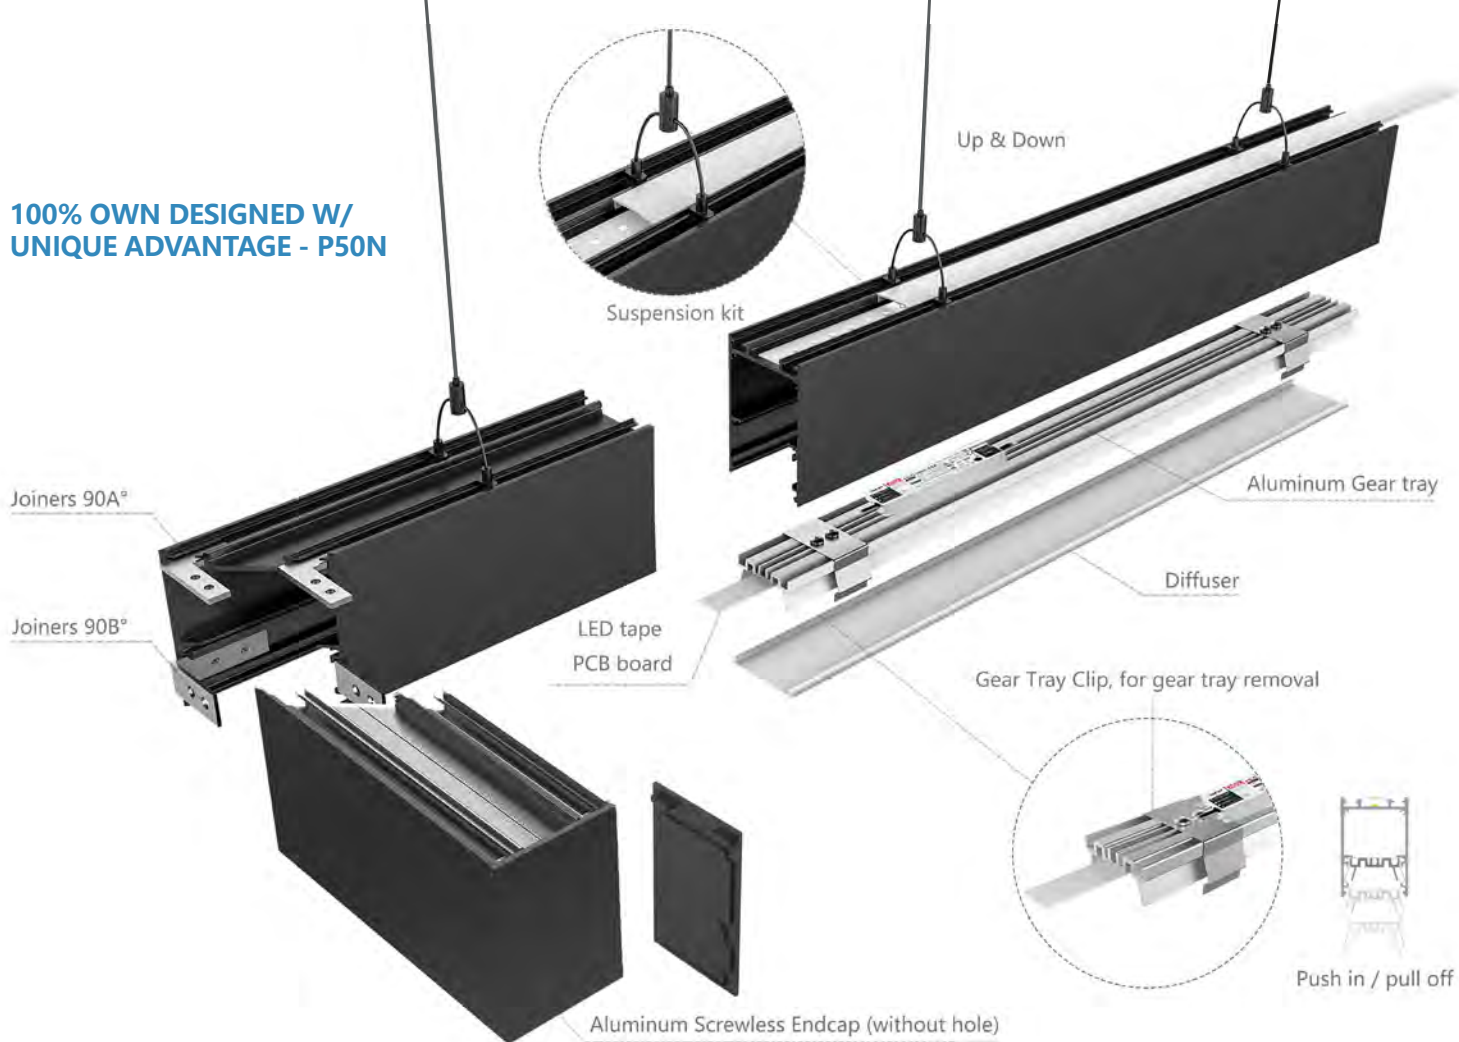


Ledwide is offering our long term customers following services helps your businesses to take competitive advantage over others.

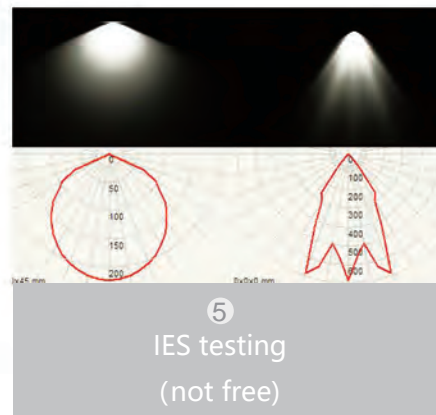

and so on...

We are always growing together with our customers.

LEDWIDE PMMA smoke diffuser with a special compound that allows to transmit light once the led is applied to it. It maintains 95% the tone of the monocolor or RGB led but absorbs a large amount of light (around 70%) so it is mainly intended for decorative and non-technical lighting. Combined with our black Led Profiles, with black covers and black clips, suspension kits, it allows to blend into surfaces dark obtaining spectacular and very elegant results.

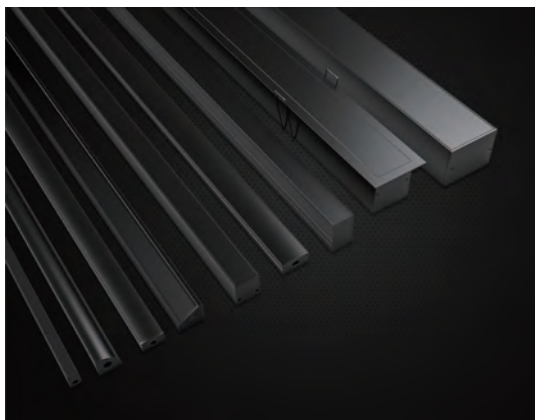

SURFACE

● In Stock ● Few in Stock ● Not stocked and ordered in as requested, MOQ may apply

Model number	AS1	AS2	AS3	AS5	AS9	AS9-6 <small>NEW</small>	AST1
Pages	Page 20	Page 22	Page 24	Page 26	Page 28	Page 30	Page 20
Dimension (W x H)	17.1*8.5mm	17.1*15.2mm	23.5*10.9mm	15.2*6mm	8*9mm	8*6mm	17.1*13.7mm
Max. led power	14.4W/m	19.2W/m	19.2W/m	14.4W/m	9.6W/m	9.6W/m	14.4W/m
Stock	●	●	●	●	●	●	●
Max. length	6000mm	6000mm	6000mm	6000mm	4000mm	4000mm	6000mm

Model number	AL60	MD	AP2	AW7 <small>NEW</small>
Pages	Page 20	Page 32	Page 34	Page 36
Dimension (W x H)	17.1*12.8mm	17.1*17.8mm	16*15.4mm	36.7*25mm
Max. led power	14.4W/m	19.2W/m	19.2W/m	19.2W/m
Stock	●	●	●	●
Max. length	6000mm	4000mm	6000mm	6000mm

RECESSED

Model number	AR1	AR2	AR3	AR5	WR2	AR9
Pages	Page 40	Page 42	Page 44	Page 46	Page 48	Page 50
Dimension (W x H)	23*8.5mm	23*15.2mm	30.6*10.9mm	15.2*6mm	23*19.2mm	14*9mm
Max. led power	14.4W/m	19.2W/m	19.2W/m	14.4W/m	19.2W/m	9.6W/m
Stock	●	●	●	●	●	●
Max. length	6000mm	6000mm	6000mm	4000mm	6000mm	4000mm

CORNER

Model number	AC1	AC2	AC3	AC4	AC5	AV2	AT7N
Pages	Page 54	Page 54	Page 56	Page 58	Page 58	Page 60	Page 62
Dimension (W x H)	16*16mm	16*16mm	18.4*18.4mm	30*30mm	30*30mm	20*16mm	55.5*44.6mm
Max. led power	14.4W/m	14.4W/m	14.4W/m	19.2W/m	19.2W/m	9.6W/m	19.2W/m
Stock	●	●	●	●	●	●	●
Max. length	6000mm	6000mm	6000mm	6000mm	6000mm	6000mm	6000mm




SURFACE & SUSPENSION

● In Stock



● Few in Stock

● Not stocked and ordered in as requested, MOQ may apply






Model number
Pages
Dimension (W x H)
Max. led power
Stock
Max. length

				
US20	U20	AT4	AT5	AT6
Page 66	Page 68	Page 70	Page 70	Page 70
20*20mm	20*40mm	19.5*19.2mm	19.5*19.2mm	19.5*16.3mm
19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
●	●	●	●	●
6000mm	6000mm	6000mm	6000mm	6000mm


Model number
Pages
Dimension (W x H)
Max. led power
Stock
Max. length

				
AT11	AT5H	AT15	AT15-30	AT15-60
Page 72	Page 72	Page 74	Page 74	Page 74
19.5*12.5mm	19.5*28.4mm	25*29.7mm	25*29.7mm	25*29.7mm
19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
●	●	●	●	●
6000mm	6000mm	6000mm	6000mm	6000mm

Model number
Pages
Dimension (W x H)
Max. led power
Stock
Max. length








				
AT16-4	AT16-5	AT16-5H	AT16-11	AT16-30
Page 76	Page 76	Page 76	Page 78	Page 78
19.5*26.3mm	19.5*25.9mm	19.5*35.4mm	19.5*17.4mm	19.5*17.4mm
19.2W/m	19.2W/m	19.2W/m	19.2W/m	28.8W/m
●	●	●	●	●
6000mm	6000mm	6000mm	6000mm	6000mm

Model number
Pages
Dimension (W x H)
Max. led power
Stock
Max. length







AT16-60
Page 78
19.5*17.4mm
28.8W/m
●
6000mm

WATERPROOF

● In Stock ● Few in Stock ● Not stocked and ordered in as requested, MOQ may apply

							
Model number	WP2	WP3 NEW	WP3-30 NEW	WP3-60 NEW	AA	AB	AF1
Pages	Page 82	Page 84	Page 84	Page 84	Page 86	Page 88	Page 90
Dimension (W x H)	17.1*17mm	28*33mm	28*33mm	28*33mm	19.1*8mm	28.6*11.2mm	26*25mm
Max. led power	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m	14.4W/m	19.2W/m
Stock	●	●	●	●	●	●	●
Max. length	4000mm	4000mm	4000mm	4000mm	4000mm	4000mm	6000mm







STEP AND STAIR

					
Model number	ST1	ST2 NEW	STR3	AF2	AF3
Pages	Page 98	Page 100	Page 102	Page 92	Page 94
Dimension (W x H)	67.5*27.8mm	60*25.7mm	82.4*37.9mm	30.5*30mm	69*65mm
Max. led power	19.2W/m	9.6W/m	19.2W/m	19.2W/m	19.2W/m
Stock	●	●	●	●	●
Max. length	6000mm	6000mm	6000mm	2500mm	2500mm

ROUND

			
Model number	R30	R34	R60
Pages	Page 106	Page 108	Page 110
Dimension (W x H)	φ30	φ34	φ60
Max. led power	28.8W/m	28.8W/m	28.8W/m
Stock	●	●	●
Max. length	4000mm	5000mm	6000mm

WALL

						
Model number	AW 1	AW 2	AW 4-1	AW 8	AW 5-1	AW 35
Pages	Page 114	Page 116	Page 118	Page 120	Page 122	Page 124
Dimension (W x H)	25.4*70mm	27.7*70mm	23.6*83mm	17.5*40.7mm	35*83mm	42*35mm
Max. led power	19.2W/m	14.4W/m	14.4W/m	19.2W/m	19.2W/m	38.4W/m
Stock	●	●	●	●	●	●
Max. length	6000mm	6000mm	4000mm	4000mm	4000mm	6000mm


DRIVER BUILT-IN PROFILE

● In Stock

● Few in Stock


● Not stocked and ordered in as requested, MOQ may apply

Remark : 3 different installation ways as P35

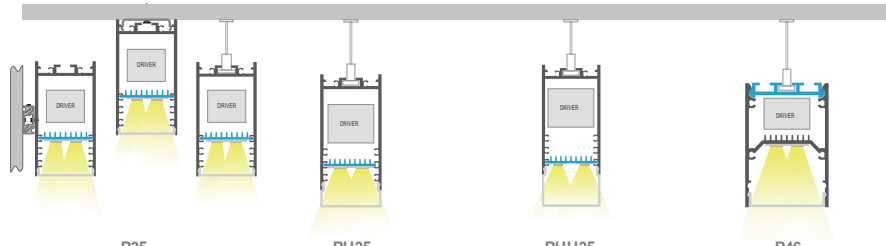


Model number	P35	PU35	PUH35	P46
Pages	Page 128	Page 128	Page 128	Page 130
Dimension (W x H)	35*68mm	35*78mm	35*88mm	46*68mm
Max. led power	38.4W/m	38.4W/m	38.4W/m	38.4W/m
Stock	●	●	●	●
Max. length	6000mm	6000mm	6000mm	6000mm

Remark : 3 different installation ways as P35

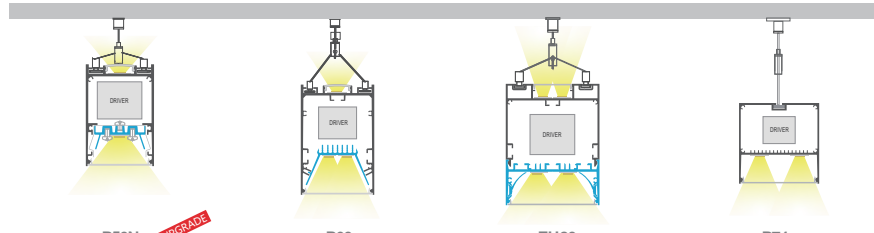


Model number	P50N UPGRADE	P60	EH80	P74
Pages	Page 132	Page 134	Page 136	Page 138
Dimension (W x H)	50*75mm	60*90mm	80*100mm	74*77mm
Max. led power	57.6W/m	57.6W/m	57.6W/m	57.6W/m
Stock	●	●	●	●
Max. length	6000mm	6000mm	6000mm	6000mm


TRIMLESS-ARCHITECTURAL

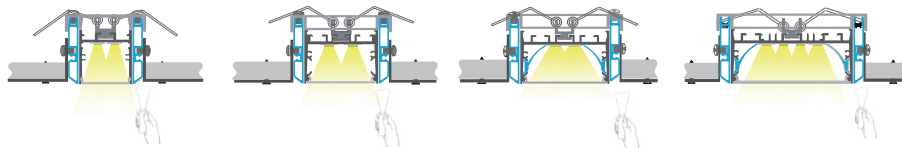


Model number	TR35	TR50	TR60	TR80
Pages	Page 142	Page 144	Page 146	Page 148
Dimension (W x H)	54*48mm	67*48mm	76*48mm	96*48mm
Max. led power	28.8W/m	38.4W/m	57.6W/m	57.6W/m
Stock	●	●	●	●
Max. length	6000mm	6000mm	6000mm	6000mm

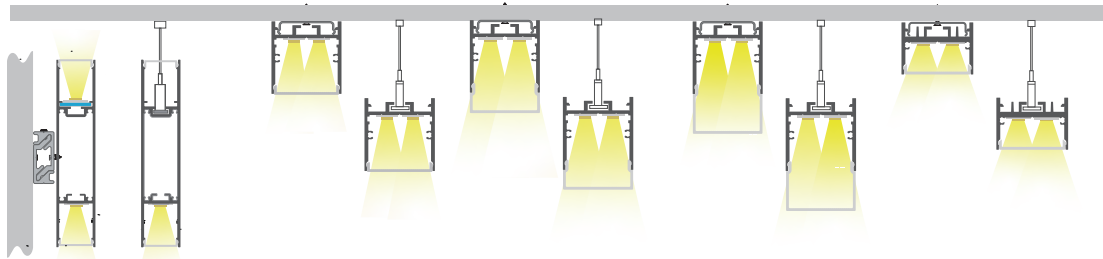

Model number	P24	WN35	WU35	WUH35	WN35-25
Pages	Page 152	Page 154	Page 154	Page 154	Page 156
Dimension (W x H)	25*120mm	35*37.5mm	35*47.5mm	35*57.5mm	35*25.4mm
Max. led power	38.4W/m	38.4W/m	38.4W/m	38.4W/m	38.4W/m
Stock	●	●	●	●	●
Max. length	4000mm	6000mm	6000mm	6000mm	6000mm

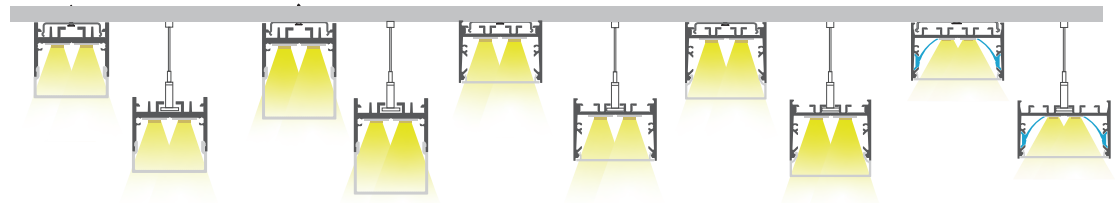


Model number	WU35-25	WUH35-25	E50	EU50	E60
Pages	Page 156	Page 156	Page 158	Page 158	Page 160
Dimension (W x H)	35*35.4mm	35*45.4mm	50*37.5mm	50*47.5mm	60*37.5mm
Max. led power	38.4W/m	38.4W/m	38.4W/m	57.6W/m	57.6W/m
Stock	●	●	●	●	●
Max. length	6000mm	6000mm	6000mm	6000mm	6000mm

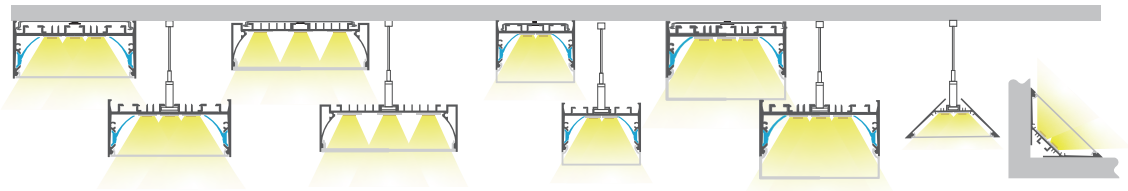

Model number	E80	E100	EU60	EU80	W91
Pages	Page 162	Page 164	Page 160	Page 162	Page 166
Dimension (W x H)	80*37.5mm	102*31mm	60*47.5mm	80*52.5mm	90*37.5mm
Max. led power	57.6W/m	57.6W/m	57.6W/m	57.6W/m	57.6W/m
Stock	●	●	●	●	●
Max. length	6000mm	4000mm	6000mm	6000mm	6000mm


RECESSED-ARCHITECTURAL

● In Stock ● Few in Stock ● Not stocked and ordered in as requested, MOQ may apply




Model number	WN31	ER50	ER50-2 ^{NEW}	ER60	ER7635	AW 1-50 ^{NEW}
Pages	Page 170	Page 172	Page 176	Page 174	Page 178	Page 180
Dimension (W x H)	49*37.5mm	63.9*45mm	80*25mm	73.9*45mm	91*35mm	19.5*50mm
Max. led power	38.4W/m	57.6W/m	38.4W/m	57.6W/m	57.6W/m	19.2W/m
Stock	●	●	●	●	●	●
Max. length	6000mm	5000mm	6000mm	5000mm	4000mm	6000mm

PLASTER IN TRIMLESS

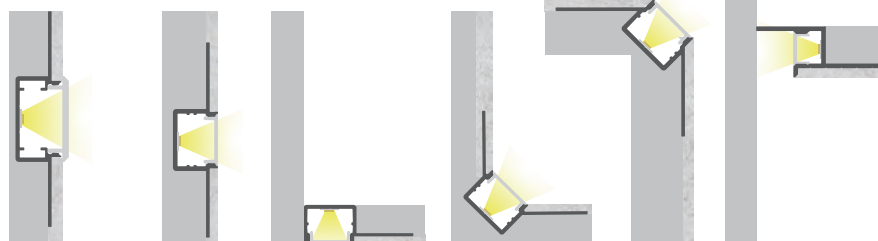


Model number	CT4N	CT5	CT5S	CT6	CT7	CT8
Pages	Page 184	Page 186	Page 188	Page 190	Page 192	Page 194
Dimension (W x H)	66.4*16.4mm	59*13.6mm	38.8*13.6mm	49.8*26.1mm	55.6*23.7mm	42.5*28.5mm
Max. led power	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m	19.2W/m
Stock	●	●	●	●	●	●
Max. length	2500mm	2500mm	2500mm	2500mm	2500mm	2500mm

BEND & CURVED



Model number	B1
Pages	Page 202
Dimension (W x H)	19.4*6.5mm
Max. led power	14.4W/m
Stock	●
Max. length	3000mm




CT9 ^{NEW}	CTW1 ^{NEW}
Page 196	Page 198
28*9mm	86.5*16mm
9.6W/m	14.4W/m
●	●
2500mm	6000mm

Catalogue


1 SURFACE

- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS


- 2 RECESSED
- 4 SURFACE & SUSPENSION
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL
- 14 BEND & CURVED




LW-AS1
Page 20




LW-AS2
Page 22




LW-AS3
Page 24




LW-AS5
Page 26




LW-AS9
Page 28




LW-AS9-6
Page 30




LW-AST1
Page 20




LW-AL60
Page 20




LW-MD
Page 32




LW-AP2
Page 34




LW-AW7
Page 36




LW-AS1



LW-AST1




LW-AL60




Aluminium Profile



AS1



AST1



AL60

Specification:

Suitable for PCB:	12mm
Max. LED power:	14.4w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 17.1mm, (H) 8.5mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: AS1-O (Opal, light trans. >52%)
 Code: AS1-M (Milky, light trans. >65%)
 Code: AS1-F (Frost, light trans. >81%)
 Code: AS1-C (Clear, light trans. >95%)

PC Diffuser

Code: AS1-O (Opal, light trans. >50%)

PMMA Diffuser

Code: AST1-M (Milky, light trans. >65%)

PC Diffuser

Code: AL60-C (Clear, light trans. >94%)


Black Diffuser


Code: AS1-B (Black, light trans. > 22%)
 MOQ: 200M



Installing accessories:

	Plastic Endcap (with/without hole)	Code: AS1-Cap Code: AS1-Cap-H		Metal Clip Code: AS1-Clip-M
	Plastic Endcap (with/without hole)	Code: AL60-Cap Code: AL60-Cap-H	 (Optional)	Plastic Clip Code: AS1-Clip-P
	Plastic Endcap (with/without hole)	Code: AST1-Cap Code: AST1-CapH	 (Optional)	Adjustable Clip (0-222° rotation) Code: AS1-Clip-A

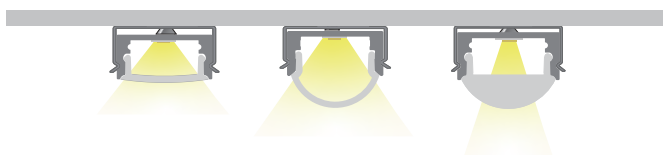



LW-AS2



Specification:

Suitable for PCB:	12mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 17.1mm, (H) 15.2mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	

Aluminium Profile



AS2



PMMA Diffuser

- Code: AS2-O (Opal, light trans. >52%)
- Code: AS2-M (Milky, light trans. >65%)
- Code: AS2-F (Frost, light trans. >81%)
- Code: AS2-C (Clear, light trans. >95%)

PC Diffuser

- Code: AS1-O (Opal, light trans. >50%)



Black Diffuser

- Code: AS2-B (Black, light trans. > 22%)
- MOQ: 200M

Installing accessories:



Plastic Endcap
(with/without hole) Code: AS2-Cap
Code: AS2-Cap-H




Metal Clip
Code: AS1-Clip-M




Adjustable Clip
(0-222° rotation) Code: AS1-Clip-A



Plastic Clip
Code: AS1-Clip-P

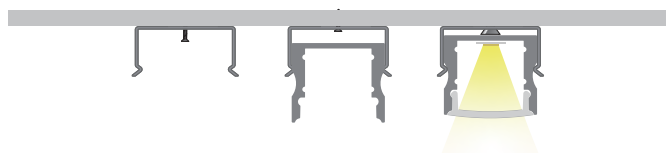




LW-AS3



110°

Aluminium Profile

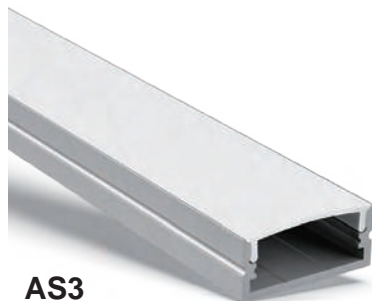

AS3

Specification:

Suitable for PCB :	20mm
Max. LED power:	19.2w/m
Installation:	Surface
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 23.5mm, (H) 10.9mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	



PMMA Diffuser

Code: AS3-O (Opal, light trans. >52%)
 Code: AS3-F (Frost, light trans. >81%)
 Code: AS3-C (Clear, light trans. >95%)



Black Diffuser

Code: AS3-B (Black, light trans. > 22%)
 MOQ: 200M

Installing accessories:



Plastic Endcap
(with/without hole) Code: AS3-Cap
Code: AS3-Cap-H



Metal Clip
Code: AS3-Clip-M




(Optional)


Adjustable Clip
(0-222° rotation) Code: AS3-Clip-A



(Optional)

Plastic Clip
Code: AS3-Clip-P

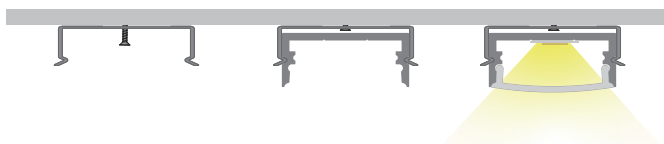




LW-AS5



Aluminium Profile



AS5

Specification:

Suitable for PCB: 10mm

Max. LED power: 14.4w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 15.2mm, (H) 6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: AS5-O (Opal, light trans. >50%)

Code: AS5-F (Frost, light trans. >65%)

Installing accessories:



Plastic Endcap
(with/without hole) Code: AS5-Cap
Code: AS5-Cap-H




Metal Clip
Code: AS5-Clip-M




(Optional)

Adjustable Clip
(0-222° rotation) Code: AS5-Clip-A



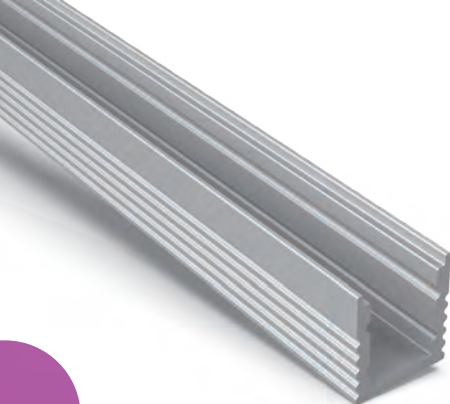

Aluminium Profile



LW-AS9



Specification:

Suitable for PCB: 5mm

Max. LED power: 9.6w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser


Length: 2000mm or 2500mm continuous **

Size: Profile (W) 8mm, (H) 9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



AS9



PC Diffuser

Code: AS9-O (Opal, light trans. >50%)

Code: AS9-C (Clear, light trans. >94%)



Black Diffuser

Code: AS9-B (Black, light trans. >22%)

MOQ: 200M

For 2110 120led 4mm 7.2W strip only.


Installing accessories:




Plastic Endcap
(with/without hole) Code: AS9-Cap
Code: AS9-Cap-H



Metal Clip
Code: AS9-Clip-M

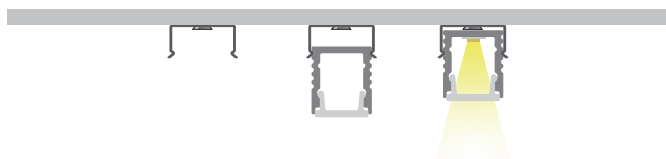


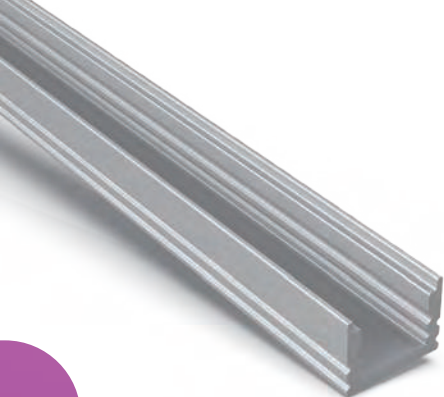

Aluminium Profile



AS9-6



LW-AS9-6



Specification:

Suitable for PCB: 5mm

Max. LED power: 9.6w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 8mm, (H) 6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

Code: AS9-6-O (Opal, light trans. >50%)

Code: AS9-6-C (Clear, light trans. >94%)

For 2110 120led 4mm 7.2W strip only.

Installing accessories:



Plastic Endcap Code: AS9-6-Cap
(with/without hole) Code: AS9-6-Cap-H




Only 6mm height, SMALLEST in Ledwide profiles range



Aluminium Profile



MD

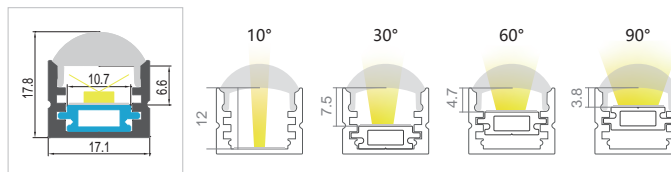

LW-MD

Specification:

Suitable for PCB: 10mm

Max. LED power: 19.2w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.1mm, (H) 17.8mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

Code: MD-C (Clear, light trans. >94%)

Installing accessories:



Plastic Endcap
(with/without hole) Code: MD-Cap
Code: MD-Cap-H



Metal Clip
Code: AS1-Clip-M





(Optional)

Adjustable Clip
(0-222° rotation) Code: AS1-Clip-A



(Optional)

Plastic Clip
Code: AS1-Clip-P

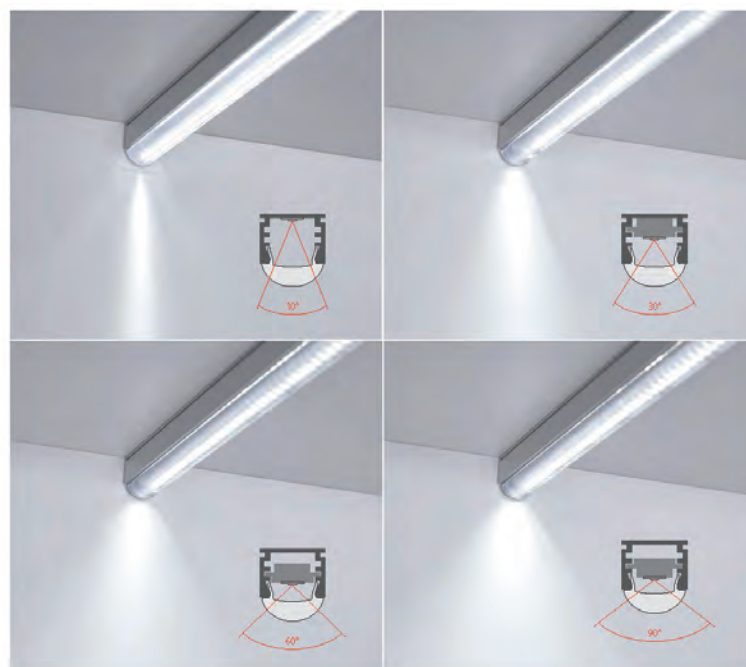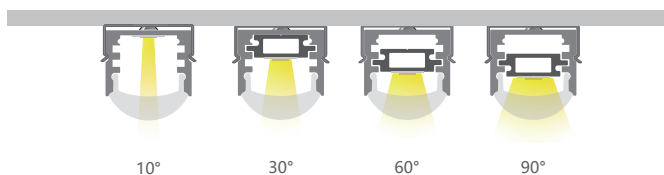




Aluminium Profile



AP2



LW-AP2



120°

Specification:

Suitable for PCB: 12mm

Max. LED power: 19.2w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 16mm, (H) 15.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: AP2-O (Opal, light trans. >50%)

Installing accessories:



Aluminium Endcap Code: AP2-Cap
(with/without hole) Code: AP2-Cap-H





Metal Clip
Code: AP2-Clip-M



(Optional)

Adjustable Clip
(0-222° rotation) Code: AP2-Clip-A

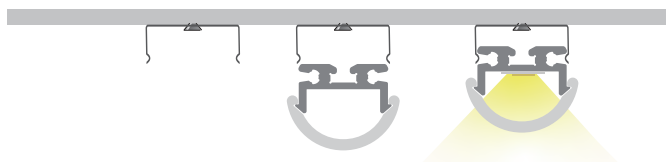




LW-AW7



Aluminium Profile



AW7

Specification:

Suitable for PCB: 15mm

Max. LED power: 19.2w/m

Installation: Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White*

Diffuser: PPMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous**

Size: Profile (W) 36.7mm, (H) 25mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: AW7-O (Opal, light trans. >52%)

Code: AW7-M (Milky, light trans. >65%)

Code: AW7-F (Frost, light trans. >81%)

Code: AW7-C (Clear, light trans. >95%)

PC Diffuser

Code: AW7-O (Opal, light trans. >50%)



Installing accessories:




Aluminium CNC Endcap
(without hole)

Code: AW7-Cap-R
Code: AW7-Cap-L



Ceiling Wash



Floor Wash



Wall Wash




Catalogue


- 1 SURFACE
- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS

2 RECESSED


- 4 SURFACE & SUSPENSION
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL
- 14 BEND & CURVED




LW-AR1
Page 40




LW-AR2
Page 42




LW-AR3
Page 44




LW-AR5
Page 46



LW-WR2
Page 48



LW-AR9
Page 50



LW-AR1



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **


Size: Profile (W) 23mm, (H) 6.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



AR1



PMMA Diffuser

Code: AR1-O (Opal, light trans. >52%)

Code: AR1-M (Milky, light trans. >65%)

Code: AR1-F (Frost, light trans. >81%)

Code: AR1-C (Clear, light trans. >95%)

PC Diffuser

Code: AR1-O (Opal, light trans. >50%)

Installing accessories:



Plastic Endcap
(with/without hole) Code: AR1-Cap
Code: AR1-Cap-H



Metal Clip
Code: AS1-Clip-M






Aluminium Profile



AR2



LW-AR2



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23mm, (H) 15.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: AR2-O (Opal, light trans. >52%)

Code: AR2-M (Milky, light trans. >65%)

Code: AR2-F (Frost, light trans. >81%)

Code: AR2-C (Clear, light trans. >95%)

PC Diffuser

Code: AR2-O (Opal, light trans. >50%)



Installing accessories:




Plastic Endcap
(with/without hole) Code: AR2-Cap
Code: AR2-Cap-H



Metal Clip
Code: AS1-Clip-M




Plastic Clip
Code: AS1-Clip-P

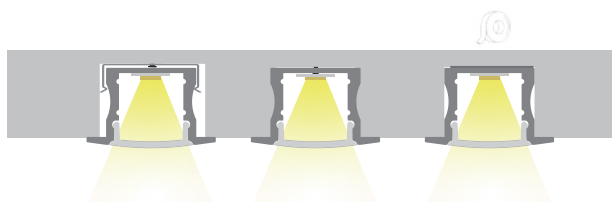




Aluminium Profile

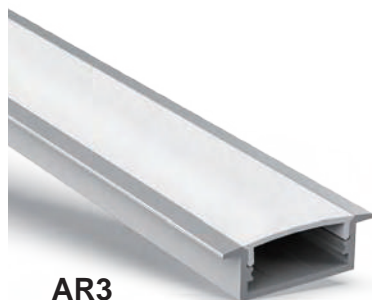

AR3



LW-AR3



110°

Specification:

Suitable for PCB 20mm

Max. LED power: 19.2w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30.6mm, (H) 10.9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AR3-O (Opal, light trans. >52%)

Code: AR3-F (Frost, light trans. >81%)

Code: AR3-C (Clear, light trans. >95%)


Installing accessories:



Plastic Endcap
(with/without hole) Code: AR3-Cap
Code: AR3-Cap-H




Metal Clip
Code: AS3-Clip-M

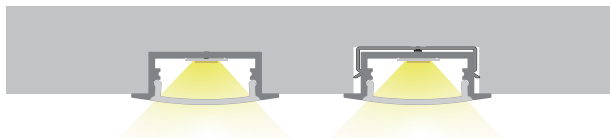




Aluminium Profile

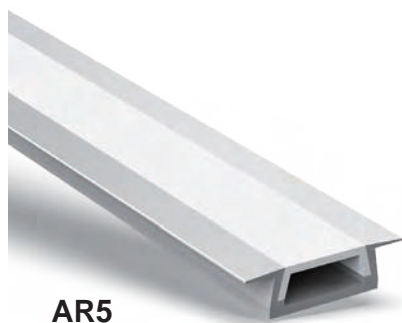

AR5



LW-AR5



Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 15.2mm, (H) 6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

Code: AR5-O (Opal, light trans. >50%)

Code: AR5-F (Frost, light trans. >65%)


Installing accessories:




Plastic Endcap
(with/without hole) Code: AR5-Cap
Code: AR5-Cap-H



Metal Clip
Code: AS5-Clip-M

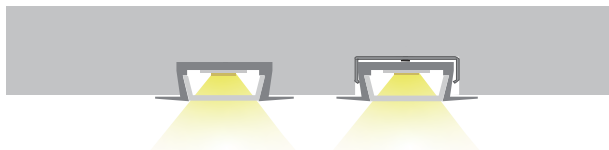



LW-WR2



Aluminium Profile



WR2

Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23mm, (H) 19.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: WR2-O (Opal, light trans. >52%)

Code: WR2-M (Milky, light trans. >65%)

Code: WR2-F (Frost, light trans. >81%)

Code: WR2-C (Clear, light trans. >95%)

PC Diffuser

Code: WR2-O (Opal, light trans. >50%)




Installing accessories:





Plastic Endcap
(with/without hole) Code: AR2-Cap
Code: AR2-Cap-H



Spring Clip
Code: SC-AW6



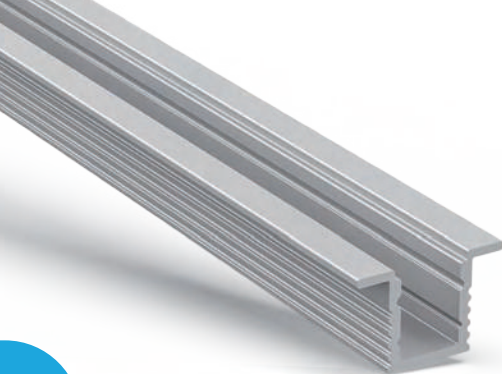

LW-AR9



Aluminium Profile



AR9



For 2110 120led 4mm 7.2W strip only.

Specification:

Suitable for PCB 5mm

Max. LED power: 9.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 14mm, (H) 9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

Code: AR9-O (Opal, light trans. >50%)

Code: AR9-C (Clear, light trans. >94%)


Installing accessories:



Plastic Endcap
(with/without hole) Code: AR9-Cap
Code: AR9-Cap-H




Metal Clip
Code: AS9-Clip-M

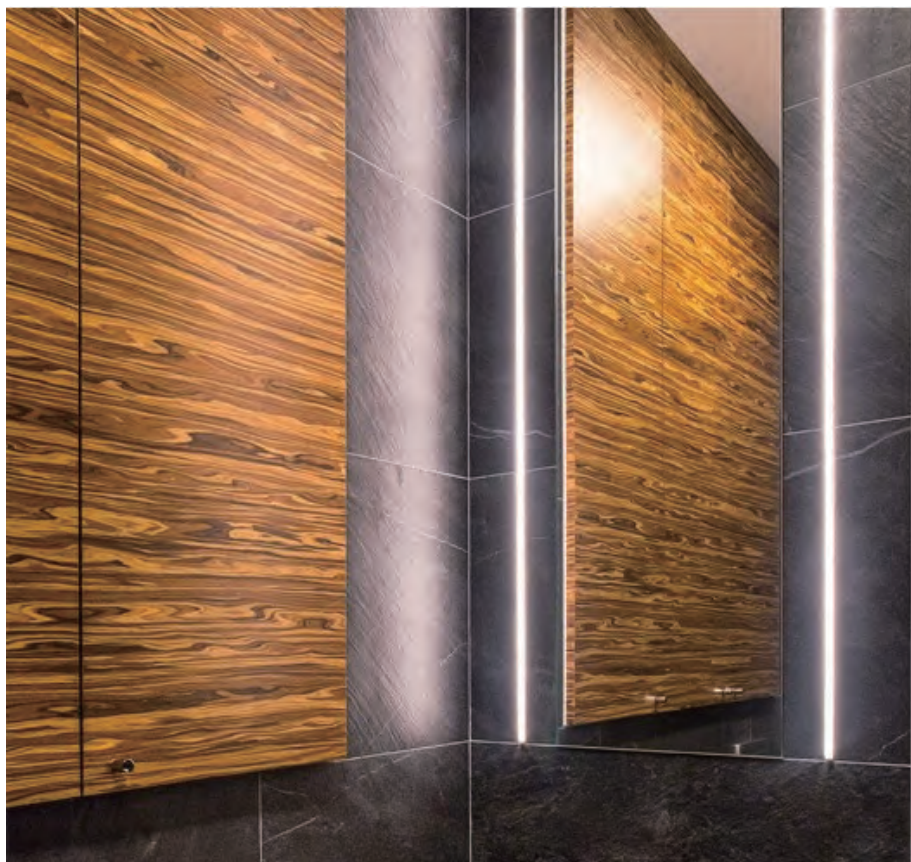


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




LW-AC1
Page 54




LW-AC2
Page 54




LW-AC3
Page 56




LW-AC4
Page 58



LW-AC5
Page 58




LW-AV2
Page 60



LW-AT7N
Page 62




Aluminium Profile




AC1



AC2



LW-AC1



LW-AC2



Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 16mm, (H) 16mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AC1-O (Opal, light trans. >52%)

Code: AC1-F (Frost, light trans. >81%)



PMMA Diffuser

Code: AC2-O (Opal, light trans. >42%)

Code: AC2-M (Milky, light trans. >49%)

Code: AC2-F (Frost, light trans. >54%)

Code: AC2-C (Clear, light trans. >95%)

PC Diffuser

Code: AC2-O (Opal, light trans. >50%)



Black Diffuser

Code: AC2-B (Black, light trans. > 22%)

MOQ: 200M

Installing accessories:



Plastic Endcap
(with/without hole) Code: AC1-Cap
Code: AC1-Cap-H



Metal Clip
Code: AC1-Clip-M





Plastic Endcap
(with/without hole) Code: AC2-Cap
Code: AC2-Cap-H




Plastic Clip
Code: AC1-Clip-P



Adjustable Clip
(0-222° rotation) Code: AC1-Clip-A





LW-AC3



Aluminium Profile



AC3

Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 18.4mm, (H) 18.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: AC3-O (Opal, light trans. >52%)

Code: AC3-M (Milky, light trans. >65%)

Code: AC3-F (Frost, light trans. >81%)

Code: AC3-C (Clear, light trans. >95%)

PC Diffuser

Code: AC3-O (Opal, light trans. >50%)

Black Diffuser

Code: AS1-B (Black, light trans. >22%)

MOQ: 200M



Installing accessories:



Plastic Endcap
(with/without hole) Code: AC3-Cap
Code: AC3-Cap-H





Metal Clip
Code: AC3-Clip-M



Adjustable Clip
(0-222° rotation) Code: AC3-Clip-A




Plastic Clip
Code: AC3-Clip-P

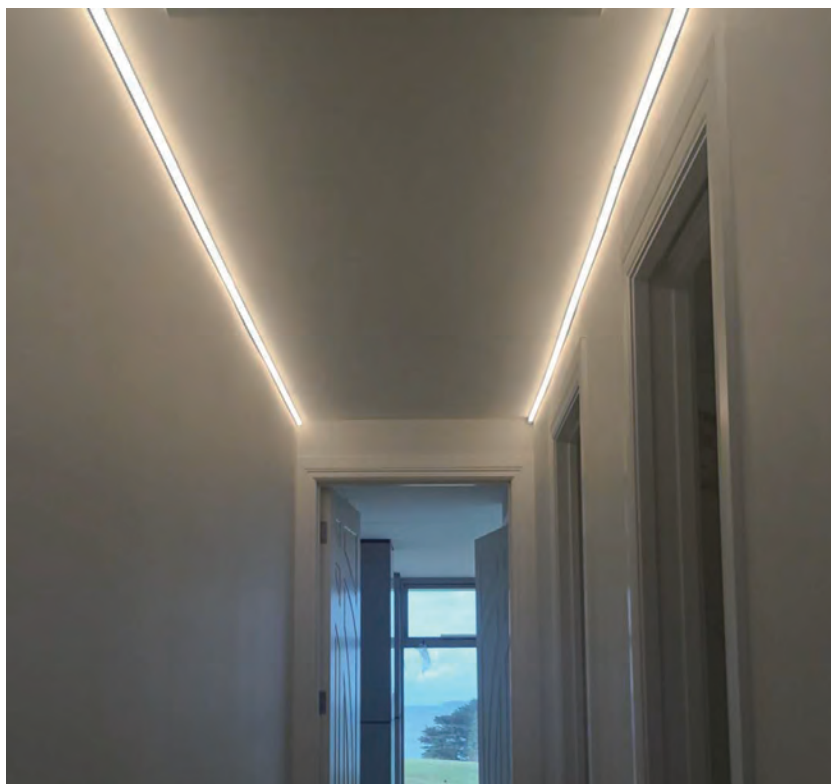





Aluminium Profile




AC4



AC5



LW-AC4



LW-AC5



Specification:

Suitable for PCB 20mm

Max. LED power: 19.2w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30mm, (H) 30mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: AC4-O (Opal, light trans. >50%)

Code: AC4-C (Clear, light trans. >94%)



PC Diffuser

Code: AC5-O (Opal, light trans. >50%)

Code: AC5-C (Clear, light trans. >94%)

Installing accessories:



Plastic Endcap
(with/without hole) Code: AC4-Cap
Code: AC4-Cap-H



Metal Clip
Code: AC4-Clip-M





Plastic Endcap
(with/without hole) Code: AC5-Cap
Code: AC5-Cap-H



Plastic Clip
Code: AC4-Clip-P



Adjustable Clip
(0-222° rotation) Code: AC4-Clip-A

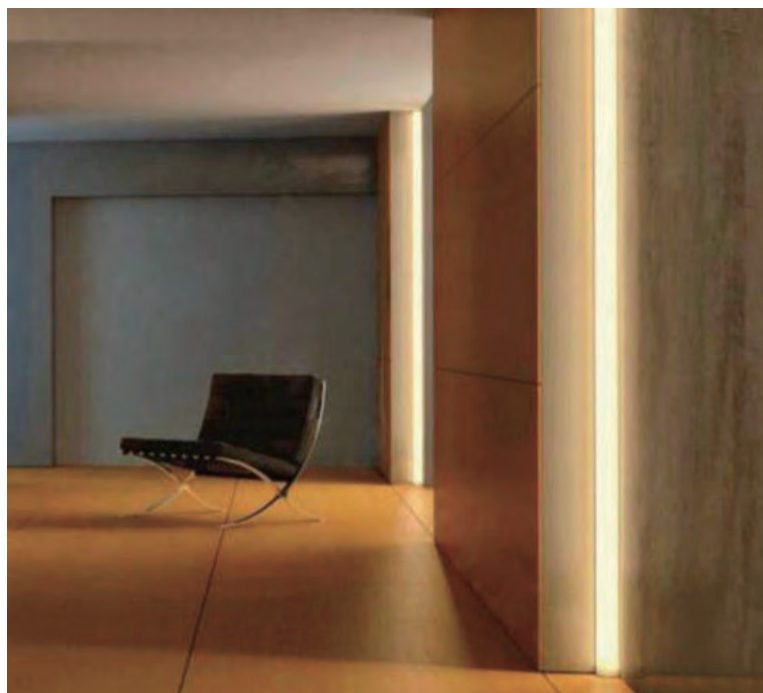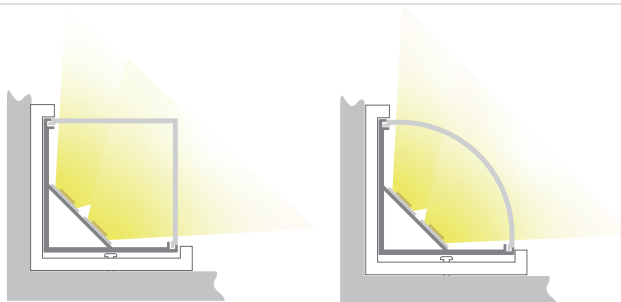




Aluminium Profile



AV2



LW-AV2



Specification:

Suitable for PCB 12mm

Max. LED power: 9.6w/m

Installation: Corner mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 20mm, (H) 16mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: AV2-O (Opal, light trans. >50%)

Installing accessories:



Plastic Endcap
(with/without hole)
Code: AV2-Cap-R
Code: AV2-Cap-L



Metal Clip
Code: US20-Clip-M



Joiners 180°A
Code: J-180A



Joiners 90°B
Code: J-90B





Joiners 90°A
Code: J-90A




Joiners 120°B
Code: J-120B



Joiners 120°A
Code: J-120A





LW-AT7N



Aluminium Profile



AT7N

Specification:

Suitable for PCB 18mm

Max. LED power: 19.2w/m

Installation: Wall/Ceiling recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 55.5mm, (H) 46.6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AT7N-O (Opal, light trans. >52%)

Code: AT7N-F (Frost, light trans. >81%)

Code: AT7N-C (Clear, light trans. >95%)


PC Diffuser

Code: AT7N-O (Opal, light trans. >50%)

Installing accessories:




Plastic Endcap Code: AT7N-Cap
(with/without hole) Code: AT7N-Cap-H




Catalogue

- 1 SURFACE
- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS


- 2 RECESSED
- 4 SURFACE & SUSPENSION**
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL
- 14 BEND & CURVED




LW-US20
Page 66




LW-U20
Page 68




LW-AT4
Page 70




LW-AT5
Page 70




LW-AT6
Page 70




LW-AT11
Page 72




LW-AT5H
Page 72




LW-AT15
Page 74




LW-AT15-30
Page 74




LW-AT15-60
Page 74




LW-AT16-4
Page 76




LW-AT16-5
Page 76




LW-AT16-5H
Page 76




LW-AT16-11
Page 78



LW-AT16-30
Page 78




LW-AT16-60
Page 78

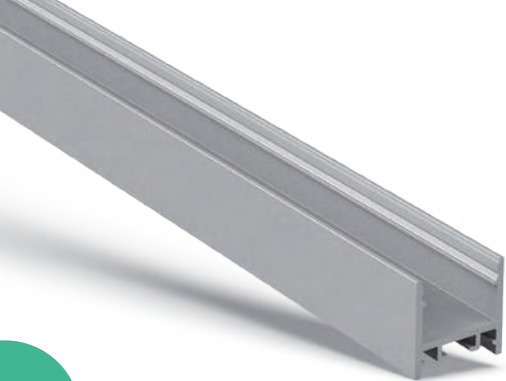

Aluminium Profile



US20



LW-US20



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 20mm, (H) 20mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: US20-O (Opal, light trans. >55%)






Black Diffuser

Code: US20-B (Black, light trans. > 22%)
MOQ: 200M

Installing accessories:

	Plastic Endcap (with/without hole) Code: US20-Cap Code: US20-Cap-H		Metal Clip Code: US20-Clip-M
	Suspension Kits Code: Sus.KitsA		Joiners 90°A Code: J-90A
	Joiners 90°B Code: J-90B		Joiners 120°A Code: J-120A
	Joiners 120°B Code: J-120B		Joiners 180°A Code: J-180A
	Aluminium diffuser Code-US20-AD		

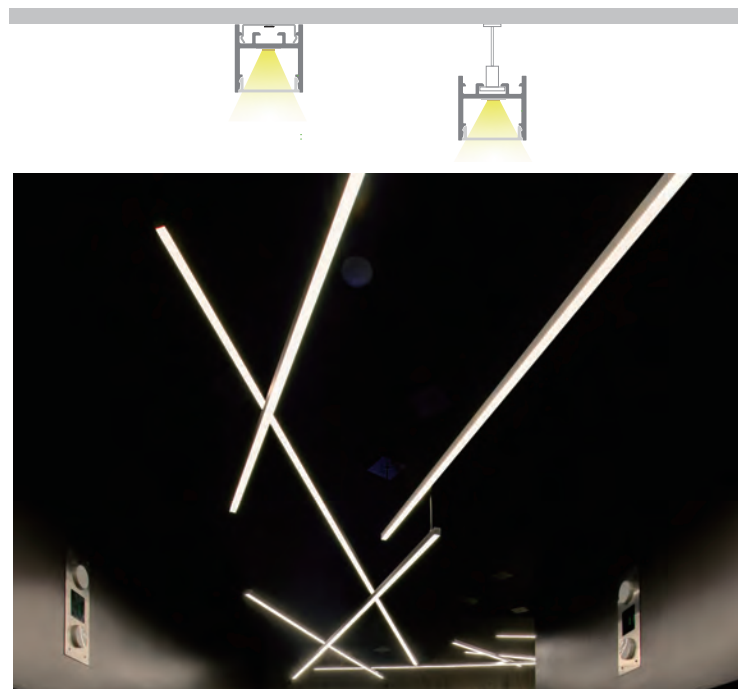

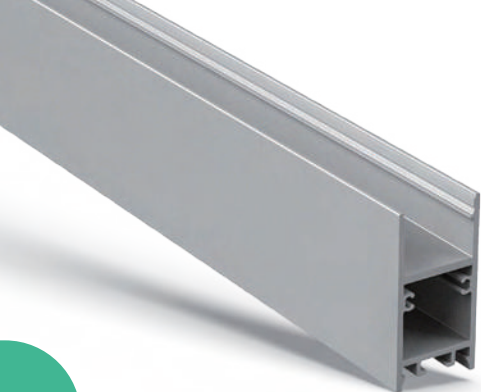

LW-U20



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 20mm, (H) 40mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



U20



PMMA Diffuser











Code: U20-O (Opal, light trans. >55%)




Black Diffuser

Code: US20-B (Black, light trans. > 22%)
MOQ: 200M



Installing accessories:

	CNC Aluminum Cap (without hole)	Code: U20-Cap		Metal Clip Code: U20-Clip-M
 (Optional)	Aluminium Endcap (without hole)	Code: U20-Cap	 (Optional)	Suspension Kits Code: Sus.KitsA
 (Optional)	Joiners 90°A Code: J-90A		 (Optional)	Joiners 90°B Code: J-90B
 (Optional)	Joiners 120°A Code: J-120A		 (Optional)	Joiners 120°B Code: J-120B
 (Optional)	Joiners 180°A Code: J-180A		 (Optional)	Aluminium diffuser Code: US20-AD

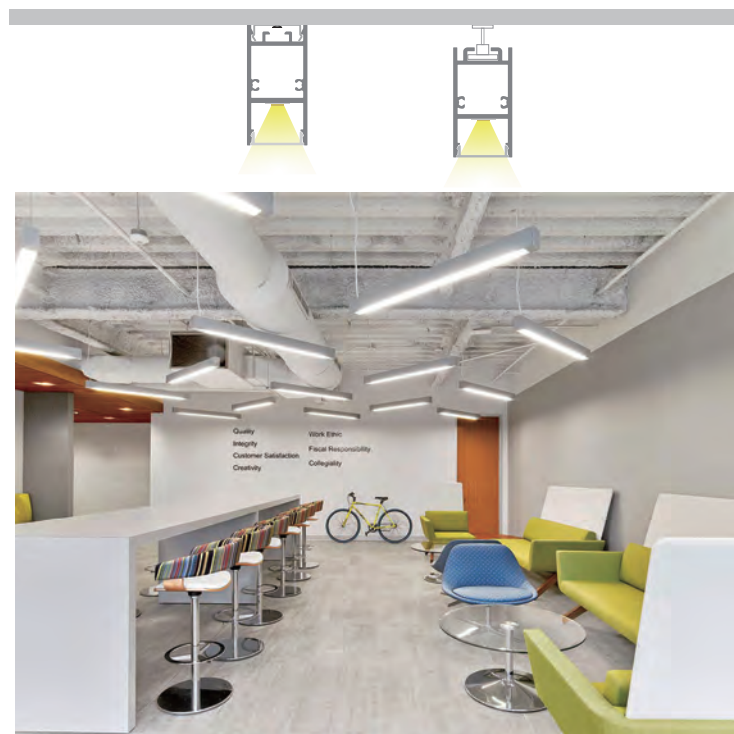





Aluminium Profile




LW-AT4



LW-AT5



LW-AT6



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 19.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AT4-O (Opal, light trans. >52%)

Code: AT4-F (Frost, light trans. >72%)



PMMA Diffuser

Code: AT5-O (Opal, light trans. >52%)

Code: AT5-F (Frost, light trans. >72%)



Black Diffuser

Code: AT5-B (Black, light trans. >22%)

MOQ: 200M





PMMA 30° Lens

Code: AT6-C (Clear, light trans. >95%)


Installing accessories:

	Plastic Endcap (with/without hole)	Code: AT4-Cap Code: AT4-Cap-H		Metal Clip Code: AT11-Clip-M
	Plastic Endcap (with/without hole)	Code: AT5-Cap Code: AT5-Cap-H		Suspension Kits Code: Sus.KitsA
	Plastic Endcap (with/without hole)	Code: AT6-Cap Code: AT6-Cap-H		Joiners 180°A Code: J-180A
	Adjustable Clip (0-222° rotation)	Code: AT11-Clip-A		Joiners 90°B Code: J-90B
	Joiners 120°A Code: J-120A			Joiners 120°B Code: J-120B
	Joiners 90°A Code: J-90A			

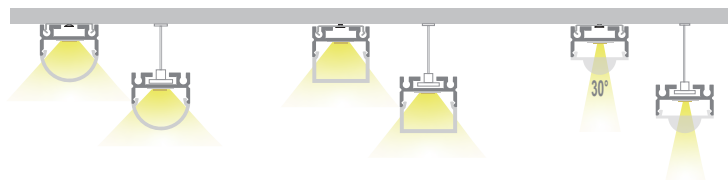




LW-AT11



LW-AT5H



Aluminium Profile



AT11



AT5H

Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (AT11)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 12.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AT11-O (Opal, light trans. >68%)

Code: AT11-F (Frost, light trans. >83%)





PMMA Diffuser

Code: AT5H-O (Opal, light trans. >52%)

Installing accessories:

	Aluminium Endcap (with/without hole) Code: AT11-Cap Code: AT11-Cap-H		Metal Clip Code: AT11-Clip-M
	Aluminium Endcap (with/without hole) Code: AT5H-Cap Code: AT5H-Cap-H		Joiners 180°A Code: J-180A
	Adjustable Clip (0-222° rotation) Code: AT11-Clip-A		Joiners 90°A Code: J-90A
	Joiners 90°B Code: J-90B		Joiners 120°A Code: J-120A
	Joiners 120°B Code: J-120B		Suspension Kits Code: Sus.KitsA

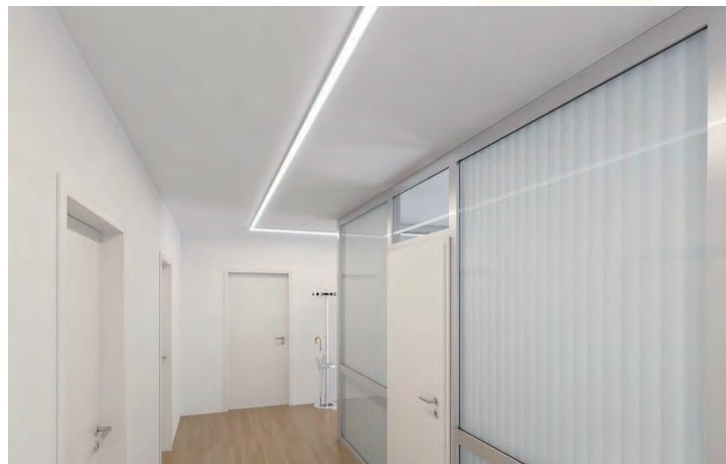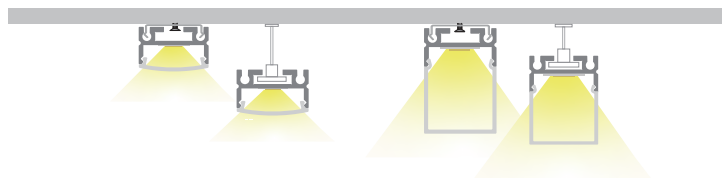



Aluminium Profile




AT15




AT15-30




AT15-60




LW-AT15



LW-AT15-30



LW-AT15-60



Specification:

Suitable for PCB 10mm

Max. LED power: 28.8w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous, lens in 350mm**

Size: Profile (W) 25mm, (H) 29.7mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AT15-30-O (Opal, light trans. >52%)

Code: AT15-30-F (Frost, light trans. >81%)



PMMA 30° Lens

Code: AT15-30-C (Clear, light trans. >95%)



PMMA 60° Lens

Code: AT15-60-C (Clear, light trans. >95%)

Installing accessories:



Aluminium Endcap Code: AT15-30-Cap
(with/without hole) Code: AT15-30-Cap-H



(Optional)

Suspension Kits
Code: Sus.KitsA



(Optional)

Joiners 180°A
Code: J-180A



(Optional)

Joiners 90°A
Code: J-90A



(Optional)

Joiners 90°B
Code: J-90B




(Optional)



Joiners 120°A
Code: J-120A




(Optional)

Joiners 120°B
Code: J-120B

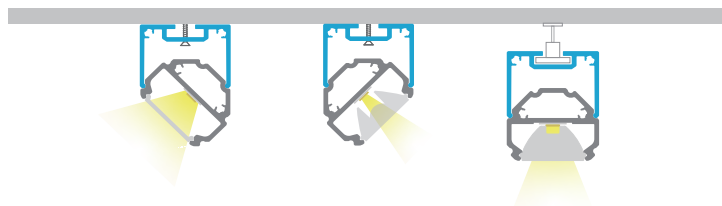


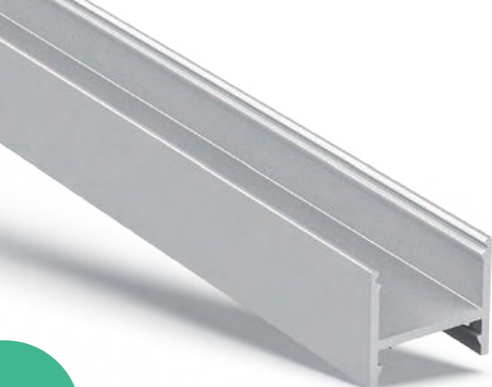

LW-AT16-4



LW-AT16-5



LW-AT16-5H



80°

Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.5mm, (H) 26.3mm

Driver installation: Remote driver required


* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



AT16-4



AT16-5



AT16-5H



PMMA Diffuser

Code: AT16-4-O (Opal, light trans. >52%)

Code: AT16-4-F (Frost, light trans. >72%)



PMMA Diffuser

Code: AT16-5-O (Opal, light trans. >52%)

Code: AT16-5-F (Frost, light trans. >72%)




PMMA Diffuser

Code: AT16-5H-O (Opal, light trans. >52%)

Installing accessories:

	Aluminium Endcap (with/without hole)	Code: AT16-4-Cap-R Code: AT16-4-Cap-L		Metal Clip Code: US20-Clip-M
	Aluminium Endcap (with/without hole)	Code: AT16-5-Cap Code: AT16-5-Cap-H		Suspension Kits Code: Sus.KitsA
	Aluminium Endcap (with/without hole)	Code: AT16-5H-Cap Code: AT16-5H-Cap-H		Joiners 90°A Code: J-90A
	Joiners 90°B Code: J-90B			Joiners 120°A Code: J-120A
	Joiners 120°B Code: J-120B			Joiners 180°A Code: J-180A

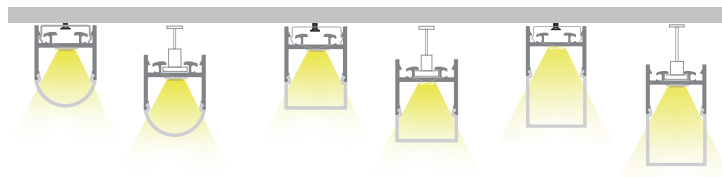




Aluminium Profile




AT16-11




AT16-30




AT16-60




LW-AT16-11



LW-AT16-30



LW-AT16-60



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Surface/Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (AT16-11)

Length: 2000mm or 2500mm continuous, lens in 350mm (AT16-30-60) **

Size: Profile (W) 19.5mm, (H) 17.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AT16-11-O (Opal, light trans. >52%)

Code: AT16-11-F (Frost, light trans. >81%)




PMMA 30° Lens

Code: AT16-30-C (Clear, light trans. >95%)



PMMA 60° Lens

Code: AT16-60-C (Clear, light trans. >95%)




Clear lens 30°



Clear lens 60°


Installing accessories:

	Aluminium Endcap Code: AT16-11-Cap (with/without hole) Code: AT16-11-Cap-H		Metal Clip Code: US20-Clip-M
	Aluminium Endcap Code: AT16-30-60-Cap (with/without hole) Code: AT16-30-60-Cap-H		Joiners 90°A Code: J-90A
	Suspension Kits Code: Sus.KitsA		Joiners 120°A Code: J-120A
	Joiners 90°B Code: J-90B		Joiners 180°A Code: J-180A
	Joiners 120°B Code: J-120B		

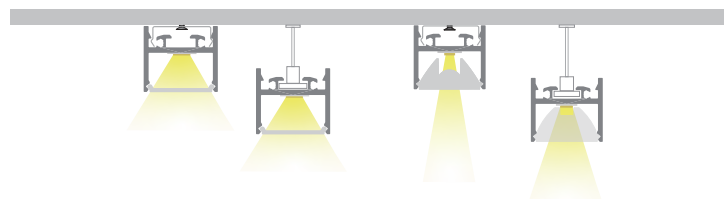


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




LW-WP2
Page 82




LW-WP3
Page 84




LW-WP3-30
Page 84




LW-WP3-60
Page 84




LW-AA
Page 86




LW-AB
Page 88




LW-AF1
Page 90




LW-AF2
Page 92



LW-AF3
Page 94



LW-WP2



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.1mm, (H) 17mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Aluminium Profile



WP2



PMMA Diffuser

Code: WP2-O (Opal, light trans. >52%)

Installing accessories:




Plastic Endcap
(with/without hole) Code: WP2-Cap
Code: WP2-Cap-H



Metal Clip
Code: AS1-Clip-M



Plastic Clip
Code: AS1-Clip-P





Aluminium Profile




WP3




WP3-30




WP3-60




LW-WP3



LW-WP3-30



LW-WP3-60



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 28mm, (H) 33mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PMMA Diffuser

Code: WP3-C (Clear, light trans. >95%)



PMMA 30° Lens

Code: WP3-30-C (Clear, light trans. >95%)



PMMA 60° Lens

Code: WP3-60-C (Clear, light trans. >95%)



Installing accessories:



Outside End Caps Code: WP3-Cap
(with/without hole) Code: WP3-Cap-H




Inside End Caps
Code: WP3-Cap-inside

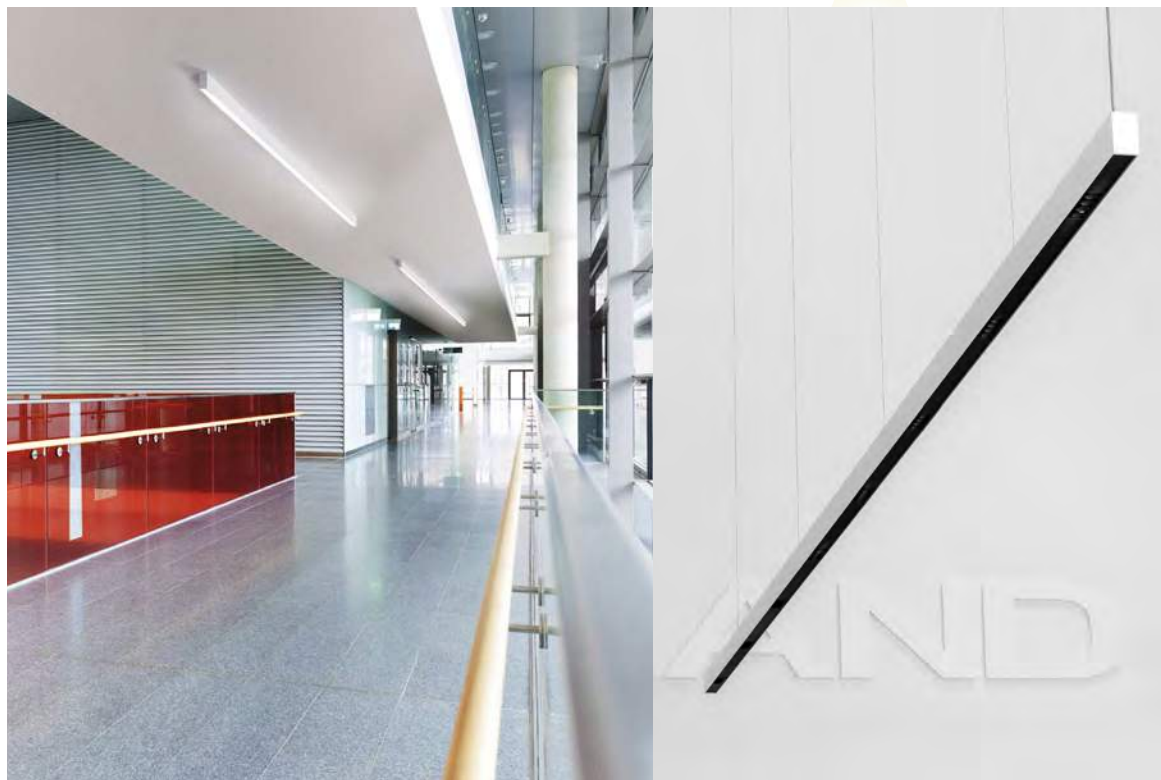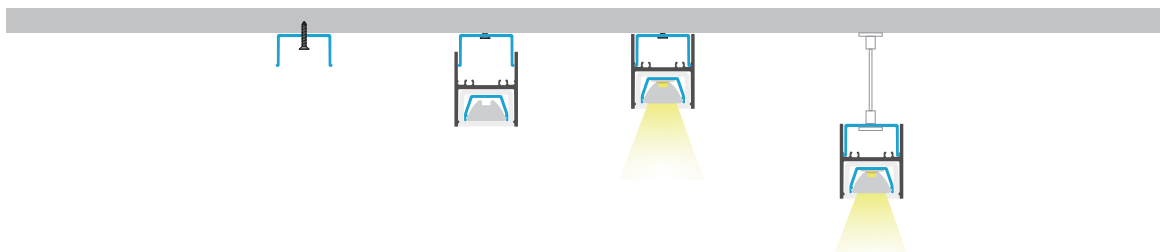




Aluminium Profile



AA



LW-AA



Specification:

Suitable for PCB 10mm

Max. LED power: 14.4w/m

Installation: Floor Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.1mm, (H) 8mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

Code: AA-O (Opal, light trans. >50%)

Installing accessories:






Plastic Endcap
(with/without hole) Code: AA-Cap
Code: AA-Cap-H



(Optional)

Metal Clip
Code: AA-Clip-M




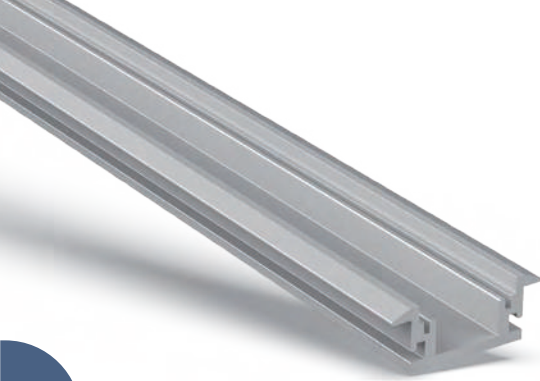

LW-AB



Aluminium Profile



AB



PC Diffuser

Code: AB-O (Opal, light trans. >50%)

Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Floor Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 28.6mm, (H) 11.2mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Installing accessories:





Plastic Endcap
(with/without hole) Code: AB-Cap
Code: AB-Cap-H




(Optional)

Metal Clip
Code: AB-Clip-M




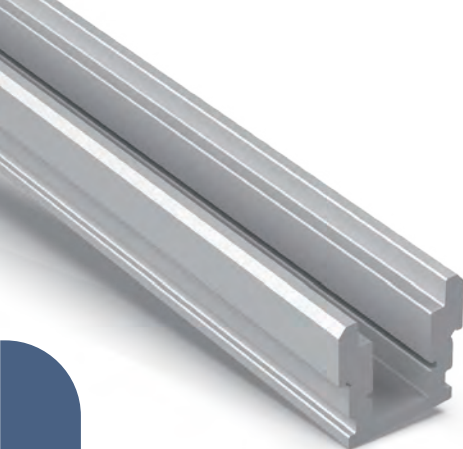

Aluminium Profile



AF1



LW-AF1



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Inground Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 26mm, (H) 25mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: AF1-O (Opal, light trans. >45%)

Installing accessories:




Plastic Endcap
(with/without hole) Code: AF1-Cap
Code: AF1-Cap-H




(Optional)

Metal Clip
Code: AF1-Clip-M




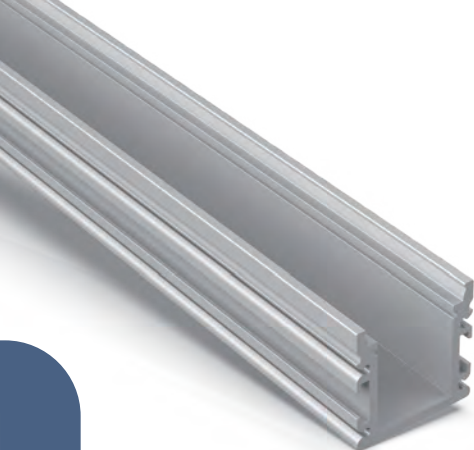

Aluminium Profile

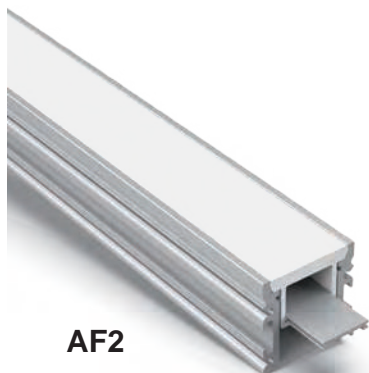

AF2



LW-AF2



Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Inground Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30.5mm, (H) 30mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.





PC Diffuser

Code: AF2-O (Opal, light trans. >45%)

Installing accessories:

	Aluminium Endcap (with/without hole) Code: AF2-Cap Code: AF2-Cap-H		Soft Endcap Code: AF2-Cap-H
	Waterproof Cable Grommet Code: AF2-WP		Metal Clip Code: AF2-Clip-M
	IP68 Waterproof Connector Code: AF2-WC		IP68 Waterproof Box Code: AF2-WB





LW-AF3



Specification:

Suitable for PCB 15 mm

Max. LED power: 19.2w/m

Installation: Inground Recessed

Material: Extruded Aluminium 6063 + Stainless steel 304

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 69mm, (H) 65mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Aluminium Profile



AF3



PC Diffuser

Code: AF3-O (Opal, light trans. >45%)



Installing accessories:



Aluminium Endcap Code: AF3-Cap
(without hole)



Soft Endcap
Code: AF3-Cap-H



Stainless steel side bar
Code: AF3-SB



Glass Diffuser
Code: AF3-Glass



(Optional)

Waterproof Cable Grommet
Code: AF3-WP




(Optional)

IP68 Waterproof Box
Code: AF3-WB





(Optional)

IP68 Waterproof Connector
Code: AF3-WC




Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	<i>STEP AND STAIR</i>
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED

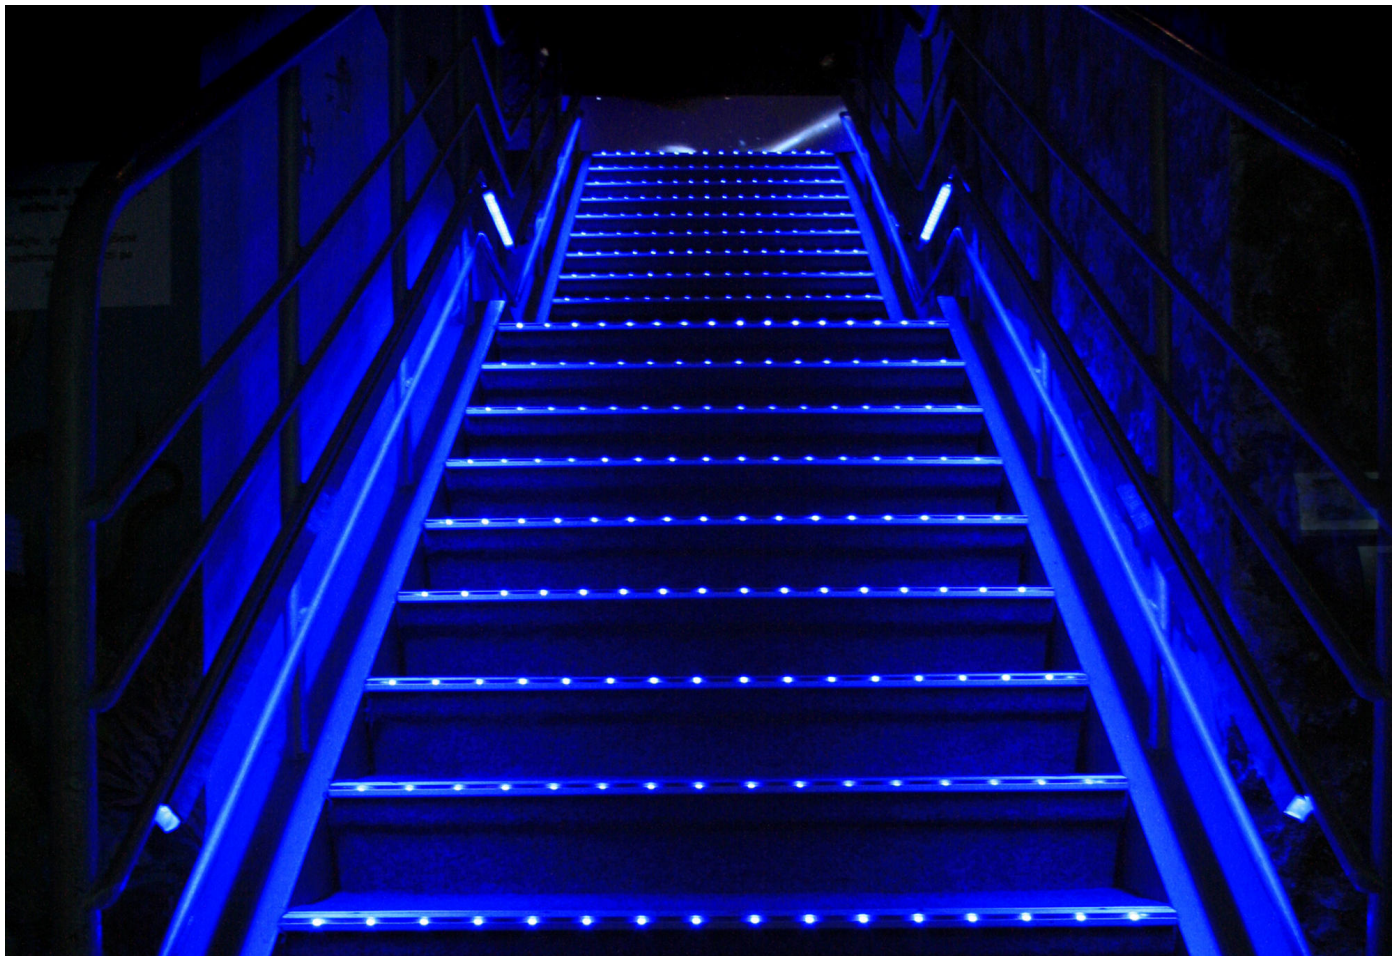


LW-ST1
Page 98



LW-ST2
Page 100



LW-STR3
Page 102



LW-ST1



Aluminium Profile



ST1



PMMA Diffuser

Code: ST1-O (Opal, light trans. >52%)
 Code: ST1-M (Milky, light trans. >65%)
 Code: ST1-F (Frost, light trans. >81%)
 Code: ST1-C (Clear, light trans. >95%)

PC Diffuser

Code: ST1-O (Opal, light trans. >50%)
 Code: ST1-F (Frost, light trans. >79%)
 Code: ST1-C (Clear, light trans. >93%)



Black Diffuser

Code: AS1-B (Black, light trans. > 22%)
 MOQ: 200M

Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Step and Stair

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 67.5mm, (H) 27.8mm

Driver installation: Remote driver required


* Custom powder coated colour upon request. Surcharge apply.


** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Installing accessories:



Plastic Endcap Code: ST1-Cap-H
(with/without hole) Code: ST1-Cap-L

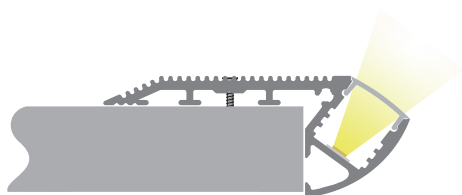



LW-ST2

40°



Specification:

Suitable for PCB 5mm

Max. LED power: 9.6w/m

Installation: Step and Stair

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 60mm, (H) 27.5mm

Driver installation: Remote driver required


* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



ST2

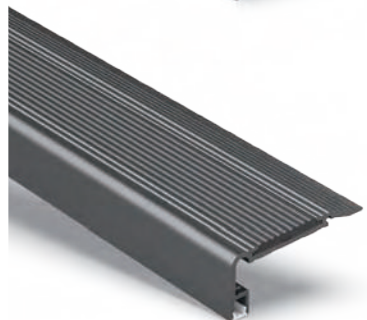

PC Diffuser

Code: ST2-O (Opal, light trans. >50%)

Code: ST2-C (Clear, light trans. >93%)

Installing accessories:




Plastic Endcap
(without hole)

Code: ST2-Cap-R
Code: ST2-Cap-L



Anti-slip rubber
Code: ST2-ASRUB






LW-STR3



Aluminium Profile

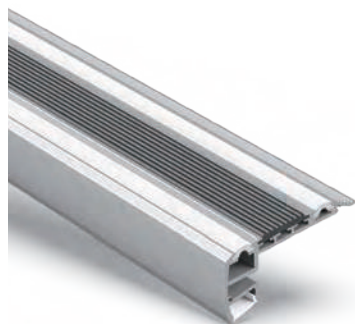

STR3

Specification:

Suitable for PCB 15mm

Max. LED power: 19.2w/m

Installation: Step and Stair

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 82.4mm, (H) 37.9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: STR3-O (Opal, light trans. >52%)

Code: STR3-M (Milky, light trans. >65%)

Code: STR3-F (Frost, light trans. >81%)

Code: STR3-C (Clear, light trans. >95%)

PC Diffuser

Code: STR3-O (Opal, light trans. >50%)

Code: STR3-F (Frost, light trans. >79%)

Code: STR3-C (Clear, light trans. >93%)



Installing accessories:





Plastic Endcap
(without hole)
Code: STR3-Cap-R
Code: STR3-Cap-L



Anti-slip rubber (25mm)
Code: STR3-ASRUB-B





Anti-slip rubber
Code: STR3-ASRUB

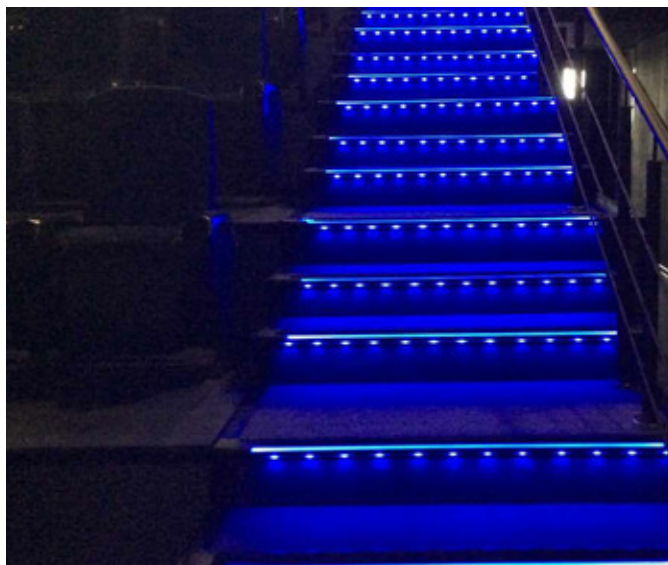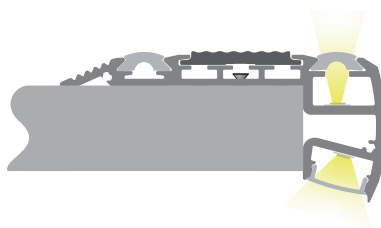


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED

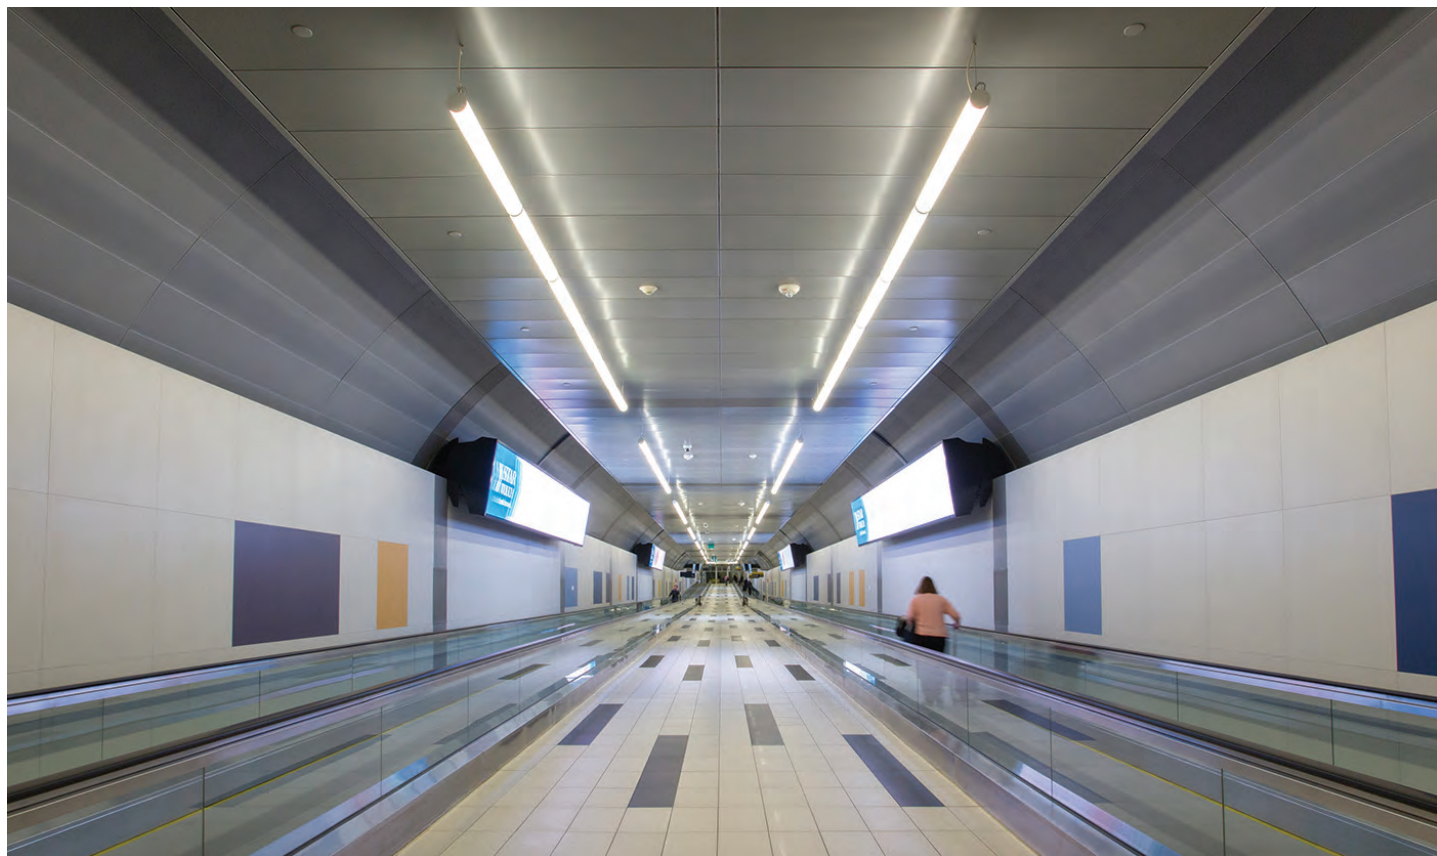


LW-R30
Page 106



LW-R34
Page 108



LW-R60
Page 110



LW-R30



Specification:

Suitable for PCB 18mm

Max. LED power: 28.8w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 30mm, (H) 30mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Aluminium Profile



R30



PC Diffuser

Code: R30-O (Opal, light trans. >50%)



Installing accessories:




Plastic Endcap
(with/without hole) Code: R30-Cap
Code: R30-Cap-H



Suspension Kits
Code: Sus.KitsA

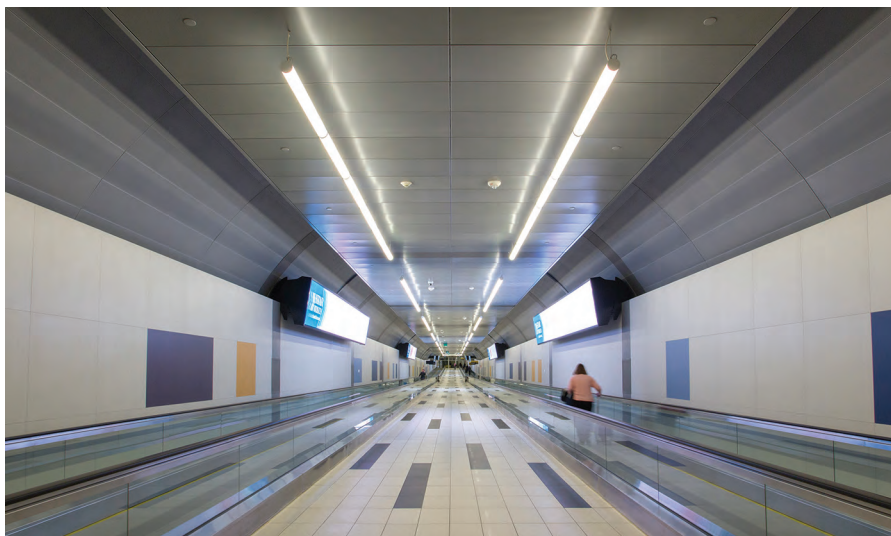



LW-R34



Specification:

Suitable for PCB 24mm

Max. LED power: 28.8w/m

Installation: Wardrobe hanging /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 34mm, (H) 34mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 5000mm.

Aluminium Profile



R34

Extrusive in Australia



PC Diffuser

Code: R34-O (Opal, light trans. >50%)

Installing accessories:



Aluminium Endcap Code: R34-Cap
(with/without hole) Code: R34-Cap-H





Wall Bracket
Code: R34-A



(Optional)

Supporter
Code: R34-B




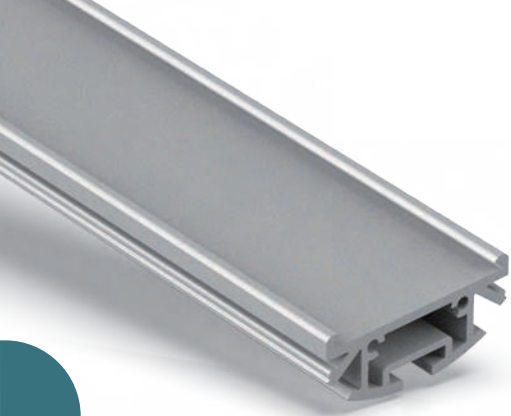

Aluminium Profile



R60



LW-R60



Specification:

Suitable for PCB 30mm

Max. LED power: 28.8w/m

Installation: Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 60mm, (H) 60mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: R60-O (Opal, light trans. >50%)

Installing accessories:



Plastic Endcap Code: R60-Cap
(without hole)




Suspension Kits
Code: Sus.KitsA




(Optional)

Aluminium Endcap Code: R60-Cap
(without hole)




Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




LW-AW1
Page 114




LW-AW2
Page 116




LW-AW4-1
Page 118




LW-AW8
Page 120



LW-AW5-1
Page 122



LW-AW35
Page 124

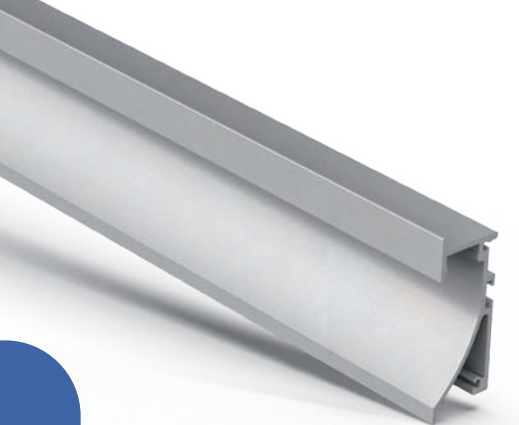

Aluminium Profile



AW1



LW-AW1



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Wall flush

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 25.4mm, (H) 60mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: AW1-O (Opal, light trans. >52%)

Code: AW1-M (Milky, light trans. >65%)

Code: AW1-F (Frost, light trans. >81%)

Code: AW1-C (Clear, light trans. >95%)

PC Diffuser

Code: AW1-O (Opal, light trans. >52%)



Installing accessories:





Aluminium Endcap Code: AW1-Cap-L
(with/without hole) Code: AW1-Cap-R




Metal Clip
Code: AW1-Clip-M



Spring Clip
Code: SC-AW1






LW-AW2



Aluminium Profile

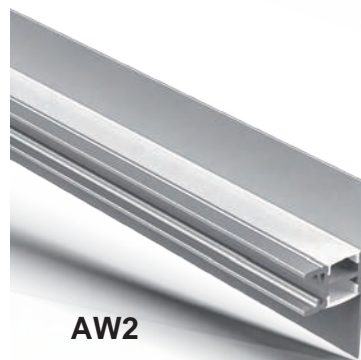

AW2

Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 27.7mm, (H) 70mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: AW2-O (Opal, light trans. >52%)

Code: AW2-M (Milky, light trans. >65%)

Code: AW2-F (Frost, light trans. >81%)

Code: AW2-C (Clear, light trans. >95%)

PC Diffuser

Code: AW2-O (Opal, light trans. >52%)






Installing accessories:




Aluminium Endcap Code: AW2-Cap
(without hole)



Metal Clip
Code: AW2-Clip-M

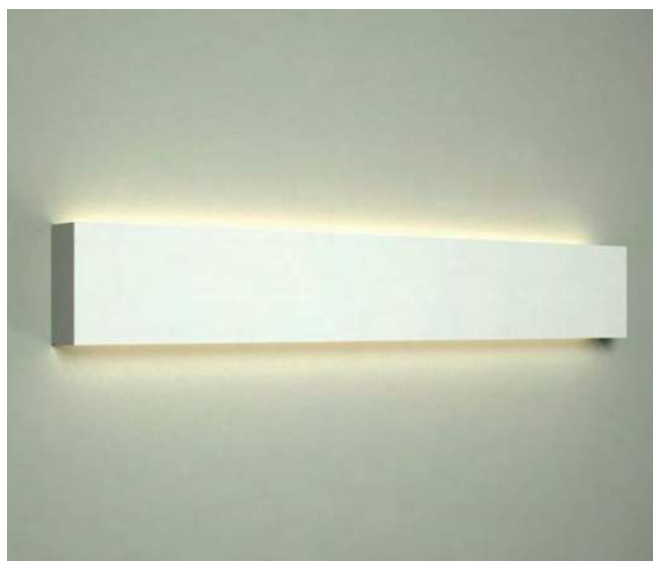



LW-AW4-1



Specification:

Suitable for PCB 12mm

Max. LED power: 14.4w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 23.6mm, (H) 83mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Aluminium Profile



AW4-1

PMMA Diffuser

Code: AW4-1-O (Opal, light trans. >52%)

Code: AW4-1-M (Milky, light trans. >65%)

Code: AW4-1-F (Frost, light trans. >81%)

Code: AW4-1-C (Clear, light trans. >95%)

PC Diffuser


Code: AW4-1-O (Opal, light trans. >52%)




Installing accessories:



Aluminium Endcap Code: AW4-1-Cap
(without hole)

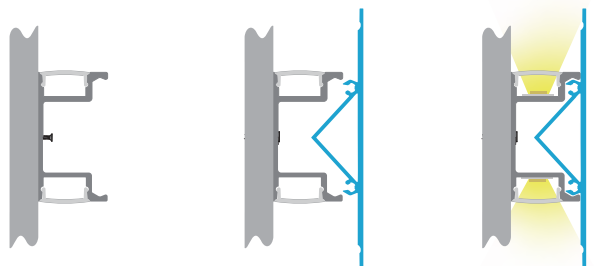



LW-AW8



Specification:

Suitable for PCB 12mm

Max. LED power: 19.2w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 17.5mm, (H) 40.7mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

Aluminium Profile



AW8



PC Diffuser

Code: AW8-O (Opal, light trans. >52%)



Installing accessories:





Plastic Endcap Code: AW8-Cap-R
(without hole) Code: AW8-Cap-L



Metal Clip
Code: AW8-Clip-M

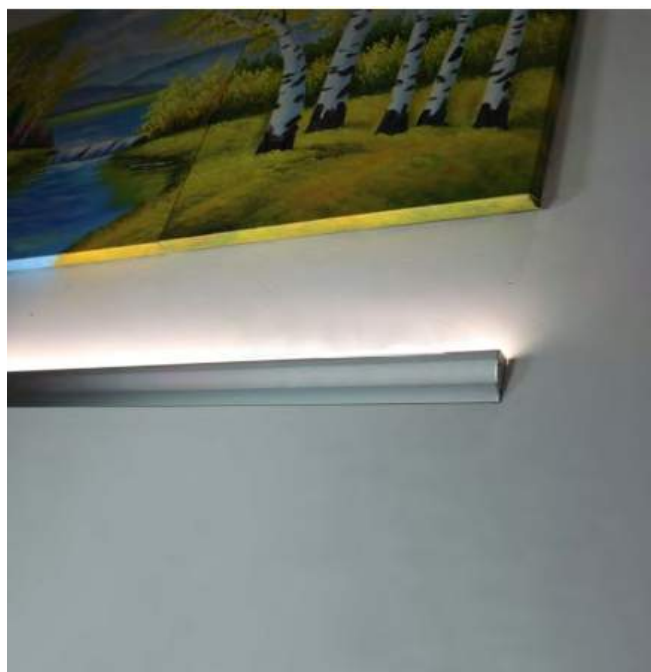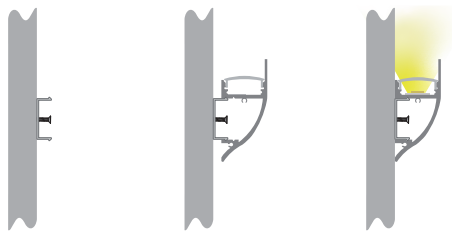

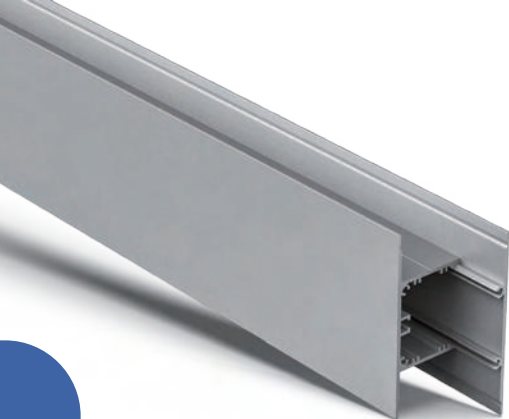

LW-AW5-1



Aluminium Profile



AW5-1

Specification:

Suitable for PCB 30mm

Max. LED power: 19.2w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 83mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.

PMMA Diffuser

Code: AW5-1-O (Opal, light trans. >63%)

Code: AW5-1-N (New opal, light trans. >74%)

Code: AW5-1-F (Frost, light trans. >89%)

Code: AW5-1-C (Clear, light trans. >95%)




Installing accessories:




Aluminium Endcap Code: AW5-1-Cap
(without hole)



Suspension Kits
Code: Sus.KitsA

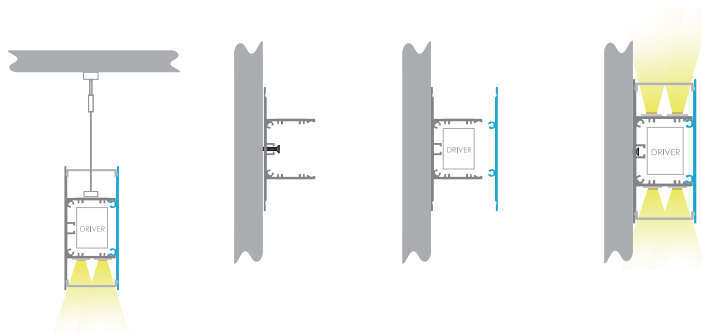


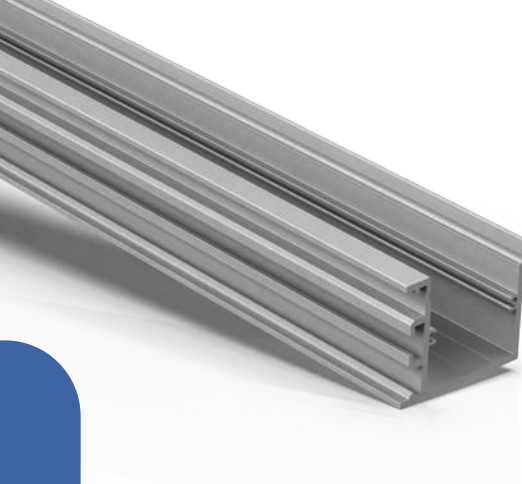

Aluminium Profile



AW35



LW-AW35



Specification:

Suitable for PCB 30mm

Max. LED power: 38.4w/m

Installation: Wall Surface mounted

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 42mm, (H) 35mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: AW35-O (Opal, light trans. >63%)



Code: AW35-N (New opal, light trans. >74%)

Code: AW35-F (Frost, light trans. >89%)

Code: AW35-C (Clear, light trans. >95%)


Installing accessories:

	Metal Clip Code:MC-WN35	 (Optional)	Joiners 180°A Code: J-180A
 (Optional)	Screwless Endcap (with hole) Code:AW35-Cap-N	 (Optional)	Joiners 90°B Code: J-90B
 (Optional)	Joiners 90°A Code: J-90A	 (Optional)	Joiners 120°B Code: J-120B
 (Optional)	Joiners 120°A Code: J-120A		

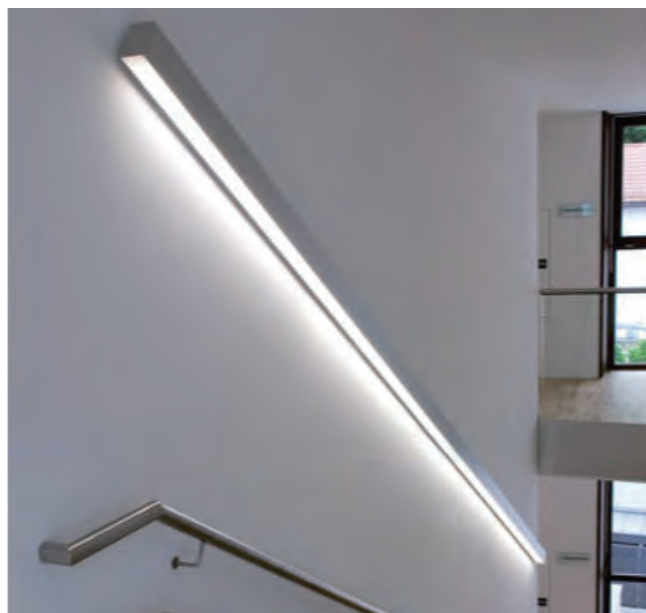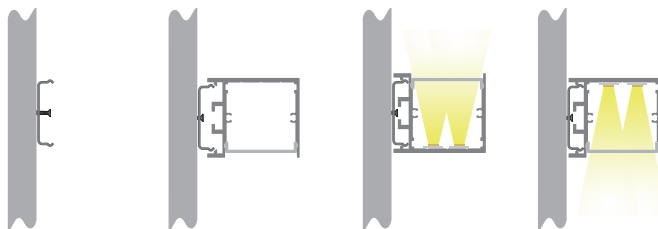


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	<i>DRIVER BUILT-IN PROFILE</i>	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




LW-P35
Page 128




LW-PU35
Page 128




LW-PUH35
Page 128




LW-P46
Page 130




LW-P50N
Page 132



LW-P60
Page 134



LW-EH80
Page 136




LW-P74
Page 138



Aluminium Profile




P35

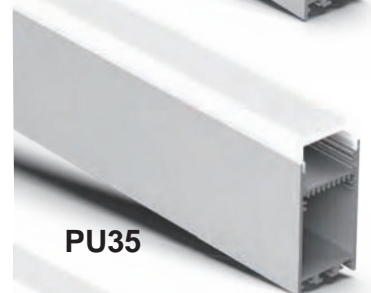


PU35




PUH35



LW-P35



LW-PU35



LW-PUH35



Specification:

Suitable for PCB 30mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled(p35)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 68mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: P35-O (Opal, light trans. >63%)

Code: P35-N (New opal, light trans. >74%)

Code: P35-F (Frost, light trans. >89%)

Code: P35-C (Clear, light trans. >95%)



Black Diffuser

Code: WN31-B (Black, light trans. > 22%)

MOQ: 200M



PMMA Diffuser













Code: PU35-O (Opal, light trans. >60%)





PMMA Diffuser

Code: PUH35-O (Opal, light trans. >60%)

Installing accessories:

	Aluminium Endcap (without hole) Code: P35-Cap		Suspension Kits Code: Sus.KitsA
	Aluminium Endcap (without hole) Code: PU35-Cap		Wall Clips Code: WN35-WClip
	Aluminium Endcap (without hole) Code: PUH35-Cap		Joiners 90°A Code: J-90A
	Joiners 180°A Code: J-180A		CNC Aluminum Cap (without hole) Code: P35-Cap-N
	Dali & Push Dimmable LED Driver 30/36/60/100W Code:LW-SCD		Metal Clip Code: P35-Clip-M
	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD		Joiners 120°A Code: J-120A

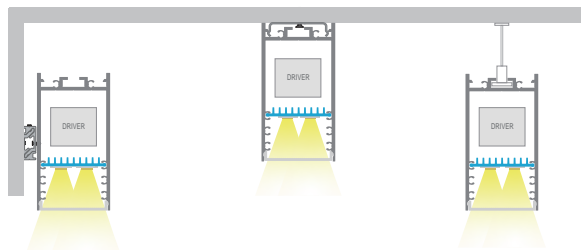

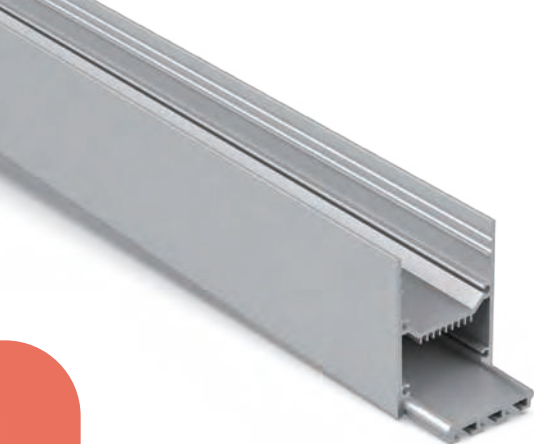


Aluminium Profile




P46

Extrusive in Australia



LW-P46



LW-P46



Specification:

Suitable for PCB 25mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 46mm, (H) 68.5mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.




PMMA Diffuser

Code: P46-O (Opal, light trans. >60%)

Installing accessories:

	Aluminium Endcap (without hole) Code: P46-Cap		Suspension Kits Code: Sus.KitsA
 (Optional)	CNC Aluminum Cap (without hole) Code: P46-Cap-N	 (Optional)	Wall Clips Code: WClip
 (Optional)	Joiners 180°A Code: J-180A	 (Optional)	Joiners 90°A Code: J-90A
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60W Code: LW-SCD	 (Optional)	Joiners 120°A Code: J-120A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD		



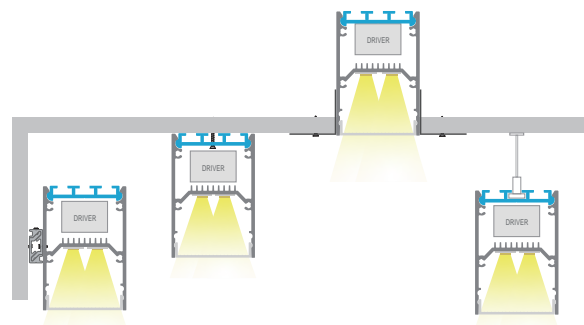




Aluminium Profile



P50N



LW-P50N



Specification:

Suitable for PCB 18mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 50mm, (H) 75mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser (Down)

Code: P50N-O (Opal, light trans. >60%)

Code: P50N-N (New opal, light trans. >74%)



PMMA Diffuser (Up)

Code: P50N-O (Opal, light trans. >60%)

Code: P50N-N (New opal, light trans. >74%)


















Black Diffuser


Code: E50-B (Black, light trans. >22%)

MOQ: 200M

Installing accessories:

	Aluminum Screwless Endcap (without hole) Code: P50N-Cap-N		Suspension Kits Code: Sus.KitsB
	Metal Clip Code: P50N-Clip-M	 (Optional)	Wall Clips Code: WClip
 (Optional)	Stainless Steel L bracket Code: LW-LMB	 (Optional)	Joiners 90°A Code: J-90A
 (Optional)	Joiners 90°B Code: J-90B	 (Optional)	Joiners 120°A Code: J-120A
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W Code:LW-SCD	 (Optional)	Joiners 180°A Code: J-180A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD	 (Optional)	Joiners 120°B Code: J-120B
 (Optional)	Gear Tray Clip Code: P50N-Clip		

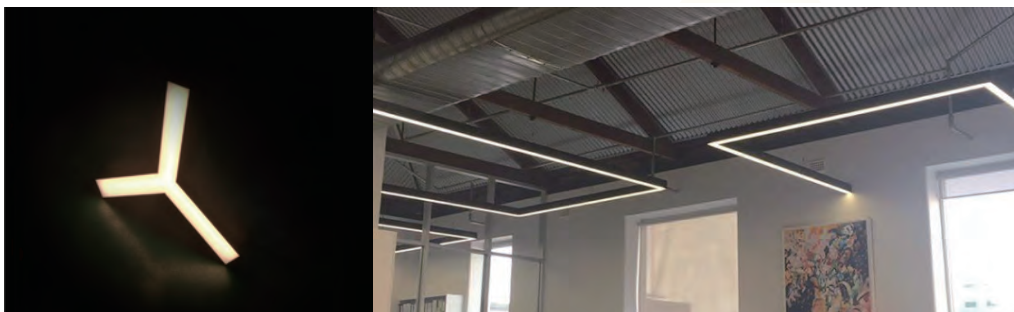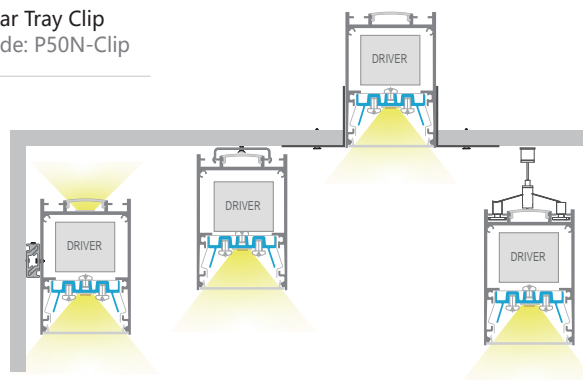



LW-P60



Specification:

Suitable for PCB 28mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 50mm, (H) 75mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



P60



PMMA Diffuser (Down)

Code: P60-N (New opal, light trans. >74%)




PMMA Diffuser (Up)

Code: AS3-O (New opal, light trans. >74%)

(For Zhaga Led PCB board), hole-free design


Installing accessories:

	Aluminium Endcap (without hole) Code: P60-Cap		Suspension Kits Code: Sus.KitsB
	CNC Aluminum Cap (without hole) Code: P60-Cap-N		Wall Clips Code: WClip
	Joiners 180°A Code: J-180A		Joiners 90°A Code: J-90A
	Joiners 90°B Code: J-90B		Joiners 120°A Code: J-120A
	Dali & Push Dimmable LED Driver 30/36/60/100W Code:LW-SCD		Joiners 120°B Code: J-120B
	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD		

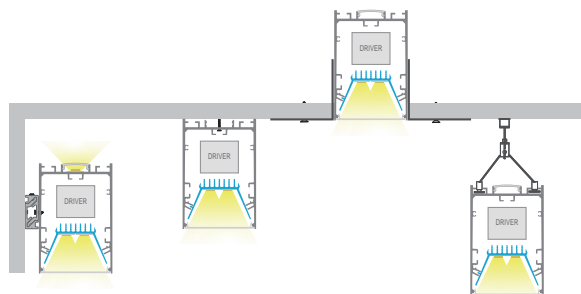




Aluminium Profile



EH80



LW-EH80



Specification:

Suitable for PCB 44mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 80mm, (H) 100mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser (Down)












Code: EH80-N (New opal, light trans. >74%)






PMMA Diffuser (Up)

Code: EH80-N (New opal, light trans. >74%)

Installing accessories:

	Aluminium Endcap (without hole) Code: EH80-Cap		Suspension Kits Code: Sus.KitsB
 (Optional)	Aluminum Screwless Endcap (without hole) Code: EH80-Cap-N	 (Optional)	Wall Clips Code: WClip
 (Optional)	Joiners 90°A Code: J-90A	 (Optional)	Joiners 90°B Code: J-90B
 (Optional)	Joiners 120°A Code: J-120A	 (Optional)	Joiners 120°B Code: J-120B
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W Code:LW-SCD	 (Optional)	Joiners 180°A Code: J-180A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD		

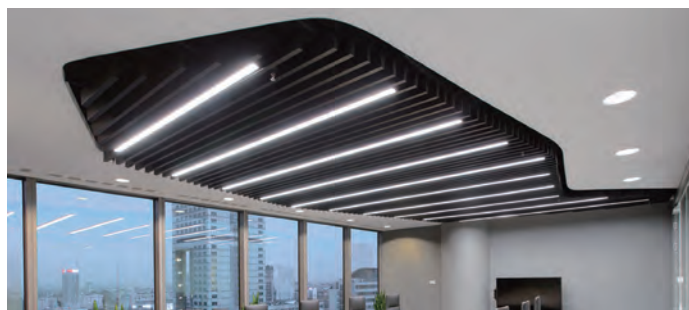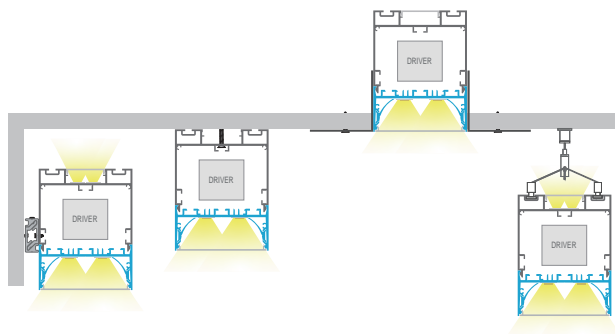



LW-P74



Aluminium Profile



P74

Specification:

Suitable for PCB 70mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 74mm, (H) 77mm

Driver installation: Remote or integral driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.




PMMA Diffuser

Code: P74-N (New opal, light trans. >77%)


Installing accessories:

	Aluminium Endcap (without hole) Code: P70-Cap		Suspension Kits Code: Sus.KitsA
	Joiners 90°A Code: J-90A		Wall Clips Code: WClip
	Dali & Push Dimmable LED Driver 30/36/60/100W Code: LW-SCD		Joiners 180°A Code: J-180A
	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD		Joiners 120°A Code: J-120A

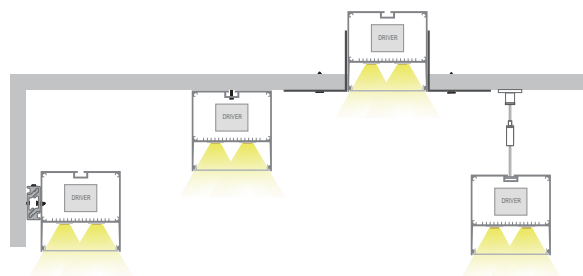


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




LW-TR35
Page 142





LW-TR50
Page 144



LW-TR60
Page 146



LW-TR80
Page 148

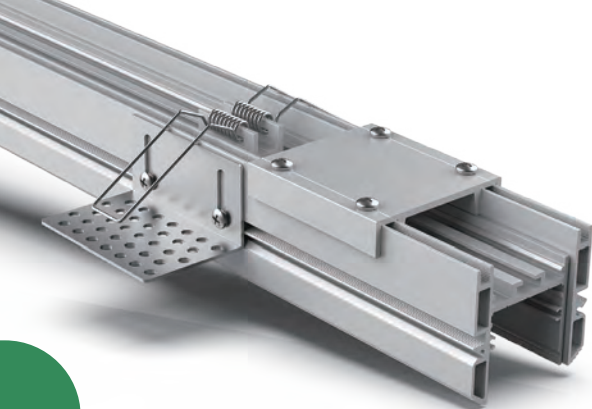

LW-TR35

60°



Aluminium Profile



TR35

Specification:

Suitable for PCB 30mm

Max. LED power: 28.8w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 54mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: TR35-O (Opal, light trans. >63%)

Code: TR35-N (New opal, light trans. >74%)


Code: TR35-F (Frost, light trans. >89%)



Code: TR35-C (Clear, light trans. >95%)



Installing accessories:

	Aluminium Endcap (without hole) Code: TR35-Cap		Aluminium Endcap (without hole) Code: TR35-Cap
	Stainless Steel L bracket Code: LW-LMB		Alum. bridge base Code: LW-TR35
	Spring Clip Code: SC-WN31		Joiners 180°A Code: J-180A
	Joiners 90°A Code: J-90A		Joiners 120°A Code: J-120A

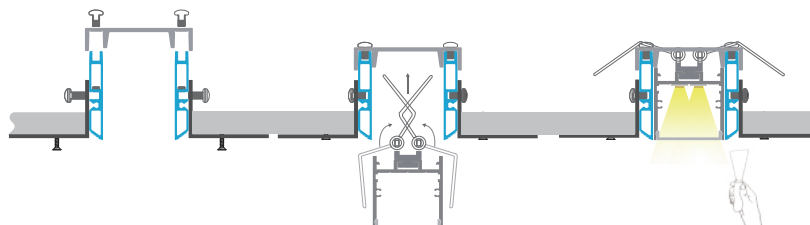

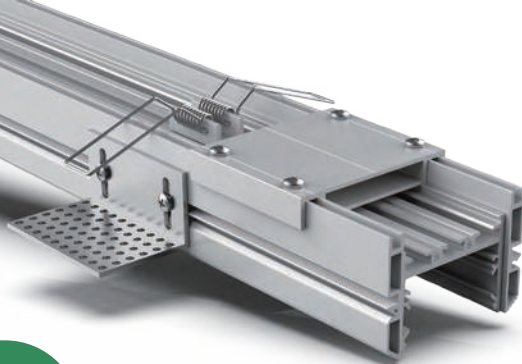

LW-TR50



Specification:

Suitable for PCB 45mm

Max. LED power: 38.4w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White*

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous**


Size: Profile (W) 67mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile

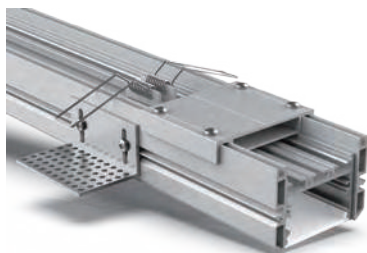

TR50



PMMA Diffuser

Code: TR50-O (Opal, light trans. >60%)

Code: TR50-N (New opal, light trans. >77%)

Installing accessories:




Aluminium Endcap Code: TR50-Cap
(without hole)



Aluminum Endcap
(without hole) Code: TR50-Cap



Stainless Steel L bracket
Code: LW-LMB



Alum. bridge base
Code: LW-TR50



Spring Clip
Code: SC-WN31



Joiners 180°A
Code: J-180A




Joiners 90°A
Code: J-90A




Joiners 180°B
Code: J-180B



Joiners 120°A
Code: J-120A

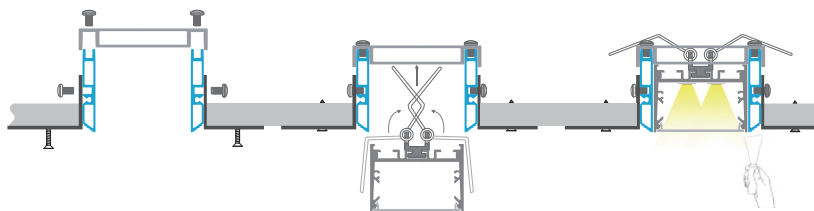



LW-TR60



Specification:

Suitable for PCB 55mm

Max. LED power: 57.6w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 76mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



TR60



PMMA Diffuser

Code: TR60-N (New opal, light trans. >74%)

Installing accessories:




Aluminium Endcap Code: TR60-Cap
(without hole)



Aluminium Endcap
(without hole) Code: TR60-Cap



Stainless Steel L bracket
Code: LW-LMB



Alum. bridge base
Code: LW-TR60



Spring Clip
Code: SC-WN31



Joiners 180°A
Code: J-180A




Joiners 90°A
Code: J-90A





Joiners 180°B
Code: J-180B



Joiners 120°A
Code: J-120A

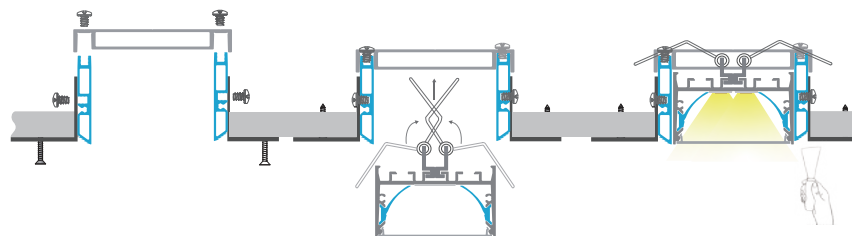

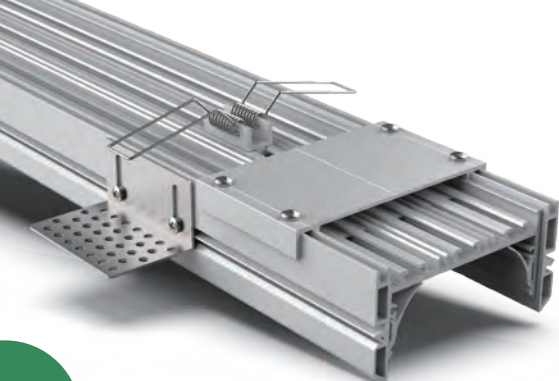

LW-TR80



Aluminium Profile



TR80

Specification:

Suitable for PCB 75mm

Max. LED power: 57.6w/m

Installation: Ceiling trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 96mm, (H) 48mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: TR80-N (New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap Code: TR80-Cap
(without hole)



Aluminum Endcap
(without hole) Code: TR80-Cap



Stainless Steel L bracket
Code: LW-LMB



Alum. bridge base
Code: LW-TR80



Spring Clip
Code: SC-WN31




(Optional)

Joiners 180°A
Code: J-180A



(Optional)

Joiners 90°A
Code: J-90A




(Optional)

Joiners 180°B
Code: J-180B




(Optional)

Joiners 120°A
Code: J-120A

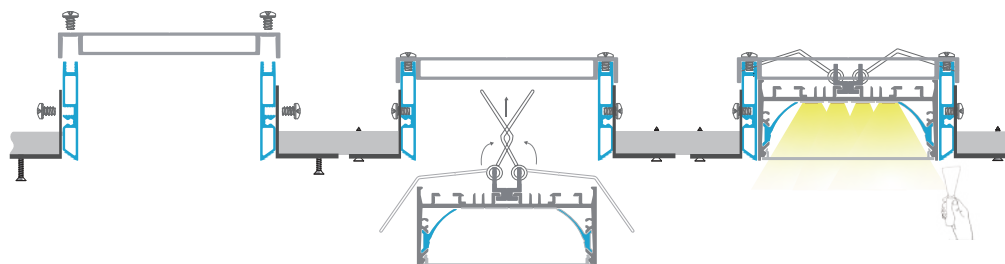


Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	<i>SURFACE & SUSPENSION-ARCHITECTURAL</i>	12	RECESSED-ARCHITECTURAL
13	PLASTER IN TRIMLESS	14	BEND & CURVED




LW-P24
Page 152




LW-WN35
Page 154




LW-WU35
Page 154




LW-WUH35
Page 154




LW-WN35-25
Page 156




LW-WU35-25
Page 156




LW-WUH35-25
Page 156




LW-E50
Page 158




LW-EU50
Page 158




LW-E60
Page 160




LW-E80
Page 162




LW-E100
Page 164



LW-EU60
Page 160



LW-EU80
Page 162




LW-W91
Page 166



Aluminium Profile



P24



LW-P24



Specification:

Suitable for PCB 24mm

Max. LED power: 38.4*2w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous**

Size: Profile (W) 25mm, (H) 120mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PMMA Diffuser

Code: P24-O (Opal, light trans. >55%)

Installing accessories:



Screwless aluminum Cap
(without hole)
Code: P24-Cap-N



Suspension Kits
Code: Sus.KitsA



(Optional)

Wall Clips
Code: WClip



(Optional)

Joiners 90°A
Code: J-90A




(Optional)


Joiners 180°A
Code: J-180A



(Optional)

Joiners 120°A
Code: J-120A

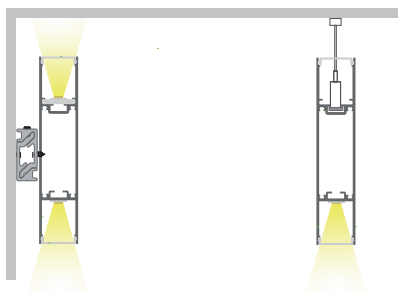

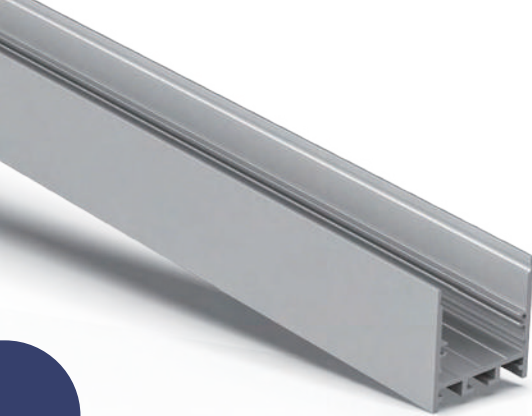


Aluminium Profile




WN35




WU35




WUH35



LW-WN35



LW-WU35



LW-WUH35

60°



Specification:

Suitable for PCB 20mm / 30mm / 30mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (WN35)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: WN35-O (Opal, light trans. >63%)
Code: WN35-N (New opal, light trans. >74%)
Code: WN35-F (Frost, light trans. >89%)
Code: WN35-C (Clear, light trans. >95%)



Black Diffuser

Code: WN31-B (Black, light trans. >22%)
MOQ: 200M



PMMA Diffuser

Code: WU35-O (Opal, light trans. >60%)






PMMA Diffuser

Code: WUH35-O (Opal, light trans. >60%)


Installing accessories:

	Aluminium Endcap (with/without hole) Code: WN35-Cap Code: WN35-Cap-H		Suspension Kits Code: Sus.KitsA
	Aluminium Endcap (without hole) Code: WU35-Cap		Wall Clips Code: WClip-WN-35
	Aluminium Endcap (without hole) Code: WUH35-Cap		Aluminium diffuser Code: WN35-AD
	Aluminum Screwless Endcap (with/without hole) Code: WN35-Cap-N		Joiners 90°A Code: J-90A
	Joiners 120°A Code: J-120A		Joiners 180°A Code: J-180A
	Metal Clip Code: MC-WN35		

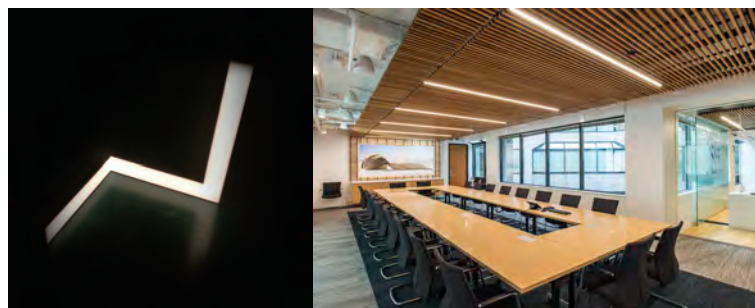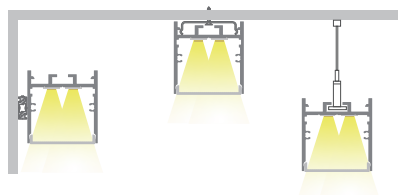


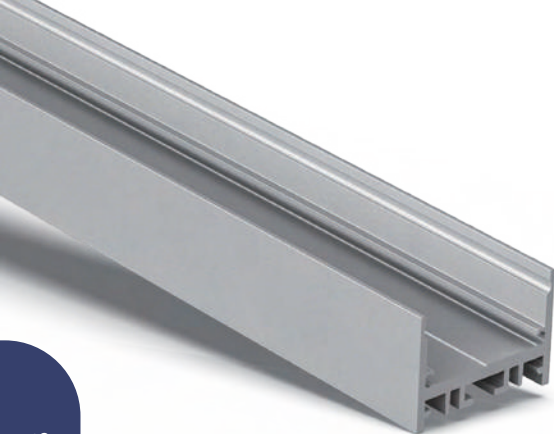


Aluminium Profile



LW-WN35-25



LW-WU35-25



LW-WUH35-25



Specification:

Suitable for PCB 30mm / 25mm / 25mm

Max. LED power: 38.4w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (WN35-25)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 35mm, (H) 25.4mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

PMMA Diffuser

Code: WN35-25-O (Opal, light trans. >63%)
 Code: WN35-25-N (New opal, light trans. >74%)
 Code: WN35-25-F (Frost, light trans. >89%)
 Code: WN35-25-C (Clear, light trans. >95%)

PMMA Diffuser


Code: WU35-25-O (Opal, light trans. >63%)


PMMA Diffuser

Code: WUH35-25-O (Opal, light trans. >60%)

Installing accessories:

	Aluminium Endcap (with/without hole) Code: WN35-25-Cap Code: WN35-25-Cap-H		Suspension Kits Code: Sus.KitsA
	Aluminium Endcap (without hole) Code: WU35-25-Cap		Metal Clip Code: MC-WN35
	Aluminium Endcap (without hole) Code: WUH35-25-Cap		Joiners 90°A Code: J-90A
	Joiners 120°A Code: J-120A		Joiners 180°A Code: J-180A

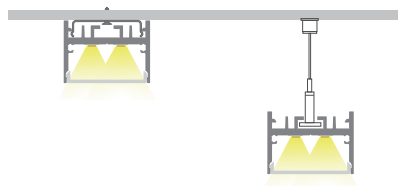

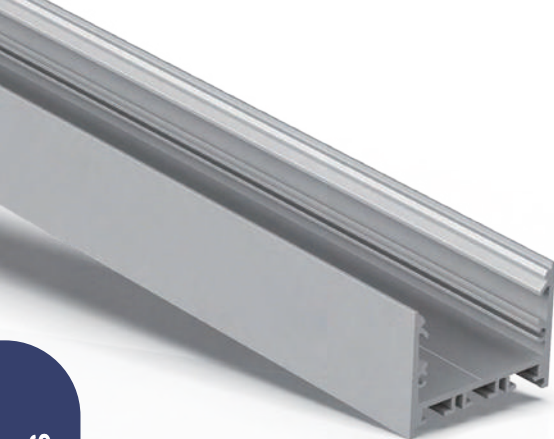


Aluminium Profile




E50



EU50



LW-E50



LW-EU50



Specification:

Suitable for PCB 40mm / 30mm

Max. LED power: 38.4w/m / 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (E50)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 50mm, (H) 37.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: E50-O (Opal, light trans. >60%)

Code: E50-N (New opal, light trans. >74%)



Black Diffuser

Code: E50-B (Black, light trans. > 22%)

MOQ: 200M



PMMA Diffuser

Code: EU50-O (Opal, light trans. >60%)

Installing accessories:



Aluminium Endcap Code: E50-Cap
(with/without hole) Code: E50-Cap-H



Suspension Kits
Code: Sus.KitsA



Aluminium Endcap Code: EU50-Cap
(with/without hole) Code: EU50-Cap-H



Wall Clips
Code: WClip



(Optional)

Screwless aluminum Cap
(with/without hole) Code: E50-Cap-N



(Optional)

Aluminium diffuser
Code: E50-AD



(Optional)

Joiners 90°A
Code: J-90A



(Optional)

Joiners 180°B
Code: J-180B




(Optional)



Joiners 120°A
Code: J-120A




(Optional)

Joiners 180°A
Code: J-180A

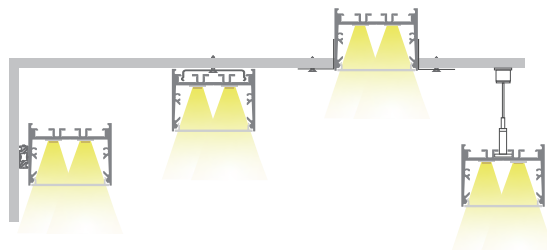

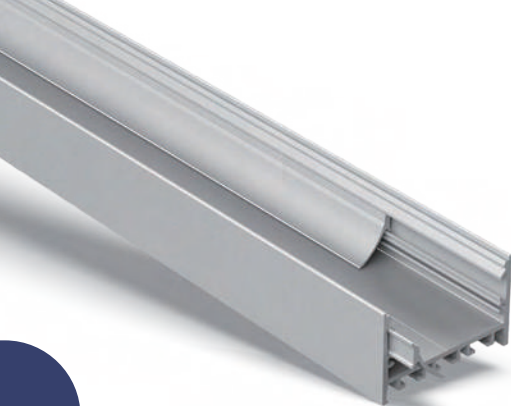

LW-E60



LW-EU60



Aluminium Profile



E60



EU60



PMMA Diffuser

Code: E60-N (New opal, light trans. >74%)



PMMA Diffuser

Code: EU60-O (Opal, light trans. >60%)

Specification:

Suitable for PCB 25mm / 45mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (E60)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 60mm, (H) 37.5mm


Driver installation: Remote driver required



* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.


Installing accessories:

	Aluminium Endcap (with/without hole) Code: E60-Cap Code: E60-Cap-H		Suspension Kits Code: Sus.KitsA
	Aluminium Endcap (with/without hole) Code: EU60-Cap Code: EU60-Cap-H		Screwless aluminum Cap (with/without hole) Code: E60-Cap-N
	Wall Clips Code: WClip-E50		Screwless aluminum Cap (with/without hole) Code: EU60-Cap-N
	Joiners 90°A Code: J-90A		Joiners 90°B Code: J-90B
	Joiners 120°A Code: J-120A		Joiners 120°B Code: J-120B
	Joiners 180°B Code: J-180B		Aluminium diffuser Code: E60-AD
	Joiners 180°A Code: J-180A		

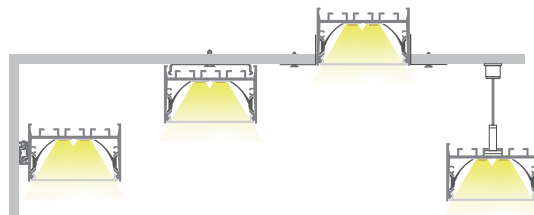

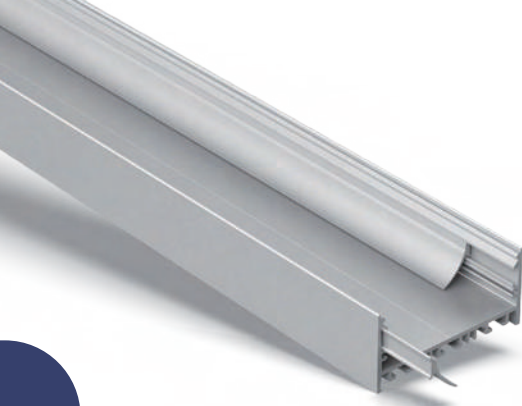

LW-E80




LW-EU80



Aluminium Profile



E80

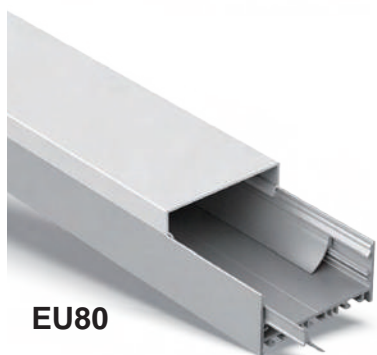

EU80



PMMA Diffuser

Code: E80-N (New opal, light trans. >74%)



PMMA Diffuser

Code: EU80-O (Opal, light trans. >60%)

Specification:

Suitable for PCB 45mm / 25mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled (E80)

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 80mm, (H) 37.5mm



Driver installation: Remote driver required


* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Installing accessories:

	Aluminium Endcap (with/without hole)	Code: E80-Cap Code: E80-Cap-H		Suspension Kits Code: Sus.KitsA
	Aluminium Endcap (with/without hole)	Code: EU80-Cap Code: EU80-Cap-H	 (Optional)	Screwless aluminum Cap (with/without hole) Code: E80-Cap-N
 (Optional)	Aluminium diffuser Code: E80-AD		 (Optional)	Screwless aluminum Cap (with/without hole) Code: EU80-Cap-N
 (Optional)	Wall Clips Code: WClip-E50		 (Optional)	Joiners 90°B Code: J-90B
 (Optional)	Joiners 90°A Code: J-90A		 (Optional)	Joiners 120°B Code: J-120B
 (Optional)	Joiners 120°A Code: J-120A		 (Optional)	Joiners 180°A Code: J-180A
 (Optional)	Joiners 180°B Code: J-180B			

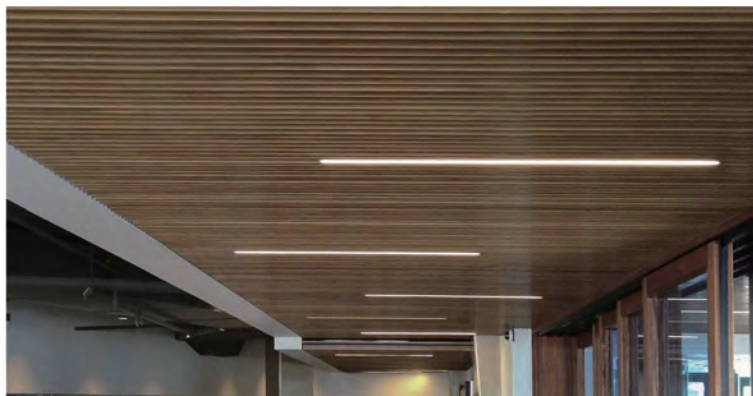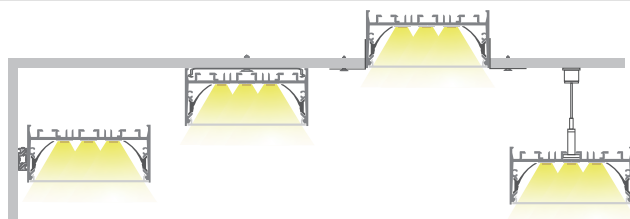



LW-E100



Aluminium Profile



E100

Specification:

Suitable for PCB 40mm

Max. LED power: 57.6w/m

Installation: Surface /Suspended

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 102mm, (H) 31mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 4000mm.



PC Diffuser

Code: E100-O (Opal, light trans. >55%)


Installing accessories:




Aluminium Endcap Code: E100-Cap
(without hole)



Suspension Kits
Code: Sus.KitsA

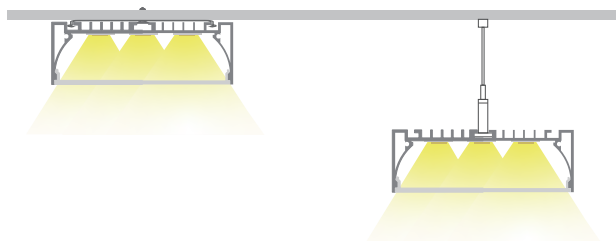



LW-W91



Aluminium Profile



W91

Specification:

Suitable for PCB	80mm
Max. LED power:	57.6w/m
Installation:	Corner Surface /Suspended
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 90mm, (H) 37.5mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	



PMMA Diffuser

Code: W91-N (New opal, light trans. >74%)



Installing accessories:



Aluminium Endcap Code: W91-Cap
(without hole)




Suspension Kits
Code: Sus.KitsA




Catalogue

- 1 SURFACE
- 3 CORNER
- 5 WATERPROOF
- 7 ROUND
- 9 DRIVER BUILT-IN PROFILE
- 11 SURFACE & SUSPENSION-ARCHITECTURAL
- 13 PLASTER IN TRIMLESS


- 2 RECESSED
- 4 SURFACE & SUSPENSION
- 6 STEP AND STAIR
- 8 WALL
- 10 TRIMLESS-ARCHITECTURAL
- 12 RECESSED-ARCHITECTURAL**
- 14 BEND & CURVED




LW-WN31
Page 170




LW-ER50
Page 172




LW-ER50-2
Page 176




LW-ER60
Page 174



LW-ER7635
Page 178



LW-AW1-50
Page 180



LW-WN31



Aluminium Profile



Specification:

Suitable for PCB	30mm
Max. LED power:	38.4w/m
Installation:	Recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 49mm, (H) 37.5mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 6000mm.	

PMMA Diffuser

- Code: WN31-O (Opal, light trans. >63%)
- Code: WN31-N (New opal, light trans. >74%)
- Code: WN31-F (Frost, light trans. >89%)
- Code: WN31-C (Clear, light trans. >95%)

Black Diffuser

- Code: WN31-B (Black, light trans. > 22%)
- MOQ: 200M

Installing accessories:



Aluminium Endcap Code: WN31-Cap
(with/without hole) Code: WN31-Cap-H



Spring Clip
Code: SC-N31



(Optional)

Joiners 180°A
Code: J-180A




(Optional)


Joiners 90°A
Code: J-90A



(Optional)

Joiners 120°A
Code: J-120A

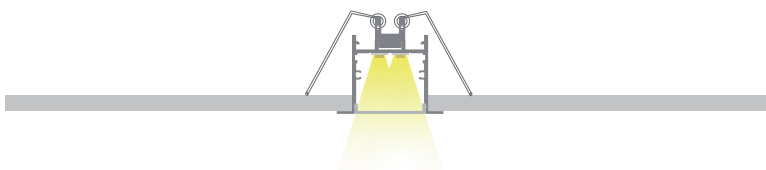



LW-ER50



Specification:

Suitable for PCB 45mm

Max. LED power: 57.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 63.9mm, (H) 45mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 5000mm.

Aluminium Profile



ER50




PMMA Diffuser

Code: ER50-O (Opal, light trans. >60%)

Code: ER50-N (New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap Code: ER50-Cap
(with/without hole) Code: ER50-Cap-H



Spring Clip
Code: SC-ER50




Joiners 90°A
Code: J-90A




Joiners 180°A
Code: J-180A



Joiners 120°A
Code: J-120A

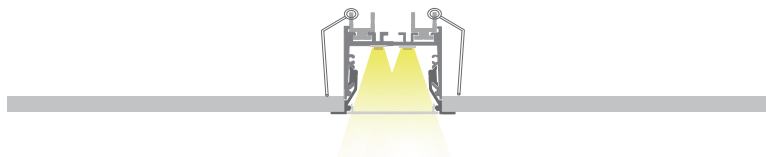


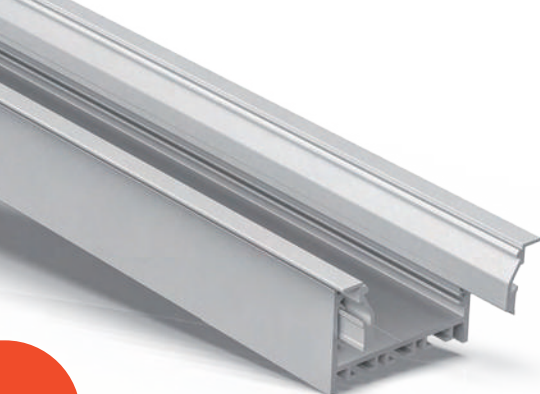

Aluminium Profile



ER60



LW-ER60



Specification:

Suitable for PCB	38mm
Max. LED power:	57.6w/m
Installation:	Recessed
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 73.9mm, (H) 45mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 5000mm.	



PMMA Diffuser

Code: ER60-N (New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap Code: ER60-Cap
(with/without hole) Code: ER60-Cap-H



Spring Clip
Code: SC-ER50



Joiners 90°A
Code: J-90A



Joiners 90°B
Code: J-90B




Joiners 120°A
Code: J-120A





Joiners 180°A
Code: J-180A



Joiners 120°B
Code: J-120B

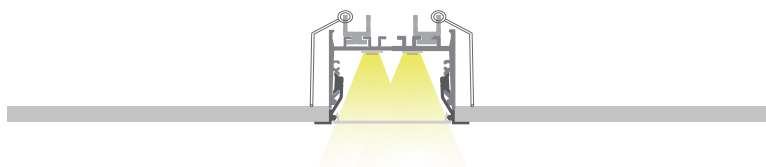

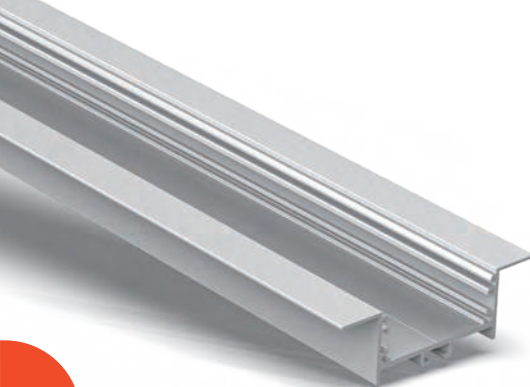

LW-ER50-2



Aluminium Profile



ER50-2

Specification:

Suitable for PCB 50mm

Max. LED power: 38.4w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 80mm, (H) 25mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PMMA Diffuser

Code: ER50-2-O (Opal, light trans. >60%)

Code: ER50-2-N (New opal, light trans. >74%)

Installing accessories:



Aluminium Endcap Code: ER50-2-Cap
(with/without hole) Code: ER50-2-Cap-H



Spring Clip
Code: SC-WN31




Joiners 90°A
Code: J-90A




Joiners 180°A
Code: J-180A



Joiners 120°A
Code: J-120A

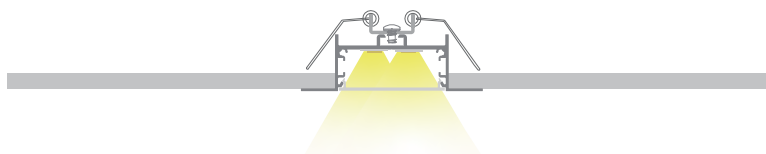



LW-ER7635



Aluminium Profile



ER7635

Specification:

Suitable for PCB 55mm

Max. LED power: 57.6w/m

Installation: Recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 91mm, (H) 35mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.



PC Diffuser

Code: ER7635-O (Opal, light trans. >55%)


Installing accessories:




Aluminium Endcap Code: ER7635-Cap
(without hole)



Spring Clip
Code: SC-ER7635

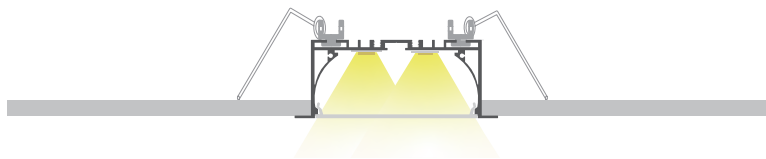



LW-AW1-50



Specification:

Suitable for PCB	14mm
Max. LED power:	19.2w/m
Installation:	Wall flush
Material:	Extruded Aluminium 6063
Finish:	Silver anodised, Black or White *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 19.5mm, (H) 50mm
Driver installation:	Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



AW1-50



PMMA Diffuser

Code: AW1-50-O (Opal, light trans. >52%)
 Code: AW1-50-M (Milky, light trans. >65%)
 Code: AW1-50-F (Frost, light trans. >81%)
 Code: AW1-50-C (Clear, light trans. >95%)

PC Diffuser

Code: AW1-50-O (Opal, light trans. >52%)


Installing accessories:



Aluminium Endcap Code: AW1-50-Cap
(without hole)




Spring Clip Code: SC-N31-4




Catalogue


1	SURFACE	2	RECESSED
3	CORNER	4	SURFACE & SUSPENSION
5	WATERPROOF	6	STEP AND STAIR
7	ROUND	8	WALL
9	DRIVER BUILT-IN PROFILE	10	TRIMLESS-ARCHITECTURAL
11	SURFACE & SUSPENSION-ARCHITECTURAL	12	RECESSED-ARCHITECTURAL
13	<i>PLASTER IN TRIMLESS</i>	14	BEND & CURVED




LW-CT4N
Page 184




LW-CT5
Page 186




LW-CT5S
Page 188




LW-CT6
Page 190




LW-CT7
Page 192





LW-CT8
Page 194



LW--CT9
Page 196




LW-CTW1
Page 198

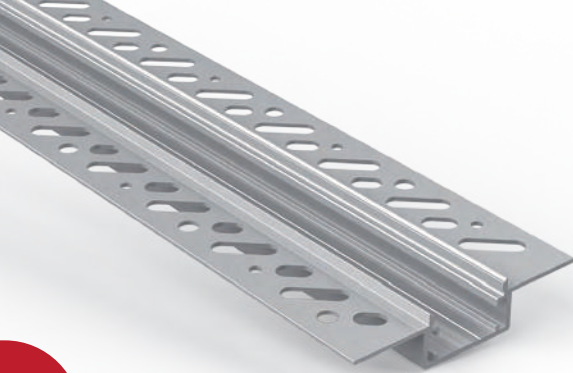

LW-CT4N



Aluminium Profile

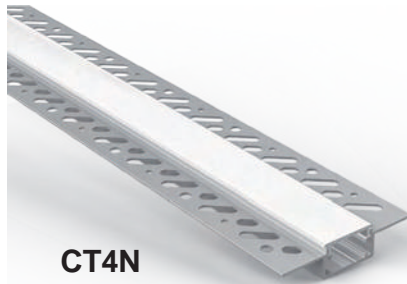

CT4N

Specification:

Suitable for PCB	16mm
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 66.4mm, (H) 16.4mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 2500mm.	






PMMA Diffuser

Code: CT4N-O (Opal, light trans. >52%)

Installing accessories:

	Plastic Endcap (with/without hole)	Code: CT4N-Cap Code: CT4N-Cap-H		Joiners 90°B Code: J-90B
	Joiners 90°A Code: J-90A			Joiners 120°B Code: J-120B
	Joiners 120°A Code: J-120A			Joiners 180°A Code: J-180A



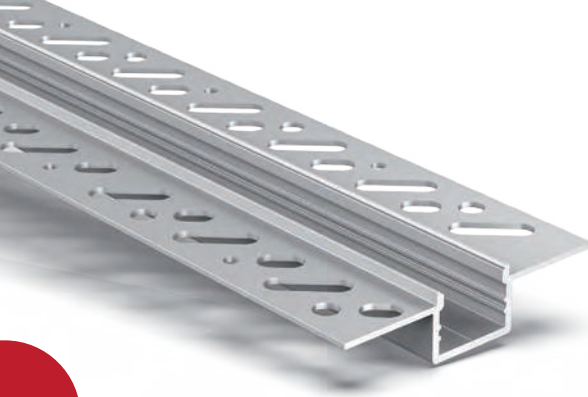

LW-CT5



Specification:

Suitable for PCB	16mm
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 59mm, (H) 13.6mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 2500mm.	

Aluminium Profile



CT5



PMMA Diffuser

Code: CT5-O (Opal, light trans. >52%)




Black Diffuser



Code:CT5-B (Black, light trans. > 22%)
MOQ: 200M

Installing accessories:



Plastic Endcap Code: CT5-Cap
(with/without hole) Code: CT5-Cap-H

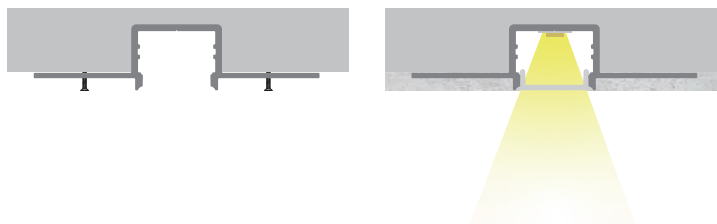

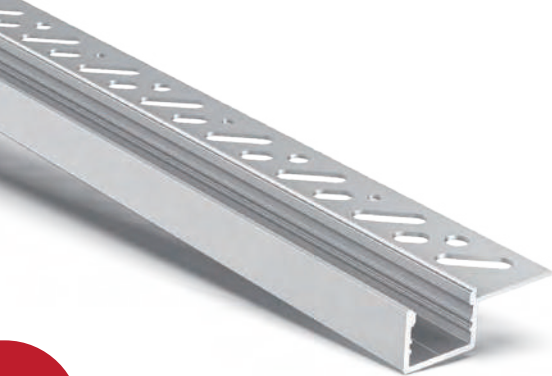

LW-CT5S



Specification:

Suitable for PCB 16mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 38.8mm, (H) 13.6mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Aluminium Profile



CT5S





PMMA Diffuser



Code: CT5S-O (Opal, light trans. > 52%)

Installing accessories:



Plastic Endcap Code: CT5-Cap
(with/without hole) Code: CT5-Cap-H

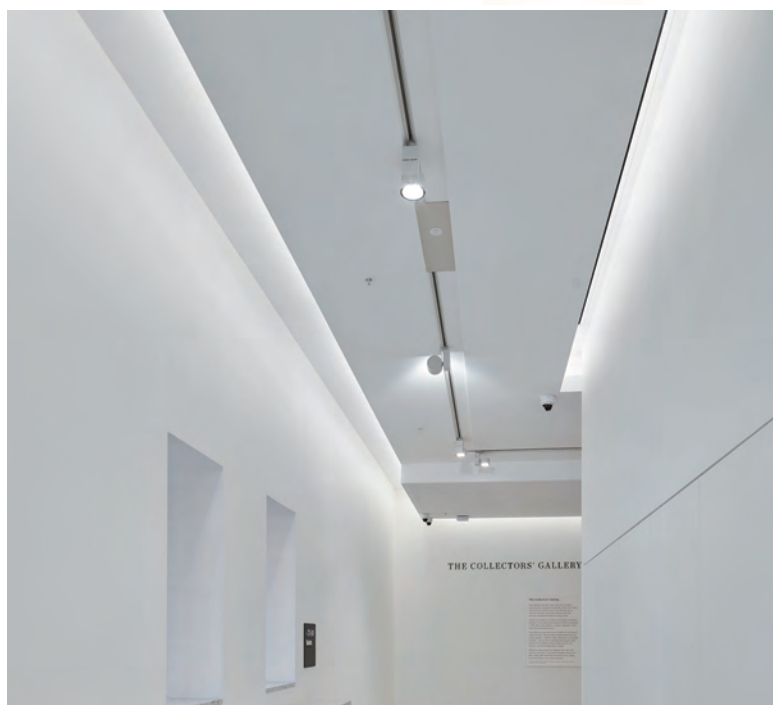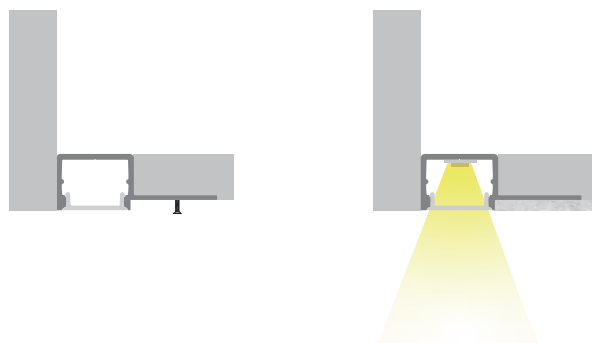

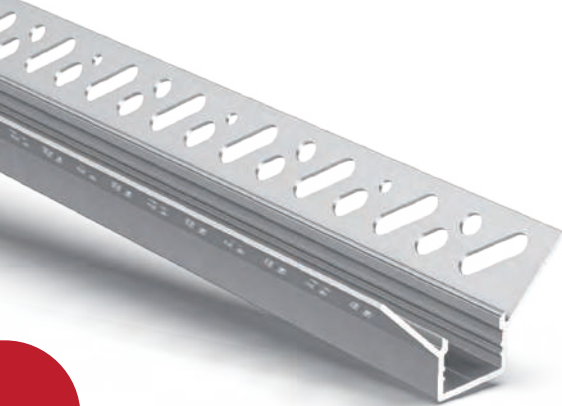

LW-CT6



Specification:

Suitable for PCB	16mm
Max. LED power:	19.2w/m
Installation:	Plaster in Trimless, Inside corner
Material:	Extruded Aluminium 6063
Finish:	Silver anodised *
Diffuser:	PMMA flexible diffuser, can be 25m continuous rolled
Length:	2000mm or 2500mm continuous **
Size:	Profile (W) 49.8mm, (H) 26.1mm
Driver installation:	Remote driver required
* Custom powder coated colour upon request. Surcharge apply.	
** Profile sold per metre. Can be cut to suit any length up to 2500mm.	

Aluminium Profile



CT6



PMMA Diffuser

Code: CT6-O (Opal, light trans. >52%)






Black Diffuser


Code:CT5-B (Black, light trans. > 22%)
MOQ: 200M

Installing accessories:



Plastic Endcap Code: CT5-Cap
(with/without hole) Code: CT5-Cap-H

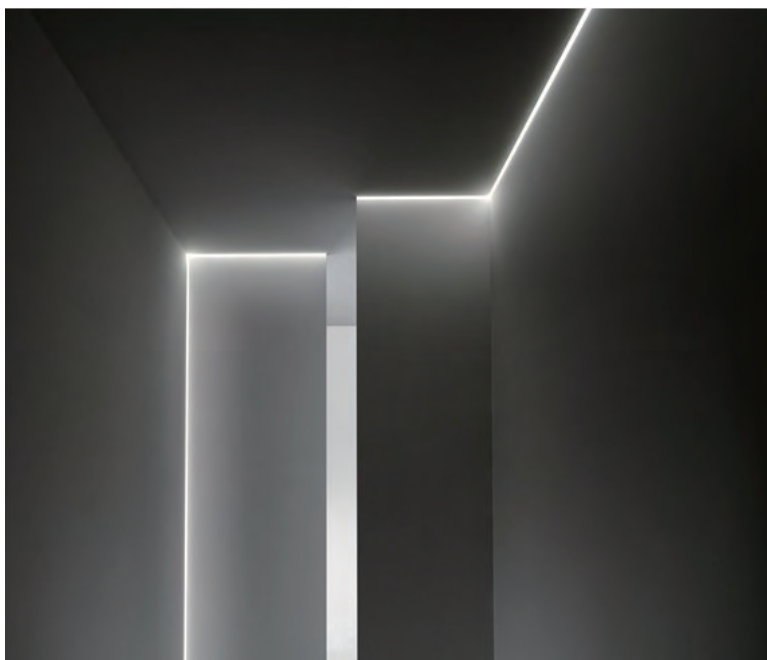



LW-CT7



Specification:

Suitable for PCB 16mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless, Dutside corner

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 56.6mm, (H) 23.7mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.

Aluminium Profile



CT7



PMMA Diffuser

Code: CT7-O (Opal, light trans. >52%)



Black Diffuser



Code:CT5-B (Black, light trans. > 22%)


MOQ: 200M

Installing accessories:



Plastic Endcap Code: CT5-Cap
(with/without hole) Code: CT5-Cap-H

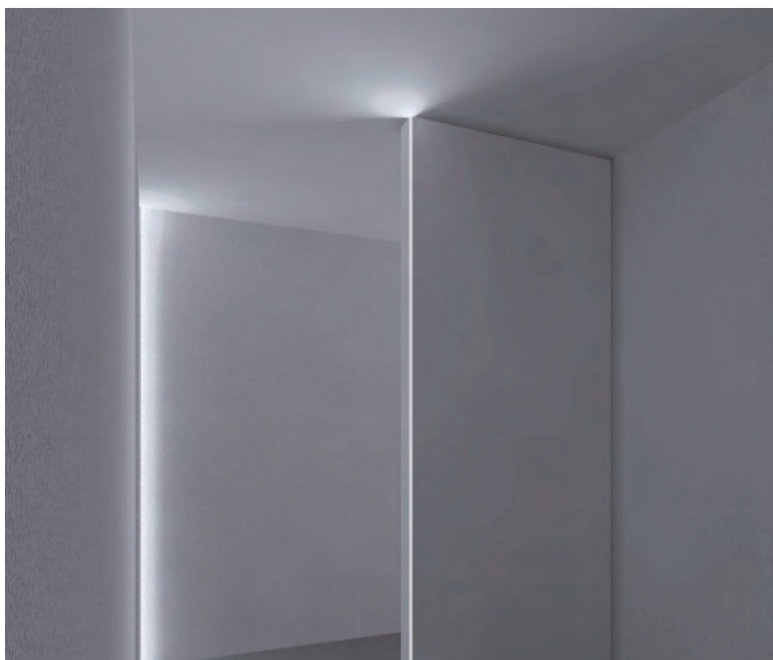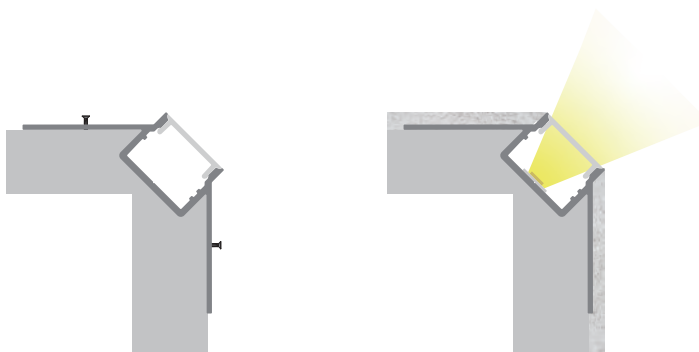



LW-CT8



Aluminium Profile



CT8

Specification:

Suitable for PCB 10mm

Max. LED power: 19.2w/m

Installation: Plaster in Trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 42.5mm, (H) 28.5mm

Driver installation: Remote driver required



* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.



PMMA Diffuser

Code: CT8-O (Opal, light trans. >52%)

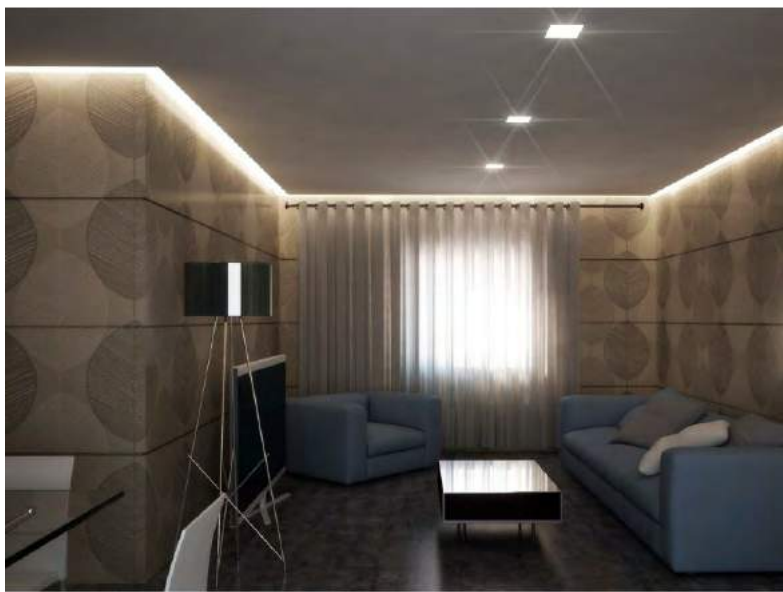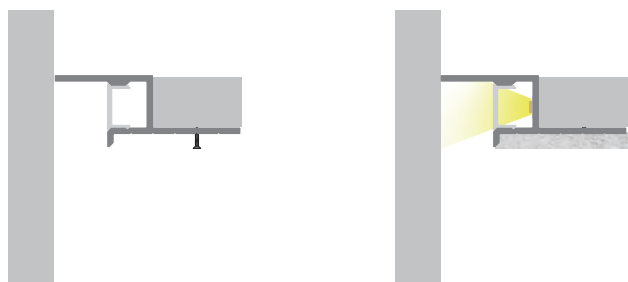




Aluminium Profile



CT9



LW-CT9



Specification:

Suitable for PCB 5mm

Max. LED power: 9.6w/m

Installation: Plaster in Trimless

Material: Extruded Aluminium 6063

Finish: Silver anodised *

Diffuser: PC flexible diffuser

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 28mm, (H) 9mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 2500mm.



PC Diffuser

Code: CT9-O (Opal, light trans. >50%)


Code: CT9-C (Clear, light trans. >94%)

Installing accessories:



Plastic Endcap Code: AS9-Cap
(with/without hole) Code: AS9-Cap-H





LW-CTW1

100°



Specification:

Suitable for PCB 15mm

Max. LED power: 14.4w/m

Installation: Wall/Ceiling recessed

Material: Extruded Aluminium 6063

Finish: Silver anodised, white coated *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 86.6mm, (H) 16mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 6000mm.

Aluminium Profile



CTW1

PMMA Diffuser

Code: AW1-O (Opal, light trans. >52%)

Code: AW1-M (Milky, light trans. >65%)

Code: AW1-F (Frost, light trans. >81%)

Code: AW1-C (Clear, light trans. >95%)

PC Diffuser



Code: AW1-O (Opal, light trans. >52%)



Installing accessories:




Bolt
Code: CTW1

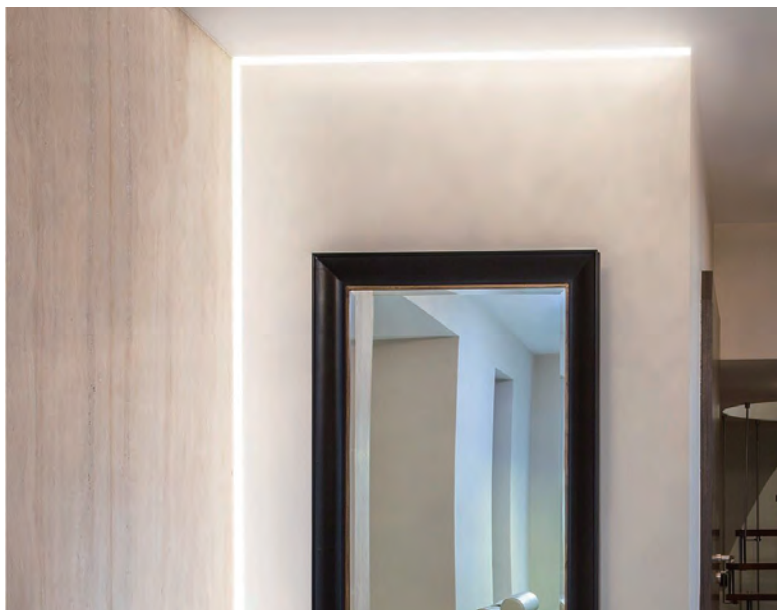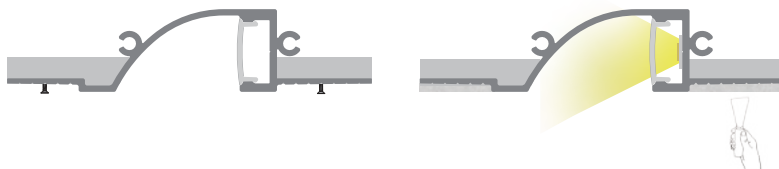



Catalogue

- | | | | |
|----|------------------------------------|----|---------------------------------|
| 1 | SURFACE | 2 | RECESSED |
| 3 | CORNER | 4 | SURFACE & SUSPENSION |
| 5 | WATERPROOF | 6 | STEP AND STAIR |
| 7 | ROUND | 8 | WALL |
| 9 | DRIVER BUILT-IN PROFILE | 10 | TRIMLESS-ARCHITECTURAL |
| 11 | SURFACE & SUSPENSION-ARCHITECTURAL | 12 | RECESSED-ARCHITECTURAL |
| 13 | PLASTER IN TRIMLESS | 14 | <i>BEND & CURVED</i> |




LW-B1


Page 202

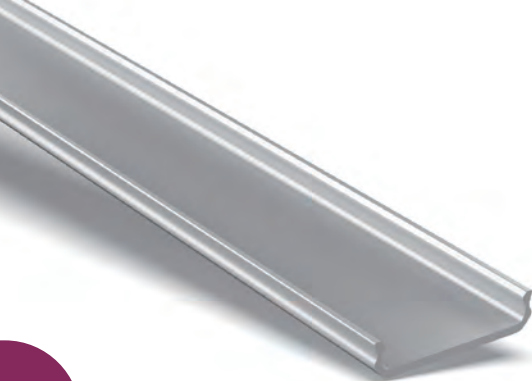

LW-B1



Aluminium Profile

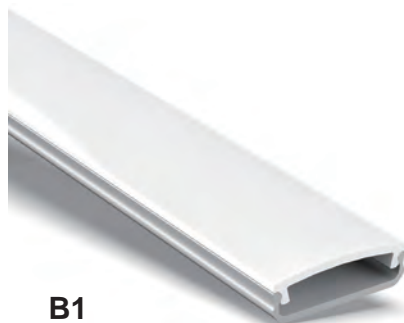

B1




Bending tool



PMMA Diffuser

Code: B1-O (Opal, light trans. >68%)

Code: B1-F (Frost, light trans. >83%)

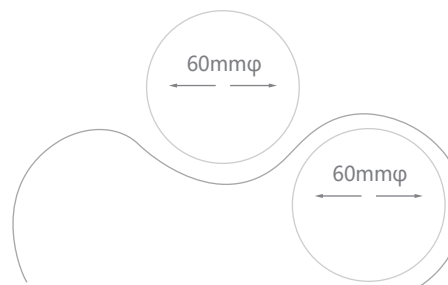

Specification:

Suitable for PCB 15mm

Max. LED power: 14.4w/m

Installation: Surface

Material: Extruded Aluminium 6063

Finish: Silver anodised, Black or White *

Diffuser: PMMA flexible diffuser, can be 25m continuous rolled

Length: 2000mm or 2500mm continuous **

Size: Profile (W) 19.4mm, (H) 6.5mm

Driver installation: Remote driver required

* Custom powder coated colour upon request. Surcharge apply.

** Profile sold per metre. Can be cut to suit any length up to 3000mm.



Installing accessories:











Aluminium Endcap Code: B1-Cap
(with/without hole) Code: B1-Cap-H




Metal Clip
Code: AT11-Clip-M

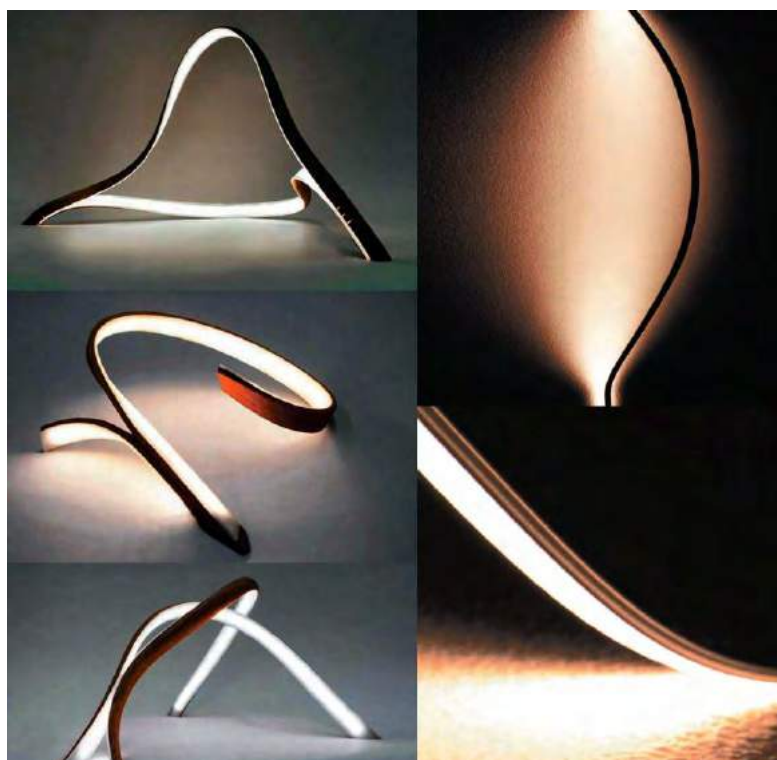





Product Code: LW-RF
Product Name: 18A RF Wireless Touch RGB controller



Product Code: LW-DD
Product Name: Dimmer Adjustable Brightness Controller



Product Code: LW-TD
Product Name: Touch LED Dimmer Controller



Product Code: LW-MC
Product Name: Mini Controller Light Strip Controller



Product Code: LW-DIM
Product Name: DIM Brightness Dimming For Single Color LED Strip



Product Code: LW-CCT
Product Name: CCT Brightness Dimming For Dual White LED Strip



Product Code: LW-C-RGB
Product Name: RGB Brightness Dimming For RGB LED strip 3 Color



Product Code: LW-C-RGBW
Product Name: Brightness Dimming & RGB+W/WW Color Changing



Product Code: LW-D4
Product Name: Decoder LED Controller 4 Channel Driver



Product Code: LW-SC-DCV
Product Name: DALI&PUSH DIM CV 10-360W Dimmable LED driver
 Output Power: 10-360W



Product Code: LW-SC-DCC
Product Name: DALI CC 10W-200W Dimmable LED driver
 Output Power: 10-200W



Product Code: LW-SC-10CV
Product name: 0/1-10V CV 10-360W Dimmable LED driver
 Output Power: 10-360W



Product Code: LW-SC-10CC
Product Name: 0-10V.1-10V CC 10-200W Dimmable LED driver
 Output Power: 10-200W



Product Code: LW-SC-TCV1
Product Name: TRIAC CV 100-277V Dimmable LED driver
 Output Power: 30-300W



Product Code: LW-SC-TCV2
Product Name: TRIAC CV 200-240V Dimmable LED driver
 Output Power: 30-360W



Product Code: LW-HLD
Product Name: HuaLiang LED drivers
 Output Power: 12-300W



Product Code: LW-MW-HLG

Product Name: Meanwell HLG series LED Driver

Output Power: 40/60/80/100/120/150/185/240/320/480/600W



Product Code: LW-MW-APV

Product Name: Meanwell APV series LED Driver

Output Power: 8/12/16/25/35W



Product Code: LW-MW-ELG

Product Name: Meanwell ELG series

Output Power: 75/100/150/200/240W



Product Code: LW-MW-LPV

Product Name: Meanwell LPV series

Output Power: 20/35/60/100/150W












Product Code: LW-MW-LPF

Product Name: Meanwell LPF series

Output Power: 16/25/40/60/90W

Ledwide Product Applications from our customers

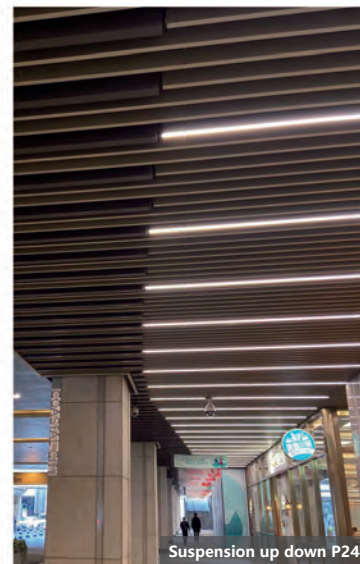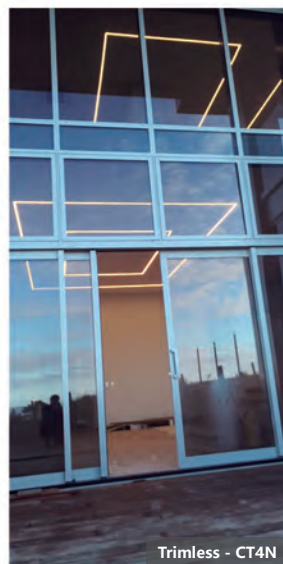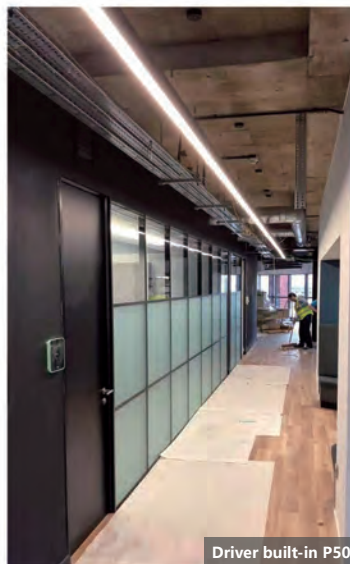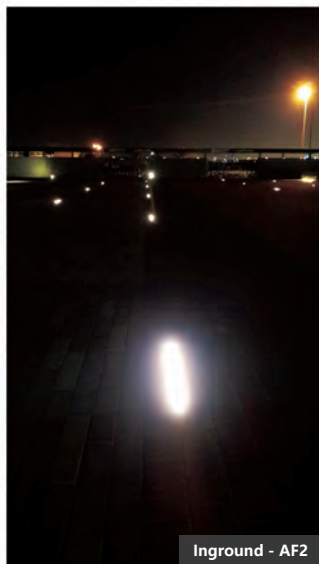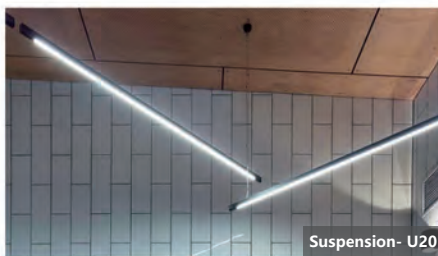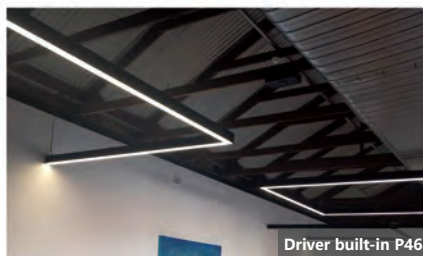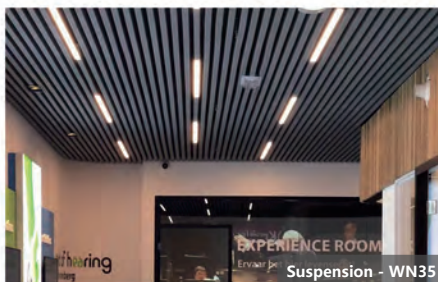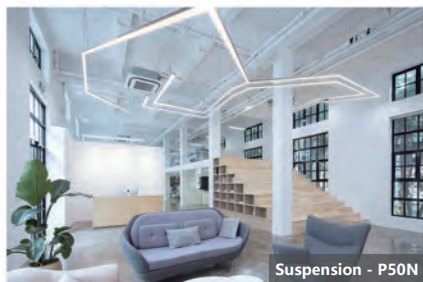

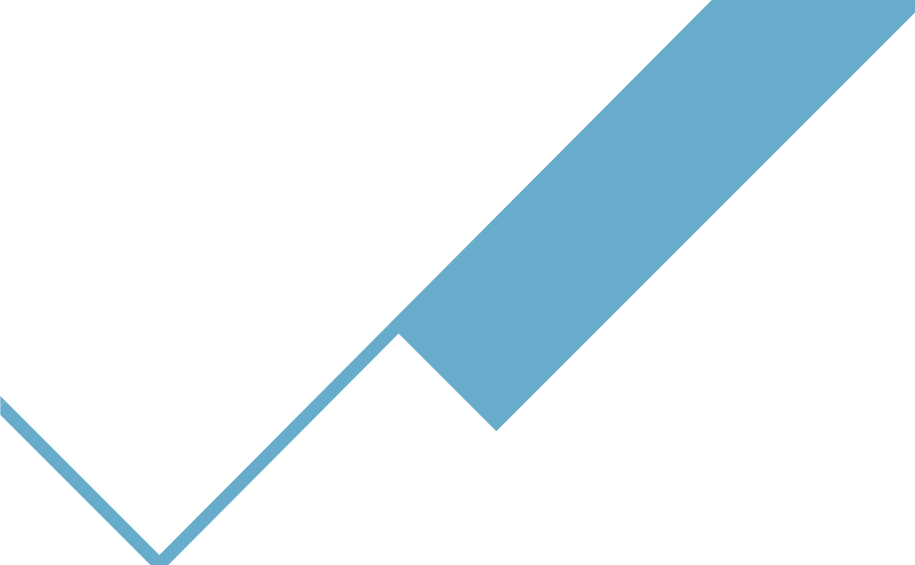

CONTACT US

ADDRESS : 1-2/F, Building A2, Sinopol Ind. Park,
BaiHua Communities, Guangming
District, Shenzhen, P.R. China

POSTCODE : 518107

PHONE : 0086 755 29362351

FAX : 0086 755 29014058

EMAIL : info@ledwide.com

WEBSITE : www.ledwide.com