

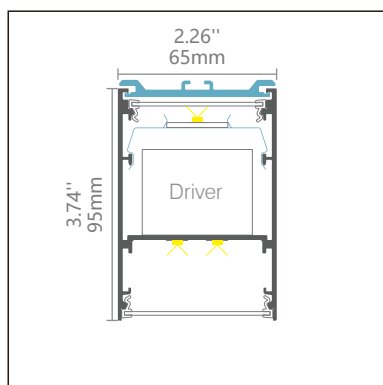
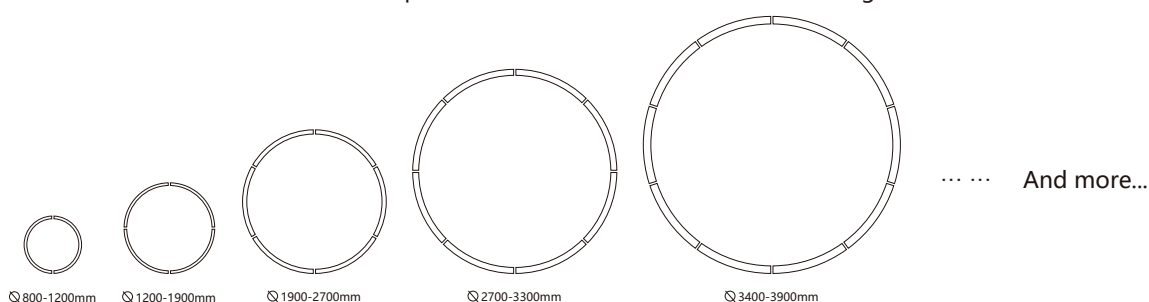


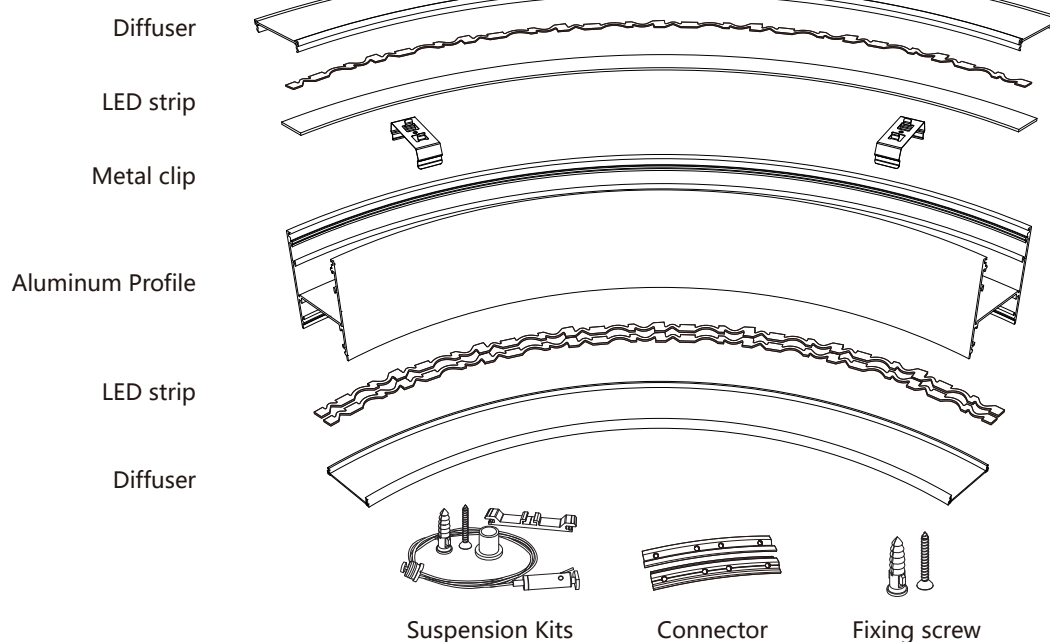

Led curved lighting profile system w65mm x h95mm

LW-CX65H

Can Customize any size with outer Radius >400mm
smallest outer R=400mm

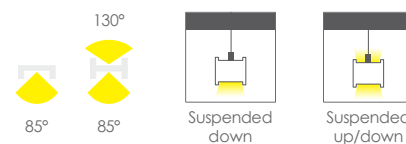


Diameter range / mm	800-1200	1200-1500	1500-1900	1900-2700	2700-3000	3000-3300	Customized
Parts of profile	2	4	4	6	8	8	TBC
Parts of diffuser	2	2	4	4	4	6	TBC

Name	Code	Material	Color	Others
Aluminum Profile	CX65H	Aluminum	Non anodized / White / Black / RAL color	-
LED strip	-	-	-	MAX. 43.2 W/m
Suspension Kits	Sus. Kits CX65H	Stainless Steel	ecru	-
Connector	-	Stainless Steel	ecru	-


Optional Diffuser (PMMA)

Color	Light Transmittance	Code	Max. Length
New opal	80%	CX65H-N	2.4M




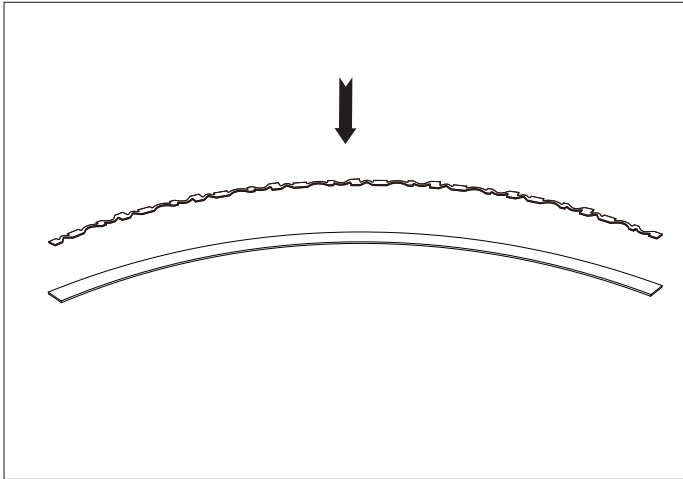


1. Stick on the LED strip.

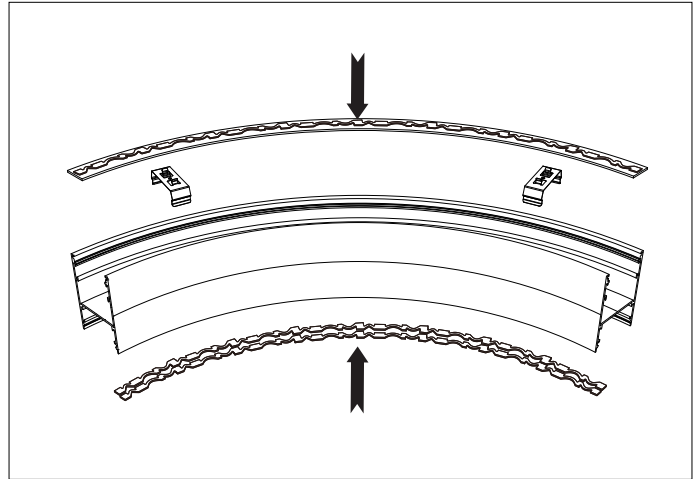


2. Install light panel and LED strips.

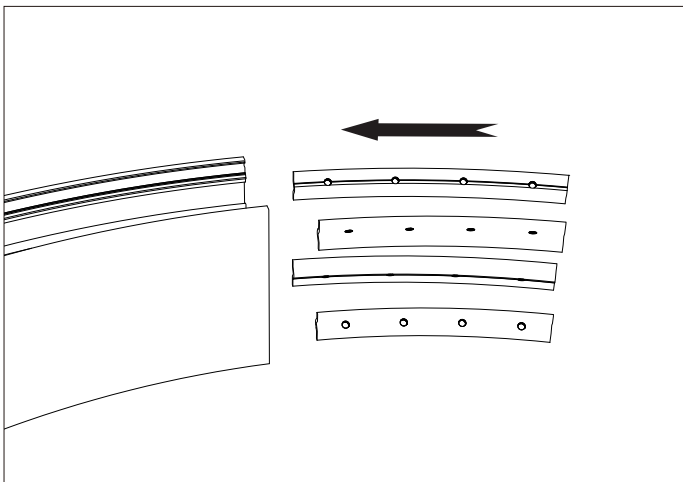


3. Install the joiners.

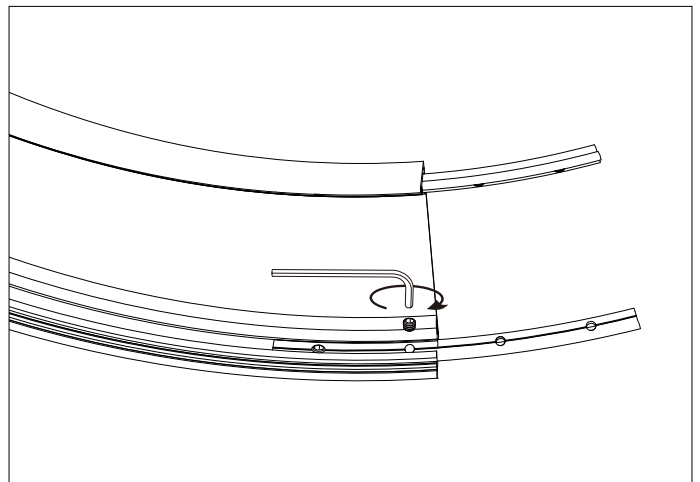


4. Lock the hexagon screws.

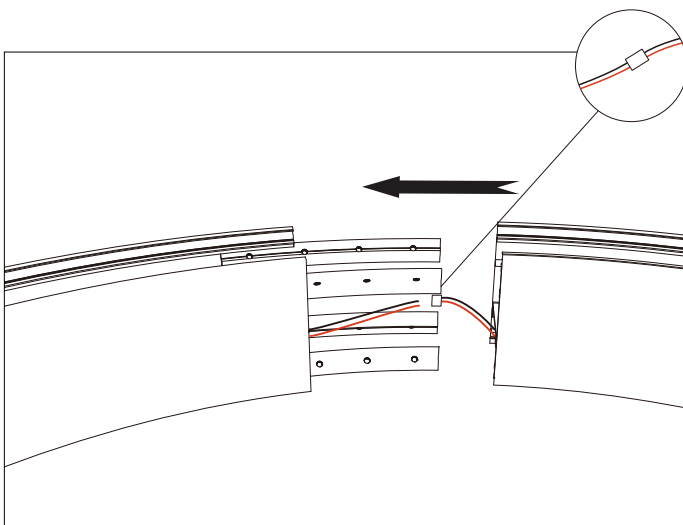


5. Connect the power wires and profiles.

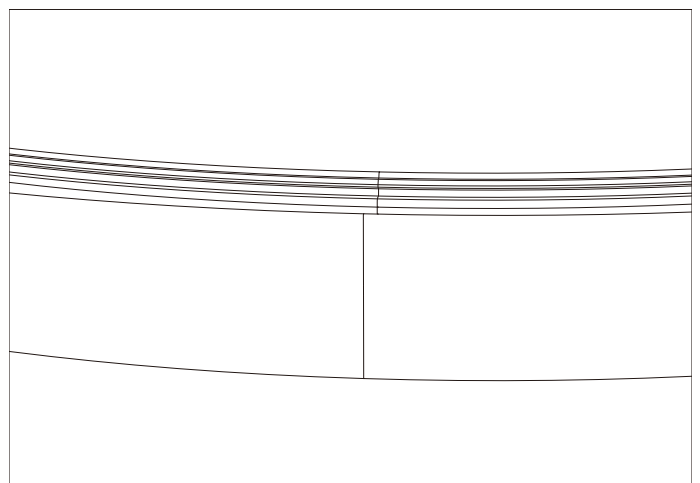


6. Connection finished.

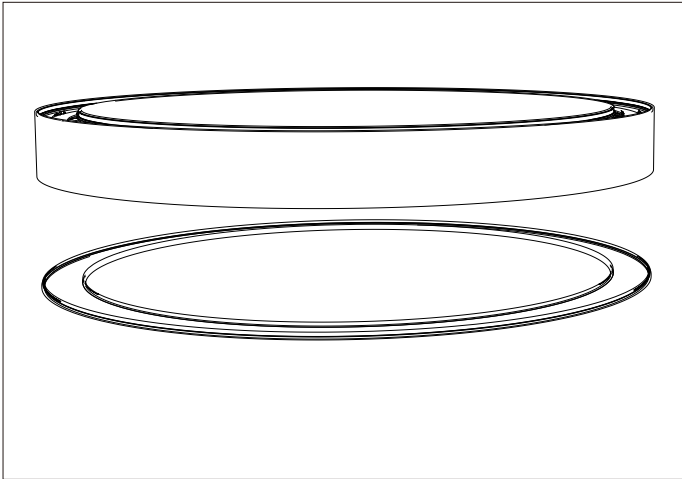


7. Install the up diffuser.

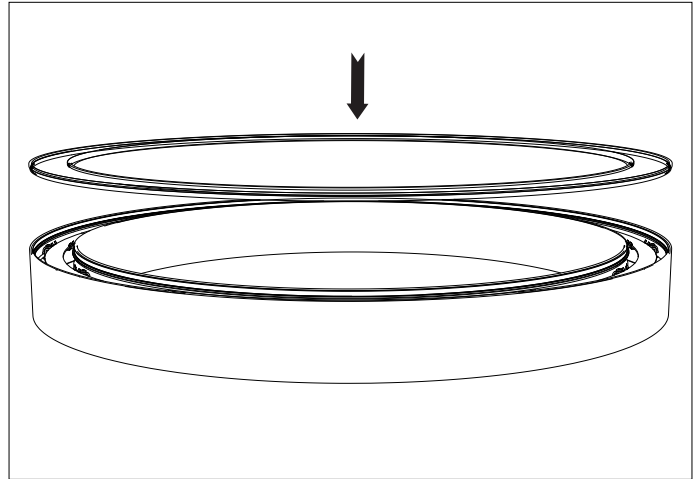


8. Install the down diffuser.

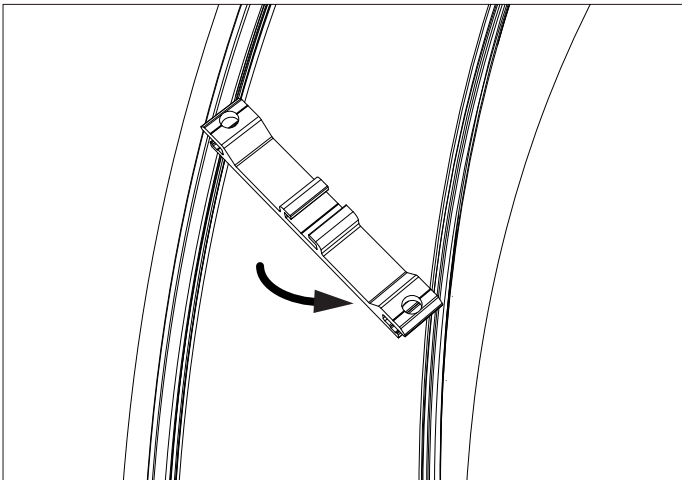


9. Mount the suspension bases.

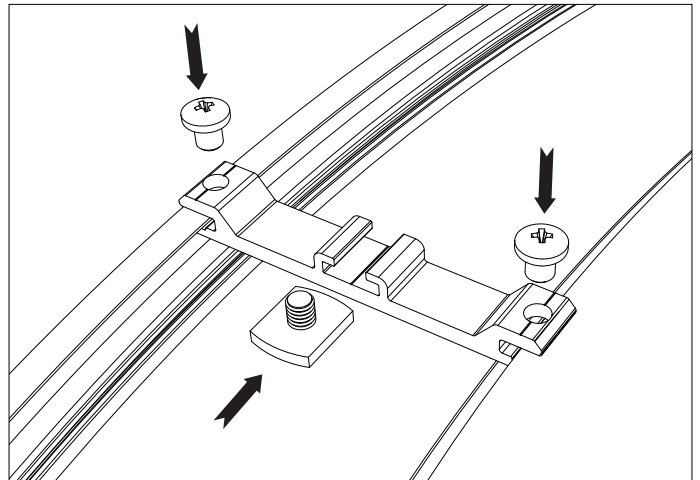

10. install the suspension kits.

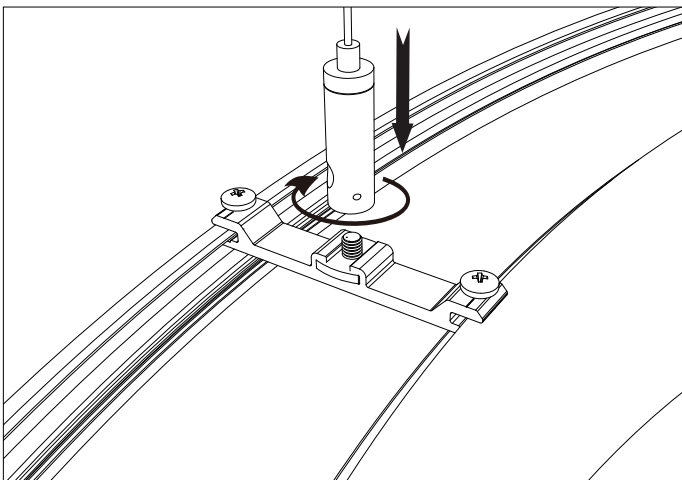

11. Lock the screws properly.

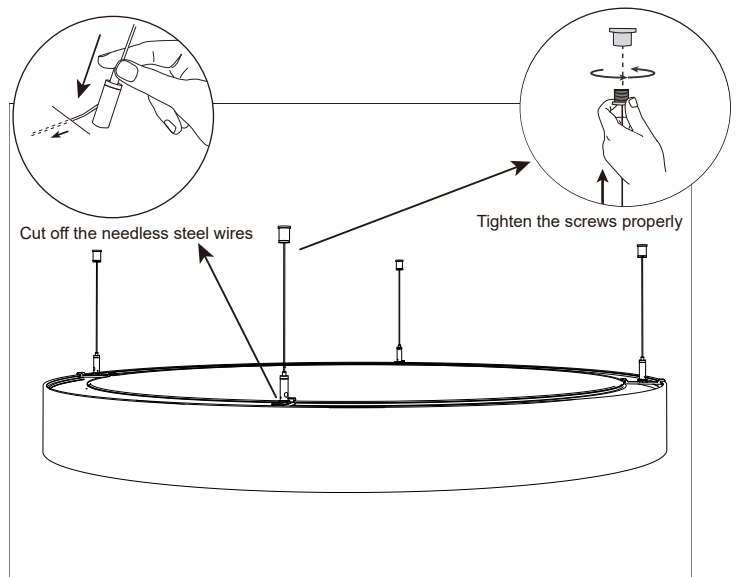

12. Connection finished.

