
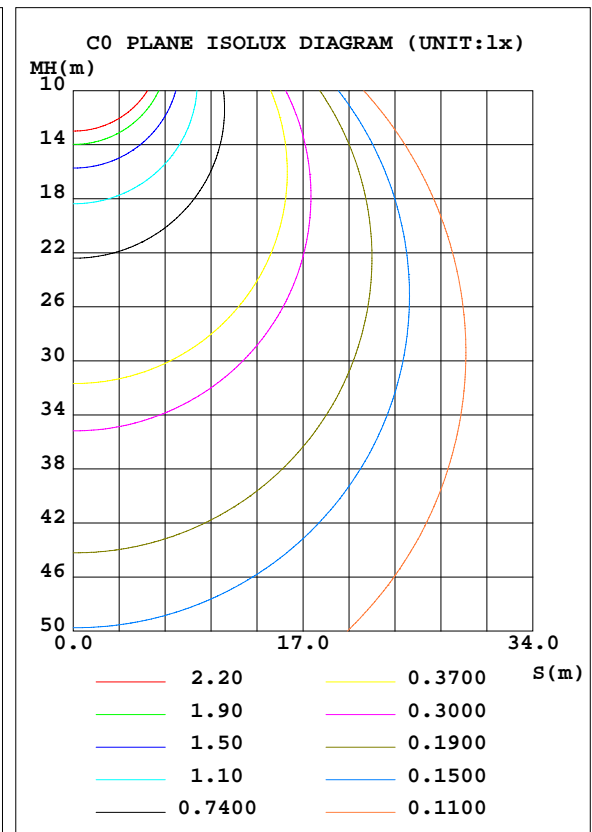


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 91.42 lm/W			
MODEL		I _{max} (cd)	372.6	S/MH(C0/180)	1.29
NOMINAL POWER(W)	13.58	LOR(%)	100.0	S/MH(C90/270)	1.35
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1248.8	η UP, DN(C0-180)	0.9,49.1
NOMINAL FLUX(lm)	1248.83	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.9,49.1
LAMPS INSIDE	1	η up(%)	1.8	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	η down(%)	98.2	CIBSE SHR MAX	1.55

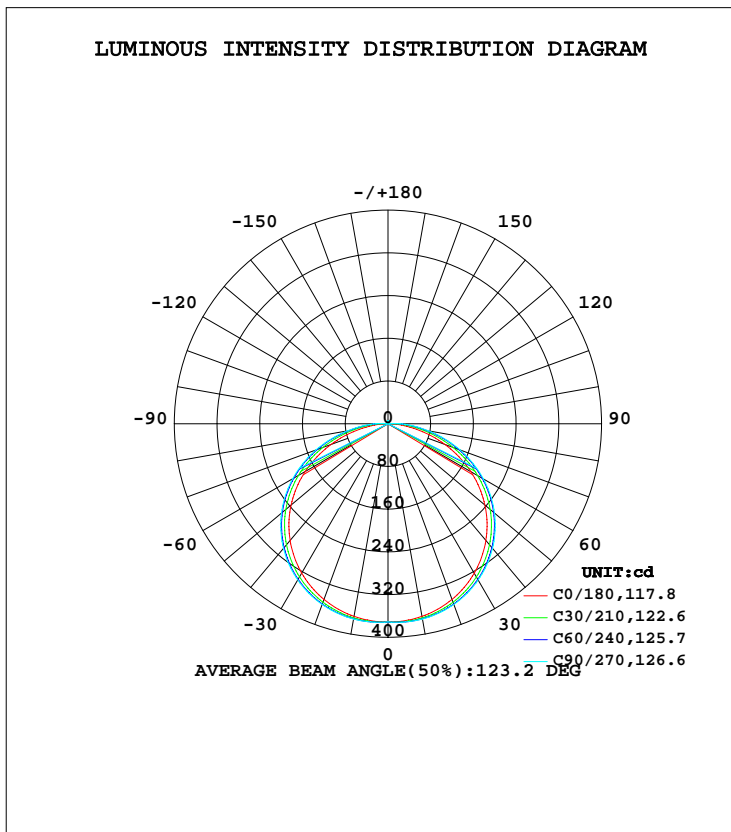

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	366.3	370.2	371.3	370.2	366.3	370.2	371.3	370.2	0- 10	35.43	35.43	2.84,2.84
20	350.2	357.9	360.3	357.9	350.2	357.9	360.3	357.9	10- 20	103.1	138.5	11.1,11.1
30	323.2	334.7	337.9	334.7	323.2	334.7	337.9	334.7	20- 30	159.8	298.3	23.9,23.9
40	285.3	300.3	304.5	300.3	285.3	300.3	304.5	300.3	30- 40	198.4	496.7	39.8,39.8
50	237.0	255.1	260.4	255.1	237.0	255.1	260.4	255.1	40- 50	213.5	710.2	56.9,56.9
60	179.0	200.1	206.1	200.1	179.0	200.1	206.1	200.1	50- 60	202.1	912.3	73.1,73.1
70	113.4	136.7	143.5	136.7	113.4	136.7	143.5	136.7	60- 70	164.2	1077	86.2,86.2
80	48.10	70.69	77.27	70.69	48.10	70.69	77.27	70.69	70- 80	105.9	1183	94.7,94.7
90	1.710	18.97	22.67	18.97	1.710	18.97	22.67	18.97	80- 90	43.72	1226	98.2,98.2
100	1.101	1.476	1.820	1.476	1.101	1.476	1.820	1.476	90-100	6.852	1233	98.7,98.7
110	1.992	1.642	1.499	1.642	1.992	1.642	1.499	1.642	100-110	1.433	1235	98.9,98.9
120	2.775	2.518	2.368	2.518	2.775	2.518	2.368	2.518	110-120	2.071	1237	99,99
130	3.361	3.323	3.165	3.323	3.361	3.323	3.165	3.323	120-130	2.610	1239	99.2,99.2
140	3.799	4.058	3.838	4.058	3.799	4.058	3.838	4.058	130-140	2.809	1242	99.5,99.5
150	4.244	4.628	4.284	4.628	4.244	4.628	4.284	4.628	140-150	2.649	1245	99.7,99.7
160	4.729	5.058	4.885	5.058	4.729	5.058	4.885	5.058	150-160	2.179	1247	99.8,99.8
170	5.284	5.488	5.394	5.488	5.284	5.488	5.394	5.488	160-170	1.456	1248	100,100
180	5.902	6.012	6.293	6.012	5.902	6.012	6.293	6.012	170-180	0.5363	1249	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 603.21 lm

%lum = 48.3%
%lamp = 48.3%

Conical surface Flux(120deg): 912.34 lm


%lum = 73.1%
%lamp = 73.1%

C Range: 0 - 90DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-01-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:12.226m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

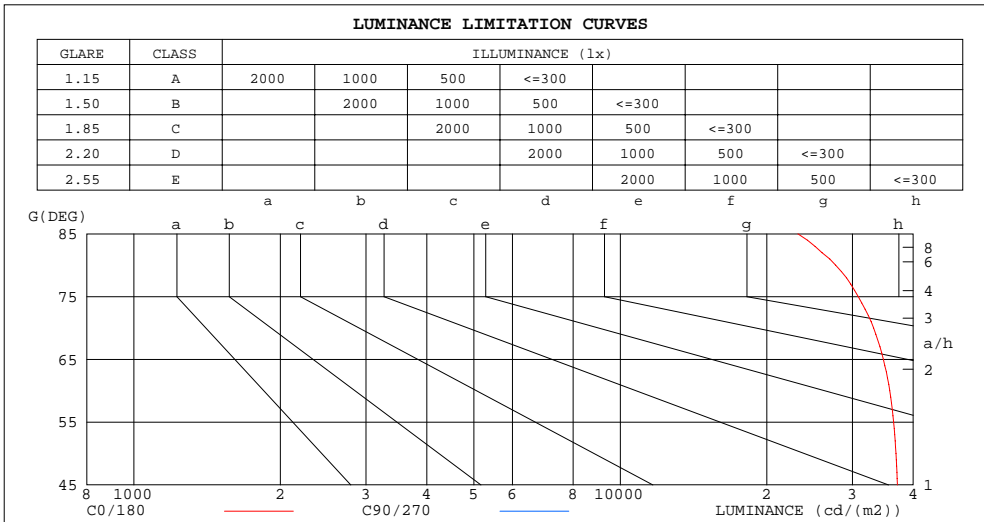

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	23177	54030
80	27702	44500
75	30823	42597
70	33153	41957
65	34721	41588
60	35794	41226
55	36452	40882
50	36873	40515
45	37115	40120

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.338	.192	.061	.331	.189	.060	.316	.181	.058	.303	.175	.056	.291	.169	.054	
2.0	.311	.170	.052	.304	.167	.052	.291	.162	.050	.279	.157	.049	.268	.152	.048	
3.0	.284	.151	.045	.278	.149	.045	.266	.144	.044	.256	.140	.043	.246	.136	.042	
4.0	.260	.135	.040	.254	.133	.039	.244	.129	.039	.235	.126	.038	.226	.123	.037	
5.0	.239	.122	.035	.234	.120	.035	.225	.117	.034	.216	.114	.034	.208	.111	.033	
6.0	.220	.110	.032	.216	.109	.031	.208	.106	.031	.200	.104	.031	.193	.102	.030	
7.0	.204	.101	.029	.200	.100	.028	.193	.098	.028	.186	.095	.028	.180	.093	.027	
8.0	.190	.093	.026	.187	.092	.026	.180	.090	.026	.174	.088	.025	.168	.086	.025	
9.0	.178	.086	.024	.175	.085	.024	.169	.083	.024	.163	.082	.023	.158	.080	.023	
10.0	.167	.080	.022	.164	.079	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.175	.175	.175	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.196	.170	.146	.168	.146	.126	.115	.100	.087	.066	.058	.051	.021	.019	.016	
2.0	.189	.146	.110	.162	.126	.095	.111	.087	.066	.064	.051	.039	.020	.016	.013	
3.0	.181	.128	.086	.155	.111	.075	.107	.077	.053	.062	.045	.031	.020	.015	.010	
4.0	.174	.115	.071	.149	.100	.062	.102	.069	.043	.059	.041	.026	.019	.013	.008	
5.0	.166	.105	.060	.143	.091	.052	.098	.064	.037	.057	.037	.022	.018	.012	.007	
6.0	.159	.097	.052	.136	.084	.046	.094	.059	.032	.055	.035	.019	.018	.011	.006	
7.0	.152	.090	.047	.130	.078	.041	.090	.055	.029	.052	.032	.017	.017	.011	.006	
8.0	.145	.084	.042	.125	.073	.037	.086	.051	.026	.050	.030	.016	.016	.010	.005	
9.0	.139	.079	.039	.120	.069	.034	.083	.048	.024	.048	.029	.014	.016	.009	.005	
10.0	.133	.075	.036	.115	.065	.032	.080	.046	.023	.046	.027	.013	.015	.009	.004	

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: FL		TYPE:					WEIGHT:				
SPEC.:LWF-11122400W60		DIM.: L=1M					SERIAL No.:				
MFR.: LEDWIDE LIGHTING CO., LTD		SUR.:0.01*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	24.6	26.1	24.9	26.4	26.6	25.1	26.6	25.4	26.9	27.1	
3H	26.2	27.6	26.5	27.9	28.2	27.0	28.4	27.3	28.7	28.9	
4H	26.8	28.2	27.2	28.5	28.8	27.8	29.2	28.1	29.5	29.8	
6H	27.3	28.6	27.6	28.9	29.2	28.5	29.8	28.9	30.1	30.5	
8H	27.4	28.7	27.8	29.0	29.3	28.8	30.1	29.2	30.4	30.7	
12H	27.5	28.7	27.9	29.0	29.4	29.1	30.3	29.5	30.7	31.0	
4H 2H	25.4	26.7	25.7	27.0	27.3	25.7	27.1	26.1	27.4	27.7	
3H	27.2	28.4	27.5	28.7	29.0	27.8	29.0	28.2	29.3	29.7	
4H	27.9	29.0	28.3	29.4	29.8	28.8	29.9	29.2	30.3	30.6	
6H	28.6	29.5	29.0	29.9	30.3	29.7	30.7	30.1	31.1	31.5	
8H	28.8	29.7	29.2	30.1	30.5	30.1	31.0	30.5	31.4	31.8	
12H	28.9	29.8	29.4	30.2	30.6	30.4	31.3	30.9	31.7	32.2	
8H 4H	28.4	29.3	28.8	29.7	30.1	29.1	30.0	29.6	30.4	30.9	
6H	29.2	30.0	29.7	30.4	30.9	30.2	31.0	30.7	31.4	31.9	
8H	29.5	30.2	30.0	30.7	31.2	30.7	31.4	31.2	31.9	32.4	
12H	29.8	30.4	30.3	30.9	31.4	31.3	31.9	31.8	32.3	32.9	
12H 4H	28.4	29.3	28.9	29.7	30.2	29.1	30.0	29.6	30.4	30.8	
6H	29.3	30.0	29.8	30.5	31.0	30.3	31.0	30.8	31.4	31.9	
8H	29.7	30.3	30.3	30.8	31.3	30.9	31.5	31.4	32.0	32.5	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.4					

CIE Pub.117, 1249 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.8)

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	54	43	35	53	42	35	29
0.80	65	52	45	64	52	45	62	51	44	37
1.00	73	61	54	72	61	53	69	62	53	45
1.25	80	69	61	79	68	61	76	67	60	52
1.50	85	75	67	83	74	67	80	72	65	57
2.00	92	83	76	90	82	75	87	79	74	65
2.50	97	88	81	94	87	80	90	84	78	69
3.00	100	93	86	98	91	85	93	88	83	74
4.00	104	98	93	102	96	91	97	92	88	79
5.00	107	102	97	104	99	95	99	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

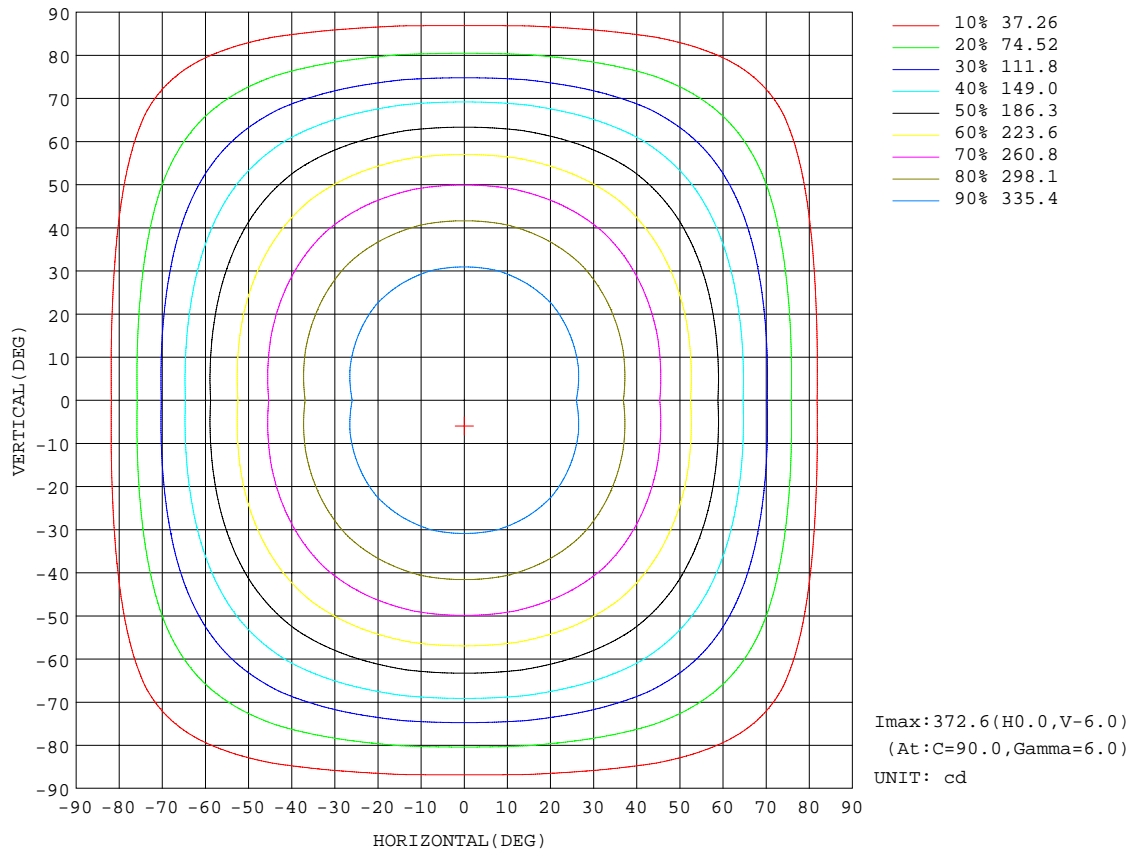


C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 12.226m [K=1.0000]
 Remarks:

AAI Figure

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

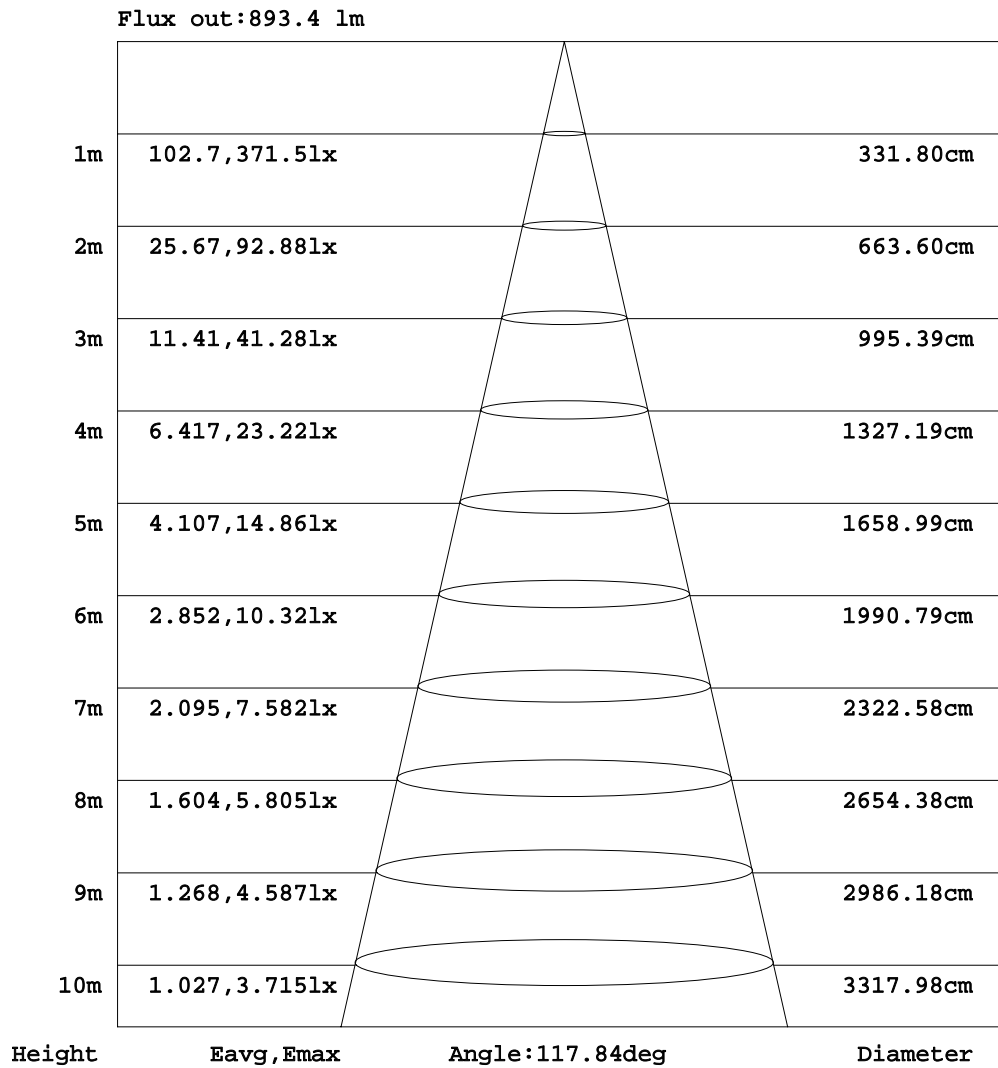


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

Planar Illuminance Curve

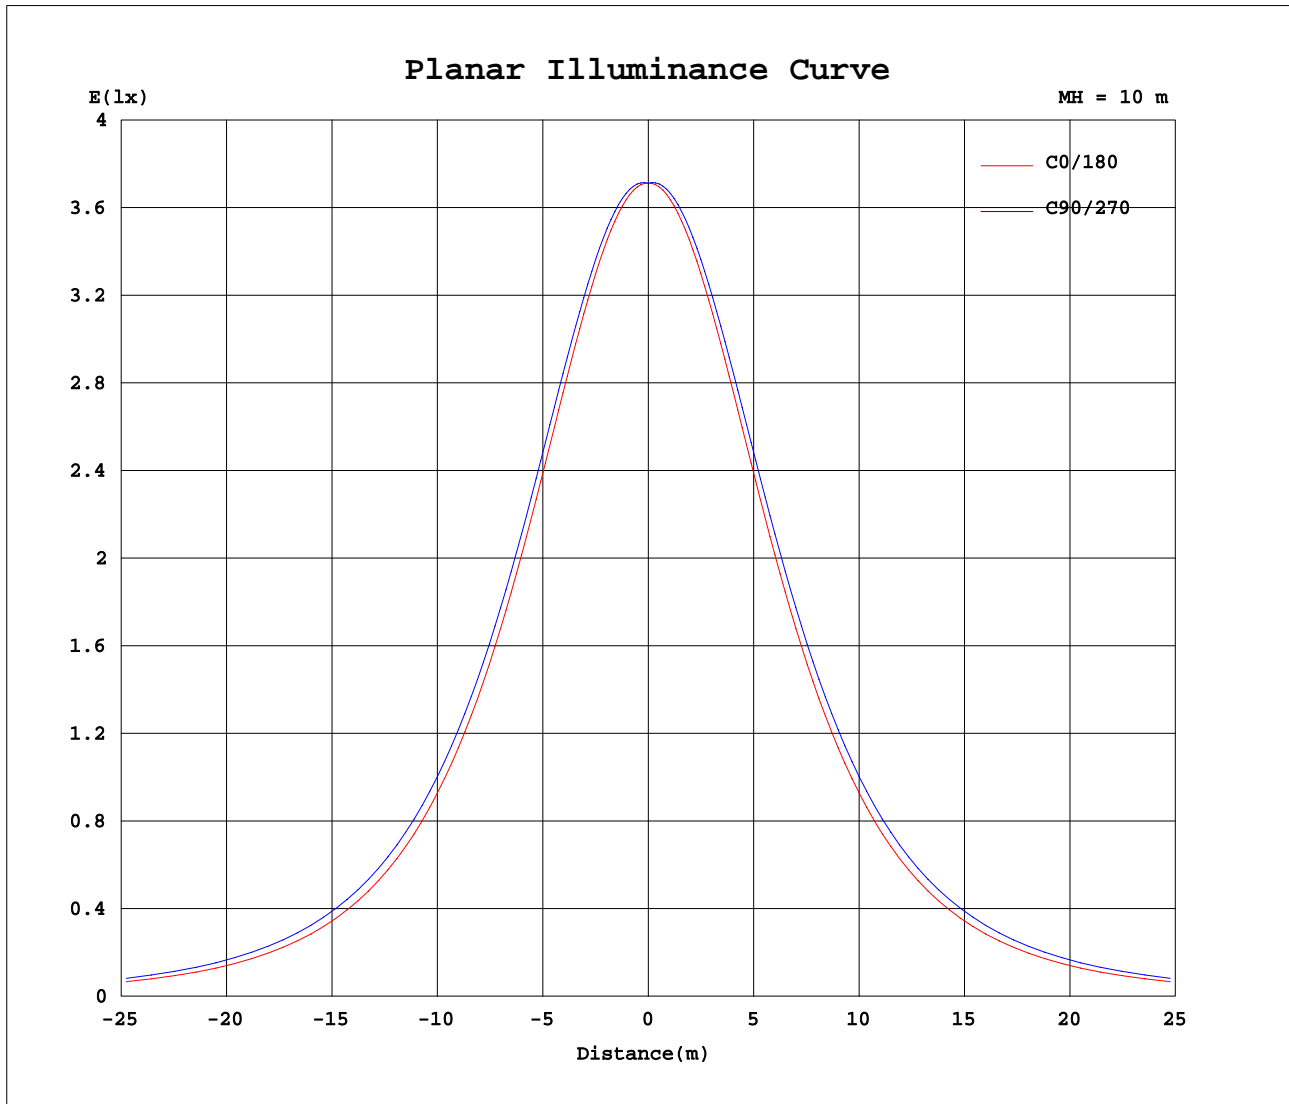

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 12.226m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371
5	370	371	372	372	372	373	373	373	372	372	372	371	370	371	372	372	372	373	373
10	366	368	369	370	371	371	371	371	371	370	369	368	366	368	369	370	371	371	371
15	360	362	364	365	366	367	367	367	366	365	364	362	360	362	364	365	366	367	367
20	350	353	356	358	359	360	360	360	359	358	356	353	350	353	356	358	359	360	360
25	338	342	345	348	349	351	351	351	349	348	345	342	338	342	345	348	349	351	351
30	323	328	331	335	337	338	338	338	337	335	331	328	323	328	331	335	337	338	338
35	306	311	315	319	321	323	323	323	321	319	315	311	306	311	315	319	321	323	323
40	285	291	296	300	303	305	305	305	303	300	296	291	285	291	296	300	303	305	305
45	262	269	274	279	282	284	284	284	282	279	274	269	262	269	274	279	282	284	284
50	237	244	250	255	258	260	260	260	258	255	250	244	237	244	250	255	258	260	260
55	209	217	223	229	232	235	234	235	232	229	223	217	209	217	223	229	232	235	234
60	179	187	194	200	203	206	206	206	203	200	194	187	179	187	194	200	203	206	206
65	147	155	163	169	173	176	176	176	173	169	163	155	147	155	163	169	173	176	176
70	113	122	130	137	141	144	144	144	141	137	130	122	113	122	130	137	141	144	144
75	79.8	89.2	96.4	103	107	110	110	110	107	103	96.4	89.2	79.8	89.2	96.4	103	107	110	110
80	48.1	57.8	64.2	70.7	74.4	77.4	77.3	77.4	74.4	70.7	64.2	57.8	48.1	57.8	64.2	70.7	74.4	77.4	77.3
85	20.2	30.7	36.0	41.5	44.6	47.4	47.1	47.4	44.6	41.5	36.0	30.7	20.2	30.7	36.0	41.5	44.6	47.4	47.1
90	1.71	11.2	14.9	19.0	21.4	23.3	22.7	23.3	21.4	19.0	14.9	11.2	1.71	11.2	14.9	19.0	21.4	23.3	22.7
95	0.69	1.64	3.15	4.79	5.78	7.93	7.12	7.93	5.78	4.79	3.15	1.64	0.69	1.64	3.15	4.79	5.78	7.93	7.12
100	1.10	1.03	1.21	1.48	1.87	2.23	1.82	2.23	1.87	1.48	1.21	1.03	1.10	1.03	1.21	1.48	1.87	2.23	1.82
105	1.54	1.43	1.23	1.21	1.13	1.13	1.20	1.13	1.13	1.21	1.23	1.43	1.54	1.43	1.23	1.21	1.13	1.13	1.20
110	1.99	1.85	1.63	1.64	1.51	1.55	1.50	1.55	1.51	1.64	1.63	1.85	1.99	1.85	1.63	1.64	1.51	1.55	1.50
115	2.41	2.28	2.07	2.08	1.98	2.00	1.93	2.00	1.98	2.08	2.07	2.28	2.41	2.28	2.07	2.08	1.98	2.00	1.93
120	2.77	2.67	2.48	2.52	2.42	2.45	2.37	2.45	2.42	2.52	2.48	2.67	2.77	2.67	2.48	2.52	2.42	2.45	2.37
125	3.10	3.02	2.86	2.92	2.87	2.92	2.77	2.92	2.87	2.92	2.86	3.02	3.10	3.02	2.86	2.92	2.87	2.92	2.77
130	3.36	3.33	3.25	3.32	3.29	3.34	3.17	3.34	3.29	3.32	3.25	3.33	3.36	3.33	3.25	3.32	3.29	3.34	3.17
135	3.60	3.62	3.59	3.71	3.67	3.71	3.53	3.71	3.67	3.71	3.59	3.62	3.60	3.62	3.59	3.71	3.67	3.71	3.53
140	3.80	3.91	3.90	4.06	4.00	4.01	3.84	4.01	4.00	4.06	3.90	3.91	3.80	3.91	3.90	4.06	4.00	4.01	3.84
145	4.02	4.21	4.19	4.37	4.31	4.29	4.05	4.29	4.31	4.37	4.19	4.21	4.02	4.21	4.19	4.37	4.31	4.29	4.05
150	4.24	4.48	4.48	4.63	4.56	4.53	4.28	4.53	4.56	4.63	4.48	4.48	4.24	4.48	4.48	4.63	4.56	4.53	4.28
155	4.50	4.76	4.74	4.88	4.78	4.71	4.60	4.71	4.78	4.88	4.74	4.76	4.50	4.76	4.74	4.88	4.78	4.71	4.60
160	4.73	4.97	4.91	5.06	5.01	4.88	4.89	4.88	5.01	5.06	4.91	4.97	4.73	4.97	4.91	5.06	5.01	4.88	4.89
165	4.97	5.18	5.13	5.25	5.17	5.11	5.13	5.11	5.17	5.25	5.13	5.18	4.97	5.18	5.13	5.25	5.17	5.11	5.13
170	5.28	5.46	5.39	5.49	5.42	5.36	5.39	5.36	5.42	5.49	5.39	5.46	5.28	5.46	5.39	5.49	5.42	5.36	5.39
175	5.61	5.69	5.65	5.78	5.77	5.68	5.80	5.68	5.77	5.78	5.65	5.69	5.61	5.69	5.65	5.78	5.77	5.68	5.80
180	5.90	5.90	5.90	6.01	6.04	6.07	6.29	6.07	6.04	6.01	5.90	5.90	5.90	5.90	5.90	6.01	6.04	6.07	6.29

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: FL	TYPE:	WEIGHT:
SPEC.:LWF-11122400W60	DIM.: L=1M	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

Table--2

UNIT: cd

C(DEG)\ γ (DEG)	285	300	315	330	345														
0	371	371	371	371	371														
5	373	372	372	372	371														
10	371	371	370	369	368														
15	367	366	365	364	362														
20	360	359	358	356	353														
25	351	349	348	345	342														
30	338	337	335	331	328														
35	323	321	319	315	311														
40	305	303	300	296	291														
45	284	282	279	274	269														
50	260	258	255	250	244														
55	235	232	229	223	217														
60	206	203	200	194	187														
65	176	173	169	163	155														
70	144	141	137	130	122														
75	110	107	103	96.4	89.2														
80	77.4	74.4	70.7	64.2	57.8														
85	47.4	44.6	41.5	36.0	30.7														
90	23.3	21.4	19.0	14.9	11.2														
95	7.93	5.78	4.79	3.15	1.64														
100	2.23	1.87	1.48	1.21	1.03														
105	1.13	1.13	1.21	1.23	1.43														
110	1.55	1.51	1.64	1.63	1.85														
115	2.00	1.98	2.08	2.07	2.28														
120	2.45	2.42	2.52	2.48	2.67														
125	2.92	2.87	2.92	2.86	3.02														
130	3.34	3.29	3.32	3.25	3.33														
135	3.71	3.67	3.71	3.59	3.62														
140	4.01	4.00	4.06	3.90	3.91														
145	4.29	4.31	4.37	4.19	4.21														
150	4.53	4.56	4.63	4.48	4.48														
155	4.71	4.78	4.88	4.74	4.76														
160	4.88	5.01	5.06	4.91	4.97														
165	5.11	5.17	5.25	5.13	5.18														
170	5.36	5.42	5.49	5.39	5.46														
175	5.68	5.77	5.78	5.65	5.69														
180	6.07	6.04	6.01	5.90	5.90														

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-01-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks: