
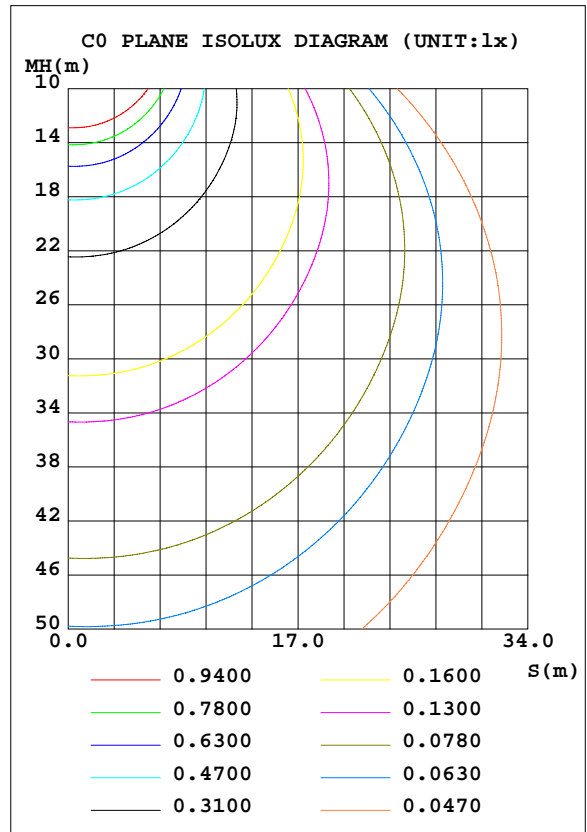


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 37.60 lm/W			
MODEL		I _{max} (cd)	157.3	S/MH(C0/180)	1.42
NOMINAL POWER(W)	14.8781	LOR(%)	100.0	S/MH(C90/270)	1.37
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	590.96	η UP, DN(C0-180)	0.8,49.2
NOMINAL FLUX(lm)	590.955	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.8,49.2
LAMPS INSIDE	1	η up(%)	1.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	η down(%)	98.4	CIBSE SHR MAX	1.55

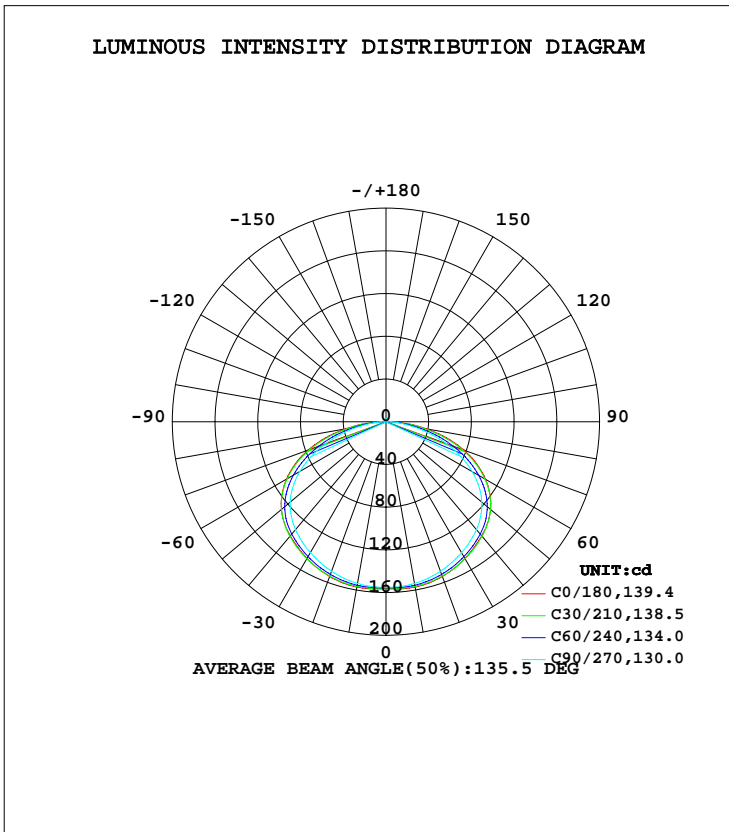

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	157.2	156.0	153.8	156.0	157.2	156.0	153.8	156.0	0- 10	14.89	14.89	2.52,2.52
20	154.2	153.2	149.0	153.2	154.2	153.2	149.0	153.2	10- 20	43.74	58.62	9.92,9.92
30	147.8	147.5	141.6	147.5	147.8	147.5	141.6	147.5	20- 30	69.20	127.8	21.6,21.6
40	139.5	139.4	131.8	139.4	139.5	139.4	131.8	139.4	30- 40	89.28	217.1	36.7,36.7
50	127.8	126.4	117.1	126.4	127.8	126.4	117.1	126.4	40- 50	102.1	319.2	54,54
60	107.6	104.3	93.10	104.3	107.6	104.3	93.10	104.3	50- 60	102.7	421.9	71.4,71.4
70	77.65	72.31	60.16	72.31	77.65	72.31	60.16	72.31	60- 70	86.68	508.6	86.1,86.1
80	38.73	33.63	24.75	33.63	38.73	33.63	24.75	33.63	70- 80	54.82	563.4	95.3,95.3
90	0.9267	4.969	3.771	4.969	0.9267	4.969	3.771	4.969	80- 90	18.06	581.4	98.4,98.4
100	0.5468	0.6257	0.6801	0.6257	0.5468	0.6257	0.6801	0.6257	90-100	1.564	583.0	98.7,98.7
110	0.9920	1.056	1.109	1.056	0.9920	1.056	1.109	1.056	100-110	0.8697	583.9	98.8,98.8
120	1.297	1.423	1.532	1.423	1.297	1.423	1.532	1.423	110-120	1.221	585.1	99,99
130	1.524	1.720	1.790	1.720	1.524	1.720	1.790	1.720	120-130	1.394	586.5	99.2,99.2
140	1.673	1.955	1.993	1.955	1.673	1.955	1.993	1.955	130-140	1.390	587.9	99.5,99.5
150	1.806	2.126	2.095	2.126	1.806	2.126	2.095	2.126	140-150	1.236	589.1	99.7,99.7
160	1.985	2.251	2.181	2.251	1.985	2.251	2.181	2.251	150-160	0.9747	590.1	99.9,99.9
170	2.243	2.385	2.361	2.385	2.243	2.385	2.361	2.385	160-170	0.6349	590.7	100,100
180	2.502	2.509	2.650	2.509	2.502	2.509	2.650	2.509	170-180	0.2307	591.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 267.16 lm

%lum = 45.2%
%lamp = 45.2%

Conical surface Flux(120deg): 421.87 lm


%lum = 71.4%
%lamp = 71.4%

C Range: 0 - 90DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-07-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:12.226m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

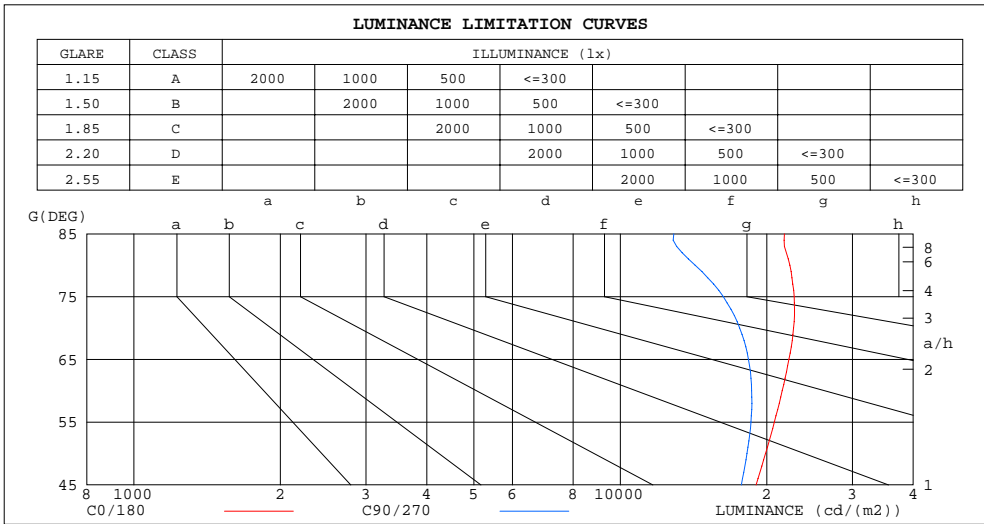

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	21740	12884
80	22305	14251
75	22765	16275
70	22705	17590
65	22209	18340
60	21518	18620
55	20735	18557
50	19880	18214
45	19020	17727

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.344	.196	.062	.336	.192	.061	.322	.185	.059	.309	.178	.057	.297	.172	.055	
2.0	.318	.174	.053	.311	.171	.053	.298	.166	.052	.287	.161	.050	.276	.156	.049	
3.0	.291	.155	.046	.285	.152	.046	.273	.148	.045	.263	.144	.044	.253	.140	.043	
4.0	.266	.138	.041	.260	.136	.040	.250	.133	.040	.241	.129	.039	.232	.126	.038	
5.0	.244	.124	.036	.239	.123	.036	.230	.120	.035	.222	.117	.035	.214	.114	.034	
6.0	.225	.113	.032	.221	.111	.032	.212	.109	.032	.205	.106	.031	.198	.104	.031	
7.0	.208	.103	.029	.204	.102	.029	.197	.100	.029	.190	.098	.028	.184	.096	.028	
8.0	.194	.095	.027	.190	.094	.026	.184	.092	.026	.178	.090	.026	.172	.088	.026	
9.0	.181	.087	.024	.178	.087	.024	.172	.085	.024	.166	.083	.024	.161	.082	.024	
10.0	.169	.081	.023	.167	.080	.022	.161	.079	.022	.156	.078	.022	.152	.076	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.195	.168	.144	.167	.144	.124	.114	.099	.086	.066	.057	.050	.021	.018	.016	
2.0	.188	.144	.107	.161	.124	.093	.110	.086	.065	.064	.050	.038	.020	.016	.012	
3.0	.181	.127	.084	.155	.110	.073	.107	.076	.051	.062	.044	.030	.020	.014	.010	
4.0	.174	.114	.068	.149	.098	.059	.102	.069	.042	.059	.040	.025	.019	.013	.008	
5.0	.166	.104	.058	.143	.090	.050	.098	.063	.035	.057	.037	.021	.018	.012	.007	
6.0	.159	.096	.050	.136	.083	.044	.094	.058	.031	.055	.034	.018	.018	.011	.006	
7.0	.152	.089	.045	.130	.077	.039	.090	.054	.028	.052	.032	.016	.017	.010	.005	
8.0	.145	.083	.040	.125	.072	.035	.086	.051	.025	.050	.030	.015	.016	.010	.005	
9.0	.139	.078	.037	.119	.068	.032	.083	.048	.023	.048	.028	.014	.016	.009	.005	
10.0	.133	.074	.035	.114	.064	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME:	TYPE:					WEIGHT:				
SPEC.:LWF-1124006ORGB	DIM.: 1					SERIAL No.:				
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.6	27.2	25.9	27.4	27.7	25.0	26.6	25.3	26.9	27.1
3H	27.7	29.1	28.0	29.4	29.7	26.7	28.2	27.1	28.5	28.8
4H	28.5	29.9	28.9	30.2	30.5	27.4	28.8	27.7	29.1	29.4
6H	29.2	30.6	29.6	30.9	31.2	27.8	29.1	28.2	29.4	29.8
8H	29.5	30.8	29.8	31.1	31.4	27.9	29.2	28.3	29.5	29.9
12H	29.6	30.9	30.0	31.2	31.6	28.0	29.3	28.4	29.6	29.9
4H 2H	26.3	27.7	26.7	28.0	28.3	25.9	27.3	26.2	27.6	27.9
3H	28.5	29.8	28.9	30.1	30.4	27.7	29.0	28.1	29.3	29.7
4H	29.5	30.7	29.9	31.0	31.4	28.5	29.6	28.9	30.0	30.4
6H	30.4	31.4	30.8	31.8	32.2	29.1	30.1	29.5	30.5	30.9
8H	30.7	31.6	31.1	32.0	32.5	29.2	30.2	29.7	30.6	31.0
12H	30.9	31.8	31.4	32.2	32.7	29.4	30.2	29.8	30.7	31.1
8H 4H	29.8	30.8	30.3	31.2	31.6	28.9	29.9	29.4	30.3	30.7
6H	30.8	31.6	31.3	32.1	32.5	29.7	30.5	30.1	30.9	31.4
8H	31.3	32.0	31.8	32.4	32.9	29.9	30.6	30.4	31.1	31.6
12H	31.6	32.2	32.1	32.7	33.2	30.1	30.7	30.6	31.2	31.7
12H 4H	29.8	30.7	30.3	31.1	31.6	29.0	29.9	29.5	30.3	30.7
6H	30.9	31.6	31.4	32.1	32.6	29.8	30.5	30.3	30.9	31.4
8H	31.4	32.0	31.9	32.5	33.0	30.1	30.7	30.6	31.2	31.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.5				

CIE Pub.117, 591.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.8)

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	33	52	40	33	51	40	33	26
0.80	63	50	43	62	50	42	60	49	42	34
1.00	72	59	51	70	59	51	68	60	51	43
1.25	79	67	59	77	67	59	74	65	58	50
1.50	84	73	65	82	72	65	79	70	64	55
2.00	92	82	75	90	81	74	86	78	72	64
2.50	96	87	80	94	86	79	89	83	77	68
3.00	100	92	86	97	90	85	93	87	82	73
4.00	104	98	92	101	96	91	97	92	88	78
5.00	107	101	97	104	99	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

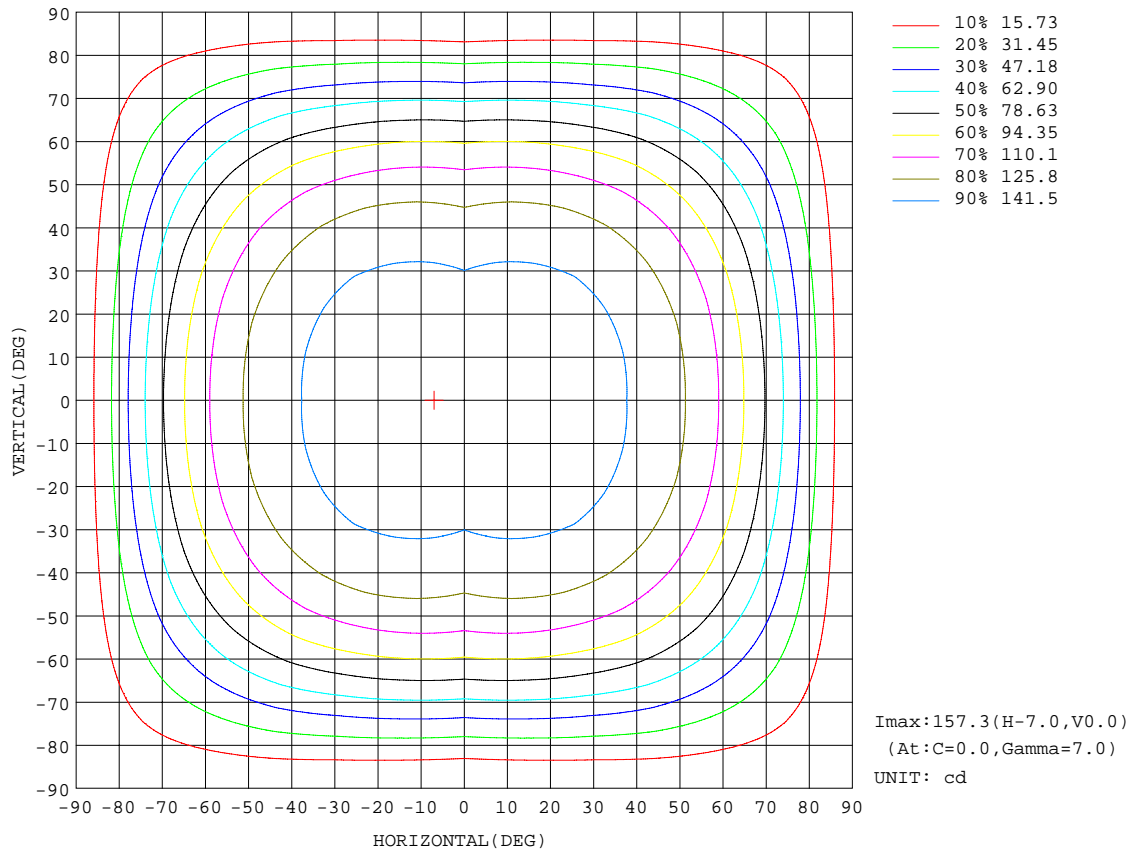


C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 12.226m [K=1.0000]
 Remarks:

AAI Figure

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

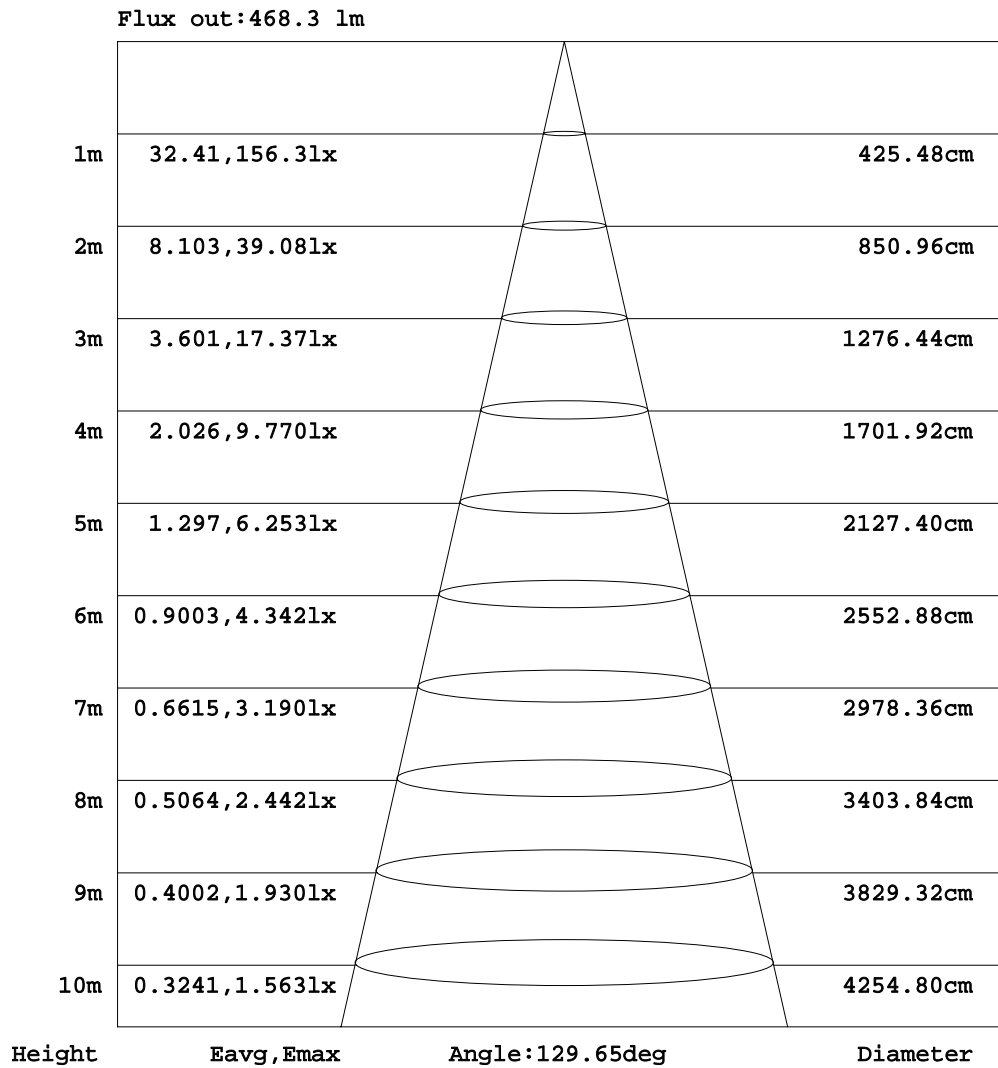


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

Planar Illuminance Curve

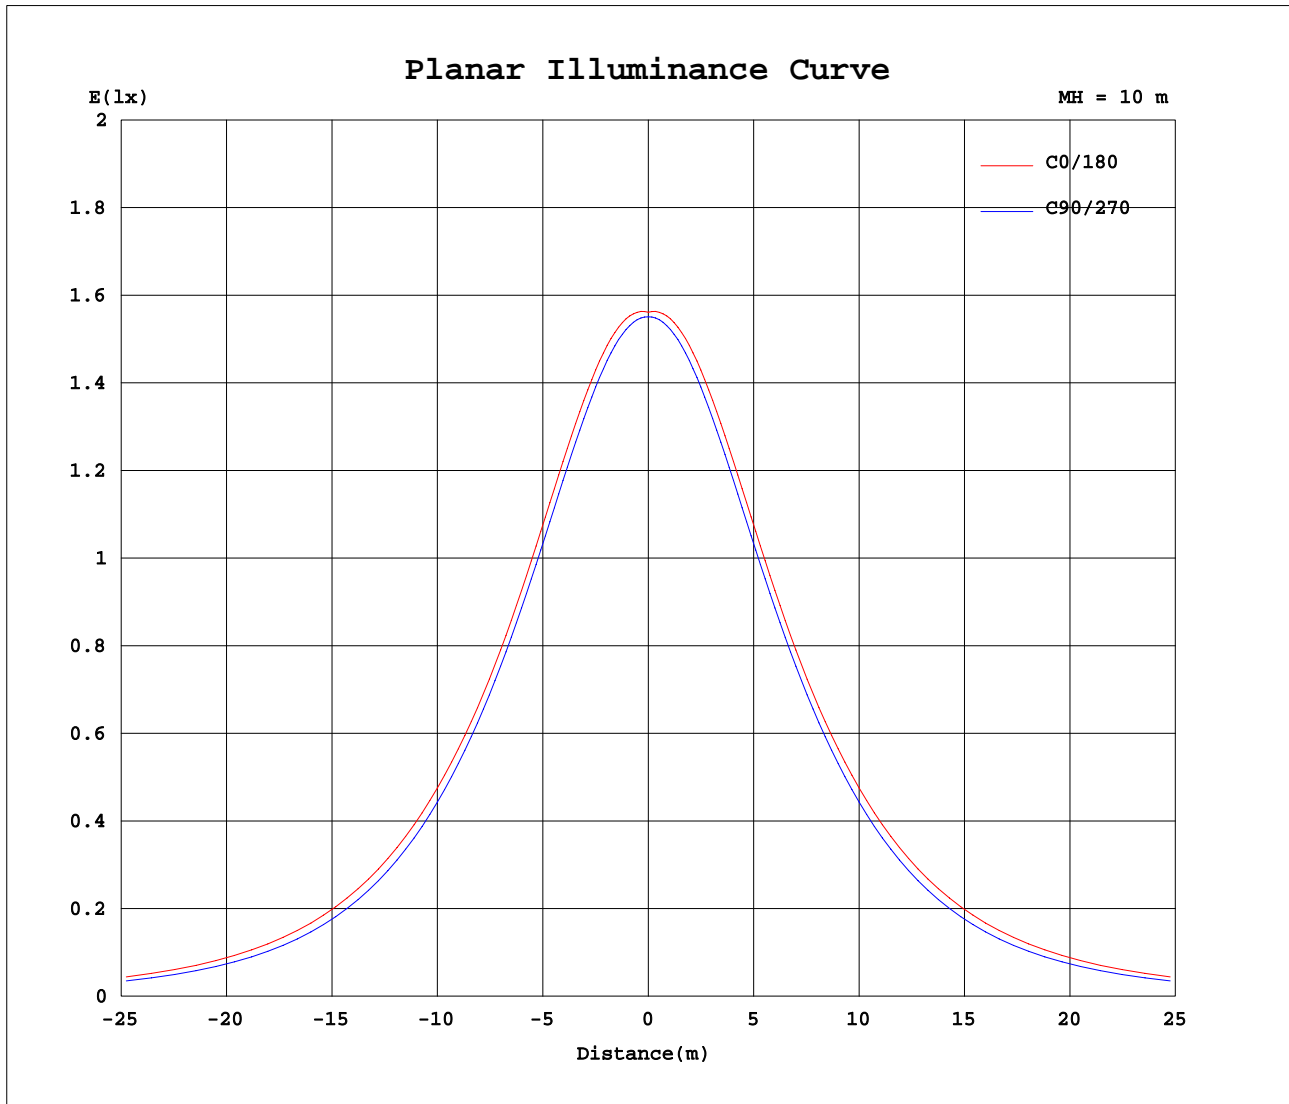

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 12.226m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-11240060RGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	156	156	156	155	155	155	155	155	155	155	156	156	156	156	156	155	155	155	155
5	157	157	156	156	156	155	155	155	156	156	156	157	157	157	156	156	156	155	155
10	157	157	157	156	155	154	154	154	155	156	157	157	157	157	157	156	155	154	154
15	156	156	156	155	154	153	152	153	154	155	156	156	156	156	156	155	154	153	152
20	154	154	154	153	152	151	149	151	152	153	154	154	154	154	154	153	152	151	149
25	151	151	151	151	149	148	146	148	149	151	151	151	151	151	151	151	149	148	146
30	148	148	148	147	146	144	142	144	146	147	148	148	148	148	148	147	146	144	142
35	144	144	144	144	142	140	137	140	142	144	144	144	144	144	144	144	142	140	137
40	139	140	140	139	137	135	132	135	137	139	140	140	139	140	140	139	137	135	132
45	134	135	135	134	132	129	125	129	132	134	135	135	134	135	135	134	132	129	125
50	128	128	128	126	124	121	117	121	124	126	128	128	128	128	128	126	124	121	117
55	119	120	119	117	113	110	106	110	113	117	119	120	119	120	119	117	113	110	106
60	108	108	107	104	100	96.6	93.1	96.6	100	104	107	108	108	108	107	104	100	96.6	93.1
65	93.9	94.2	92.5	89.4	84.7	80.9	77.5	80.9	84.7	89.4	92.5	94.2	93.9	94.2	92.5	89.4	84.7	80.9	77.5
70	77.7	77.6	75.6	72.3	67.2	63.5	60.2	63.5	67.2	72.3	75.6	77.6	77.7	77.6	75.6	72.3	67.2	63.5	60.2
75	58.9	58.7	56.4	53.3	48.4	45.1	42.1	45.1	48.4	53.3	56.4	58.7	58.9	58.7	56.4	53.3	48.4	45.1	42.1
80	38.7	38.3	36.1	33.6	29.7	27.1	24.7	27.1	29.7	33.6	36.1	38.3	38.7	38.3	36.1	33.6	29.7	27.1	24.7
85	18.9	19.0	17.3	15.9	13.7	12.4	11.2	12.4	13.7	15.9	17.3	19.0	18.9	19.0	17.3	15.9	13.7	12.4	11.2
90	0.93	5.33	5.08	4.97	4.41	4.21	3.77	4.21	4.41	4.97	5.08	5.33	0.93	5.33	5.08	4.97	4.41	4.21	3.77
95	0.38	0.52	0.83	1.13	1.20	1.21	1.14	1.21	1.20	1.13	0.83	0.52	0.38	0.52	0.83	1.13	1.20	1.21	1.14
100	0.55	0.64	0.61	0.63	0.59	0.70	0.68	0.70	0.59	0.63	0.61	0.64	0.55	0.64	0.61	0.63	0.59	0.70	0.68
105	0.77	0.83	0.74	0.84	0.77	0.91	0.88	0.91	0.77	0.84	0.74	0.83	0.77	0.83	0.74	0.84	0.77	0.91	0.88
110	0.99	1.02	0.93	1.06	1.01	1.13	1.11	1.13	1.01	1.06	0.93	1.02	0.99	1.02	0.93	1.06	1.01	1.13	1.11
115	1.16	1.21	1.14	1.25	1.24	1.37	1.34	1.37	1.24	1.25	1.14	1.21	1.16	1.21	1.14	1.25	1.24	1.37	1.34
120	1.30	1.37	1.29	1.42	1.40	1.55	1.53	1.55	1.40	1.42	1.29	1.37	1.30	1.37	1.29	1.42	1.40	1.55	1.53
125	1.42	1.49	1.44	1.59	1.56	1.71	1.67	1.71	1.56	1.59	1.44	1.49	1.42	1.49	1.44	1.59	1.56	1.71	1.67
130	1.52	1.61	1.56	1.72	1.74	1.87	1.79	1.87	1.74	1.72	1.56	1.61	1.52	1.61	1.56	1.72	1.74	1.87	1.79
135	1.63	1.70	1.66	1.84	1.88	1.98	1.88	1.98	1.88	1.84	1.66	1.70	1.63	1.70	1.66	1.84	1.88	1.98	1.88
140	1.67	1.79	1.76	1.95	1.96	2.06	1.99	2.06	1.96	1.95	1.76	1.79	1.67	1.79	1.76	1.95	1.96	2.06	1.99
145	1.74	1.88	1.87	2.05	2.02	2.12	2.00	2.12	2.02	2.05	1.87	1.88	1.74	1.88	1.87	2.05	2.02	2.12	2.00
150	1.81	1.97	1.98	2.13	2.13	2.17	2.09	2.17	2.13	2.13	1.98	1.97	1.81	1.97	1.98	2.13	2.13	2.17	2.09
155	1.88	2.08	2.03	2.20	2.16	2.19	2.13	2.19	2.16	2.20	2.03	2.08	1.88	2.08	2.03	2.20	2.16	2.19	2.13
160	1.99	2.15	2.12	2.25	2.21	2.24	2.18	2.24	2.21	2.25	2.12	2.15	1.99	2.15	2.12	2.25	2.21	2.24	2.18
165	2.07	2.22	2.17	2.31	2.27	2.30	2.25	2.30	2.27	2.31	2.17	2.22	2.07	2.22	2.17	2.31	2.27	2.30	2.25
170	2.24	2.34	2.28	2.38	2.33	2.38	2.36	2.38	2.33	2.38	2.28	2.34	2.24	2.34	2.28	2.38	2.33	2.38	2.36
175	2.37	2.45	2.40	2.51	2.48	2.48	2.49	2.48	2.48	2.51	2.40	2.45	2.37	2.45	2.40	2.51	2.48	2.48	2.49
180	2.50	2.51	2.50	2.51	2.55	2.56	2.65	2.56	2.55	2.51	2.50	2.51	2.50	2.51	2.50	2.51	2.55	2.56	2.65

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:LWF-1124006ORGB	DIM.: 1	SERIAL No.:
MFR.: LEDWIDE LIGHTING CO., LTD	SUR.:0.01*1	Shielding Angle:

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345														
0	155	155	155	156	156														
5	155	156	156	156	157														
10	154	155	156	157	157														
15	153	154	155	156	156														
20	151	152	153	154	154														
25	148	149	151	151	151														
30	144	146	147	148	148														
35	140	142	144	144	144														
40	135	137	139	140	140														
45	129	132	134	135	135														
50	121	124	126	128	128														
55	110	113	117	119	120														
60	96.6	100	104	107	108														
65	80.9	84.7	89.4	92.5	94.2														
70	63.5	67.2	72.3	75.6	77.6														
75	45.1	48.4	53.3	56.4	58.7														
80	27.1	29.7	33.6	36.1	38.3														
85	12.4	13.7	15.9	17.3	19.0														
90	4.21	4.41	4.97	5.08	5.33														
95	1.21	1.20	1.13	0.83	0.52														
100	0.70	0.59	0.63	0.61	0.64														
105	0.91	0.77	0.84	0.74	0.83														
110	1.13	1.01	1.06	0.93	1.02														
115	1.37	1.24	1.25	1.14	1.21														
120	1.55	1.40	1.42	1.29	1.37														
125	1.71	1.56	1.59	1.44	1.49														
130	1.87	1.74	1.72	1.56	1.61														
135	1.98	1.88	1.84	1.66	1.70														
140	2.06	1.96	1.95	1.76	1.79														
145	2.12	2.02	2.05	1.87	1.88														
150	2.17	2.13	2.13	1.98	1.97														
155	2.19	2.16	2.20	2.03	2.08														
160	2.24	2.21	2.25	2.12	2.15														
165	2.30	2.27	2.31	2.17	2.22														
170	2.38	2.33	2.38	2.28	2.34														
175	2.48	2.48	2.51	2.40	2.45														
180	2.56	2.55	2.51	2.50	2.51														

C Range: 0 - 90DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-07-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:12.226m [K=1.0000]
 Remarks: