












LW-PR50N ^{NEW}
Down





ACCESSORIES :

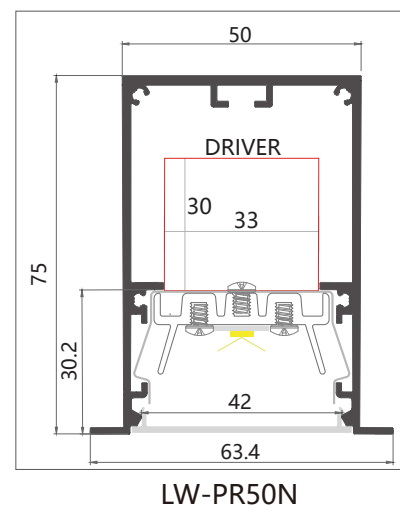	Aluminum Endcap (with/without hole) Code: PR50N-CAP-N		U-shaped clip Code: PR50N-Clip
 (Optional)	Joiners 120°A Code: J-120A	 (Optional)	Joiners 90°A Code: J-90A
 (Optional)	Joiners 90°B Code: J-90B	 (Optional)	Joiners 120°B Code: J-120B
 (Optional)	Dali & Push Dimmable LED Driver 30/36/60/100W Code:LW-SCD	 (Optional)	Joiners 180°A Code: J-180A
 (Optional)	Standard IP67 Led Powersupply 20/30/36/45/60W Code: LW-HLD	 (Optional)	JGear Tray Clip Code: PR50N-Clip



LW-PR50N

Optional Diffuser(PMMA/PC)

PR50N					
Dimensions(mm)	Max strip width	Opal	New opal	Frosted	Clear
63.4*75mm	18mm	✓	✓	/	/
Code		PR50N-O	PR50N-N	/	/
Light Transmittance		60%	74%	/	/


<57.6W/m

Stocked length availability:2m,2.5m.
Customized length below 6m upon your request.




Installing Instructions


Recessed

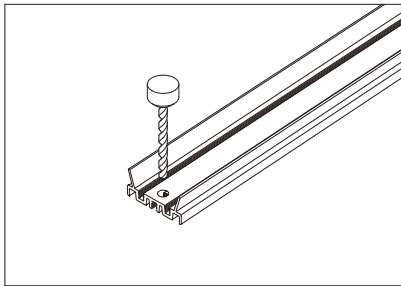


1. Drill a hole on the reflector for cable feed from LED strip

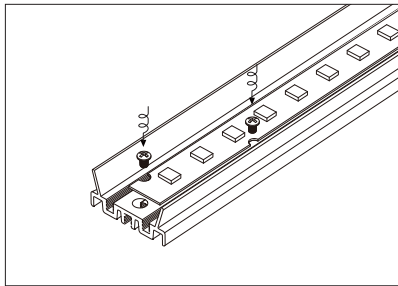


2. Fixing Rigid Led strip on reflector with suitable screws

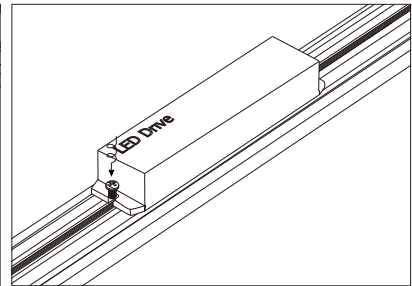


3. Install power supply, set screws

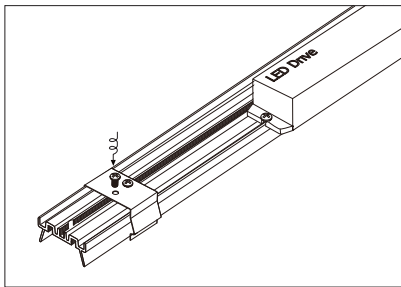


4. Install metal clip, set screw

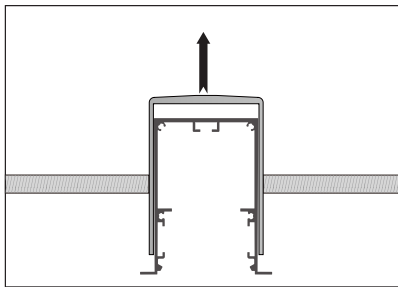


5. Place the profile and U clip into the cut-out hole .

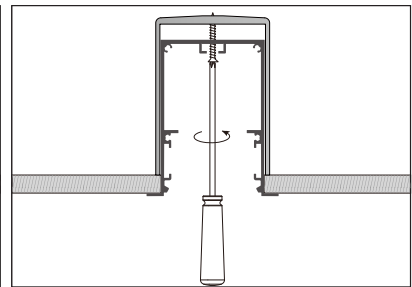


6. Screw the profile and U clip to the cut-out hold.

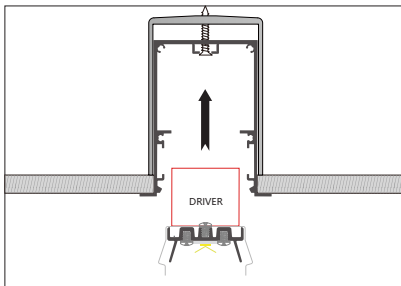


7. Place the reflector into the profile, and connect the LED strip up

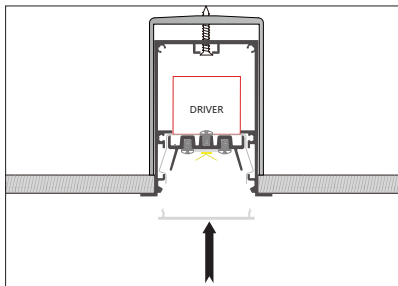

8. Attach diffuser into place, working from end to end

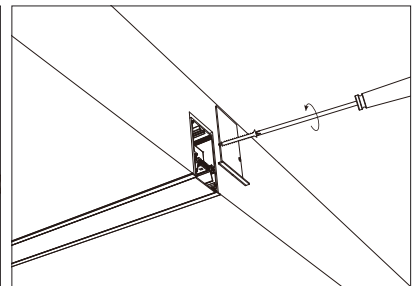


9. Screw the end caps on

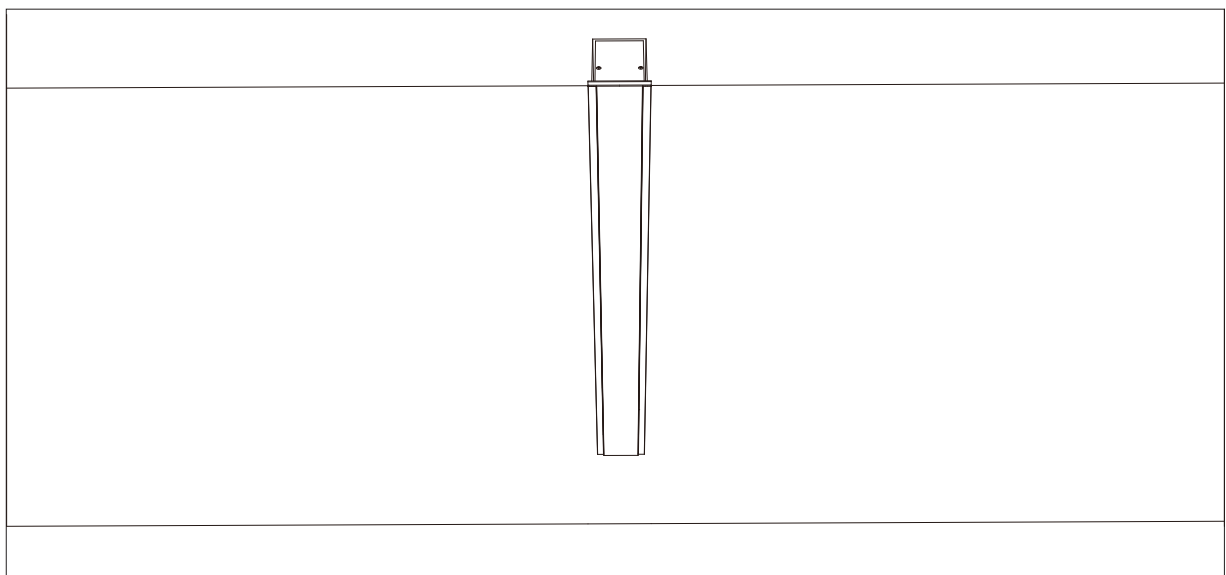


10. Installation completed.


Applicable joiners




90°B



90°A



120°



180°A

Installation & Joint Options

