




Wall Mounted



Surface



Suspended



LW-PUH35

ACCESSORIES :



Aluminium Endcap
(without hole)
Code: PUH35-Cap



Suspension Kits
Code: Sus.KitsA



(Optional)

Standard IP67 Led Powersupply
20/30/36/45/60W
Code: LW-HLD



(Optional)

Wall Clips
Code: WN35-WClip



(Optional)

Joiners 120°A
Code: J-120A



(Optional)

Joiners 90°A
Code: J-90A



(Optional)

Joiners 180°A
Code: J-180A



(Optional)

CNC Aluminum Cap
(without hole)
Code: PUH35-Cap-N




(Optional)

Dali & Push Dimmable LED Driver
30/36/60/100W
Code:LW-SCD



(Optional)

Metal Clip
Code: P35-Clip-M



LW-PUH35

Optional Diffuser(PMMA)

PUH35					
Dimensions(mm)	Max strip width	Opal	New Opal	Frosted	Clear
35*88	31.2mm	✓	/	/	/
Code		PUH35-O	/	/	/
Light Transmittance		60%	/	/	/

< 38.4W/m


Aluminum Profile Weight:1.1kg/m

Stocked length availability:2m,2.5m.
Customized length below 6m upon your request.




Installing Instructions


Wall Mounted




1. Attach the wall side clip to surface



2. Attach the other side of clip to light fixture




3. Mount the light fixture onto the wall attachment




4. Secure the clips to ensure it stays in place


Applicable joiners

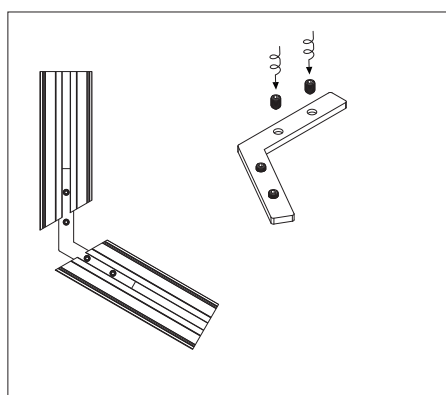

120°A

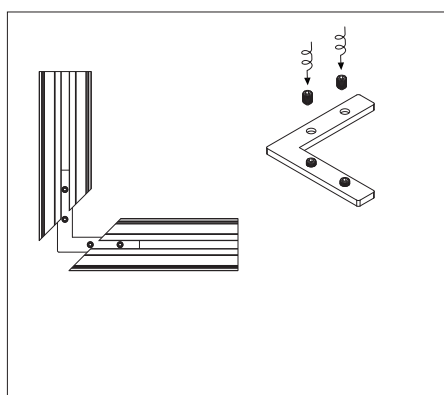


90°A

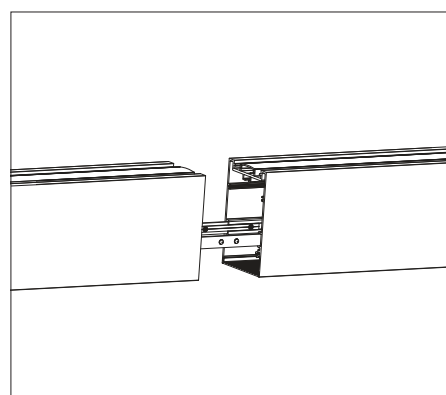

180°A


Other installation & Connection ways.

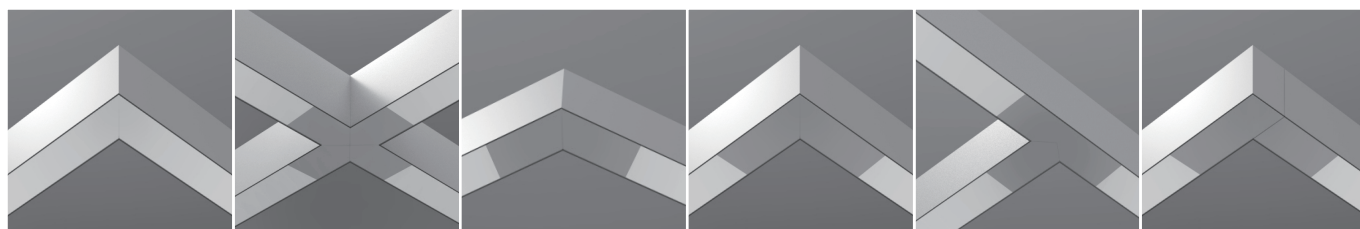




Installing Instructions


Suspended

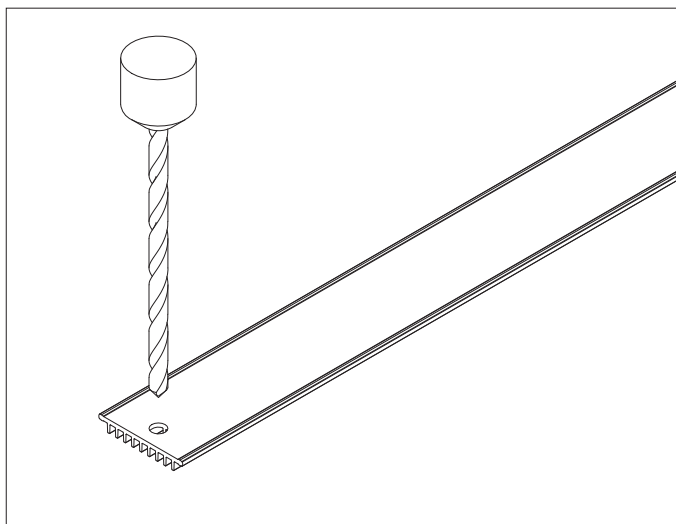


1. Drill a hole on the top aluminium

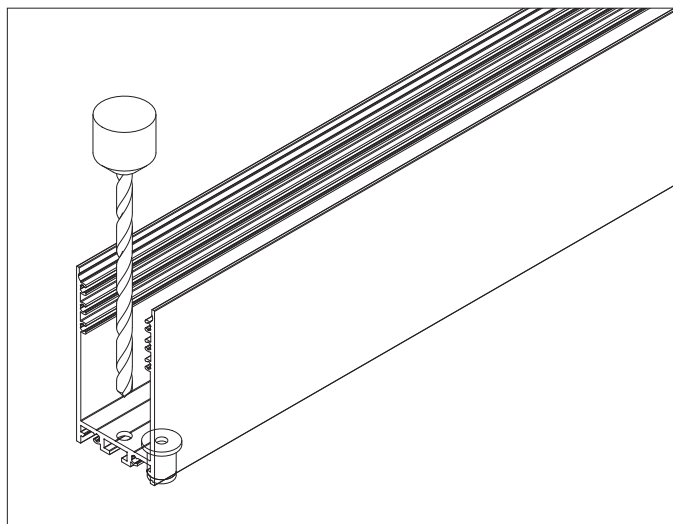


2. Drill a hole on the basic aluminium

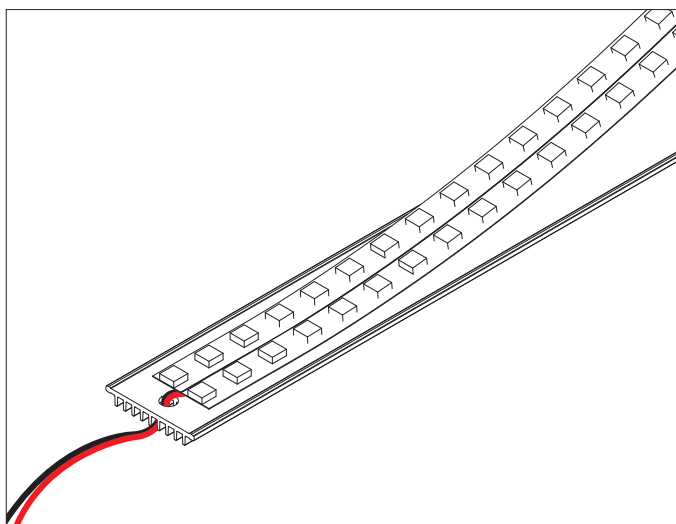


3. Stick the led strip

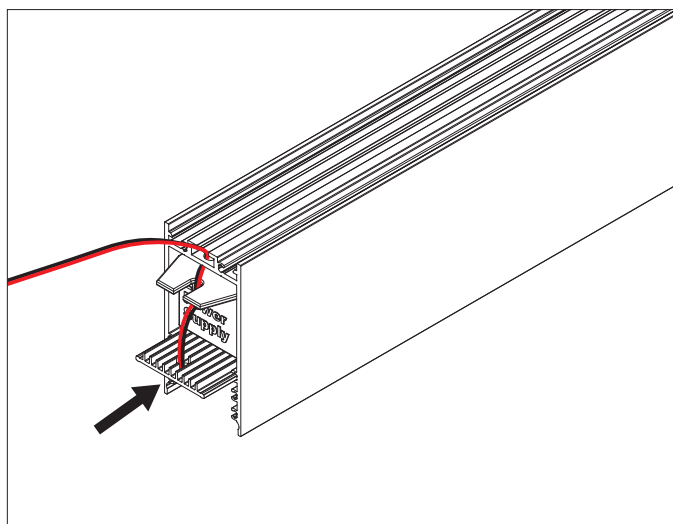

4. Put the led driver into place

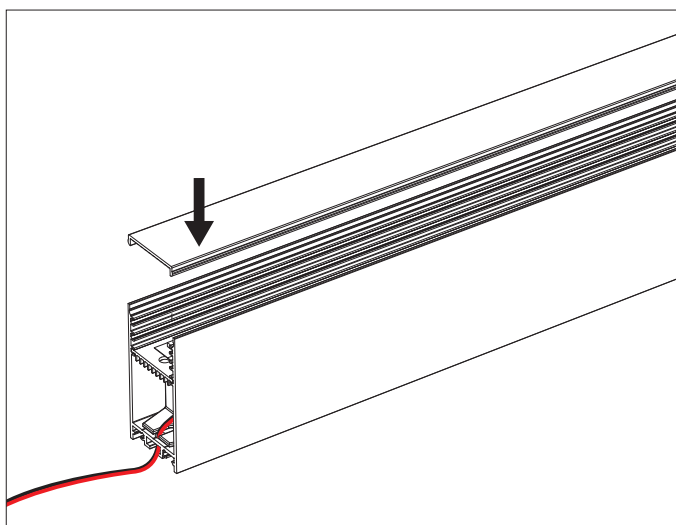

5. Click/snap on the diffuser from end to end

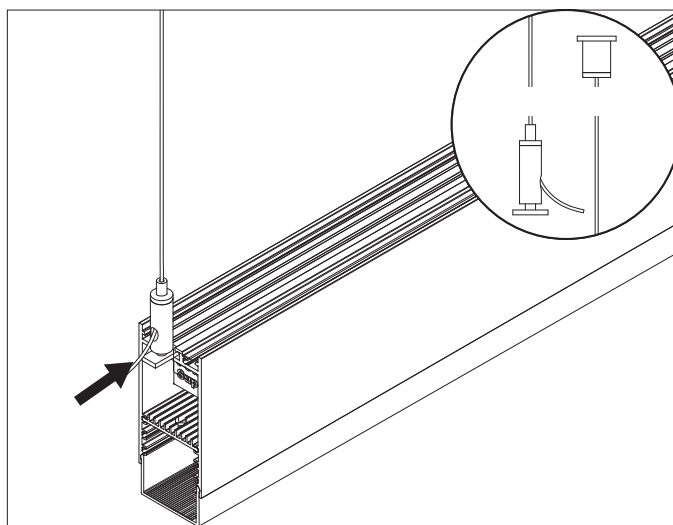


6. Install the Suspension Kits





Installing Instructions

Suspended

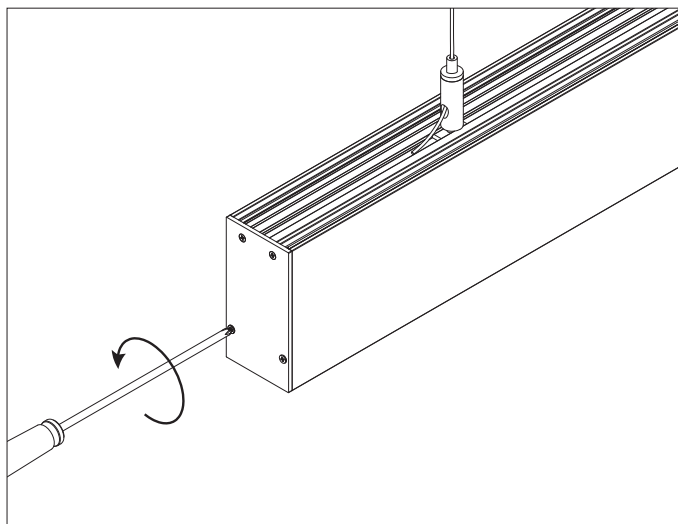

7. Screws the end caps

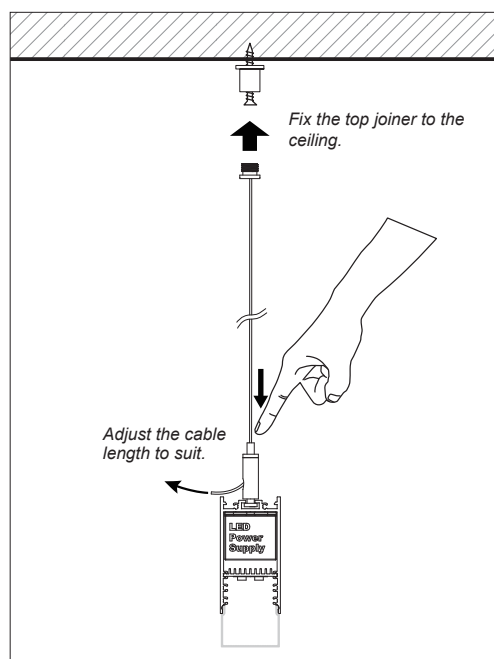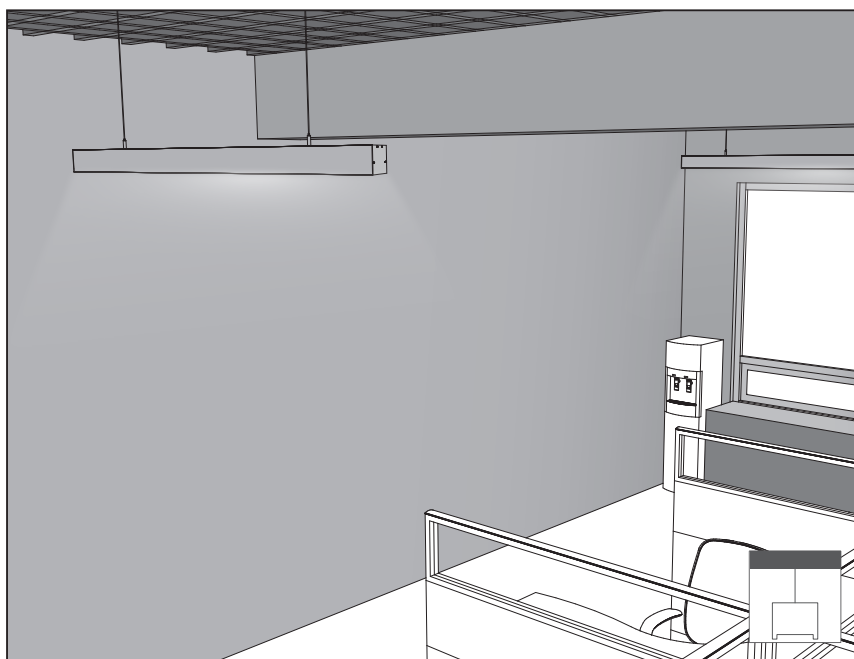



Installing Instructions

Surface

