




LW-TR60 NEW

ACCESSORIES :


	Aluminium Endcap (without hole) Code: TR60-Cap		Aluminum Endcap (without hole) Code: TR60-Cap
	Stainless Steel L bracket Code: LW-LMB		Alum. bridge base Code: LW-TR60
	Spring Clip Code: SC-WN31		Joiners 180°A Code: J-180A
	Joiners 90°A Code: J-90A		Joiners 180°B Code: J-180B
	Joiners 120°A Code: J-120A		

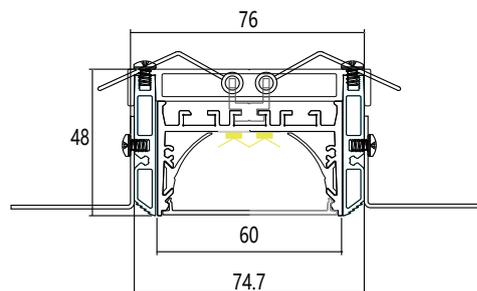


Optional Diffuser(PMMA)

TR60					
Dimensions(mm)	Max strip width	Opal	New opal	Frosted	Clear
65*48	46mm	/	√	/	/
Code		/	TR60-N	/	/
Light Transmittance		/	74%	/	/


<57.6W/m
 Aluminum Profile Weight:2.2kg/m
 Stocked length availability:2m,2.5m.
 Customized length below 6m upon your request.

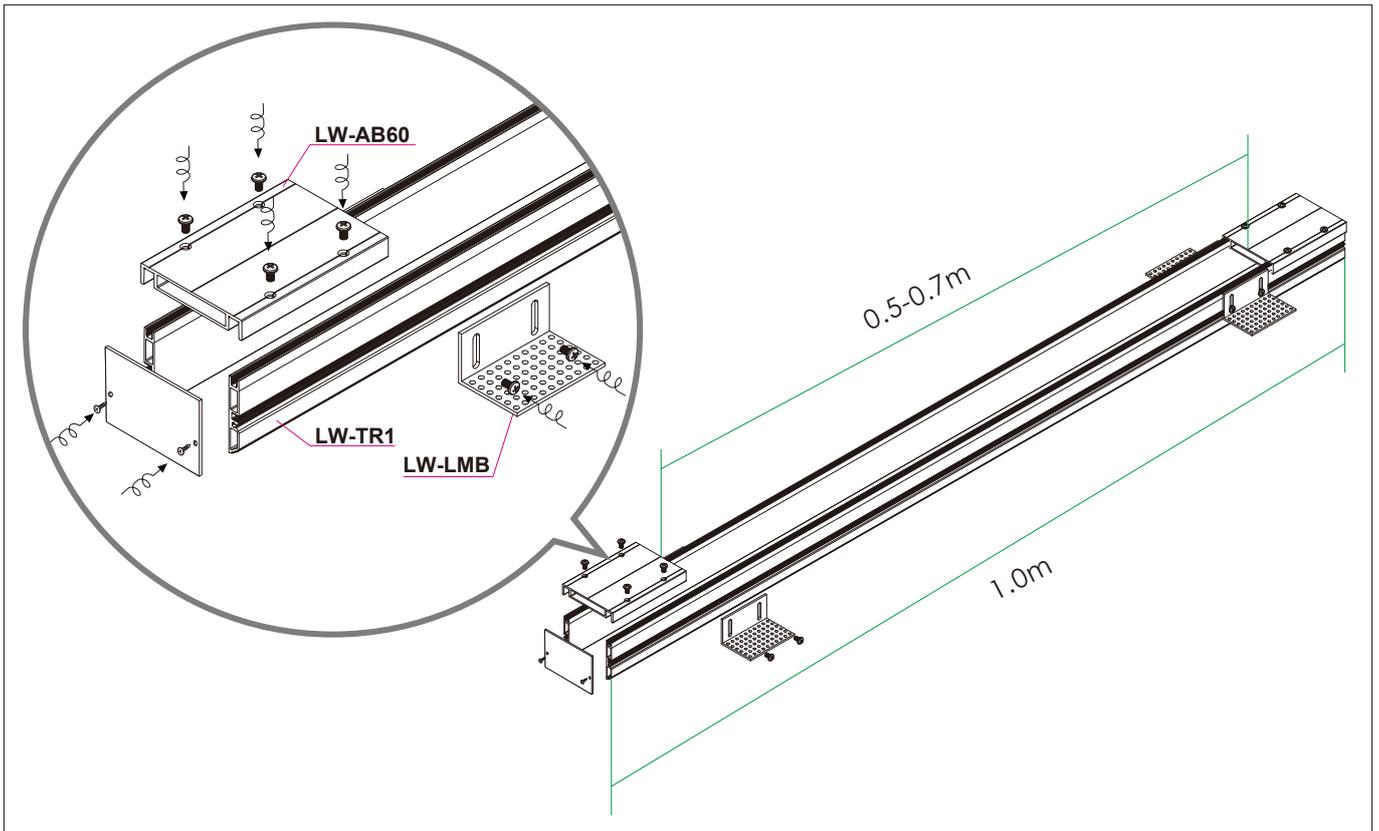


1. Assemble the AB and TR1 into each other as pictured above, followed by the end caps into place. Ensure the AB clamps are placed between 50-70cm apart.

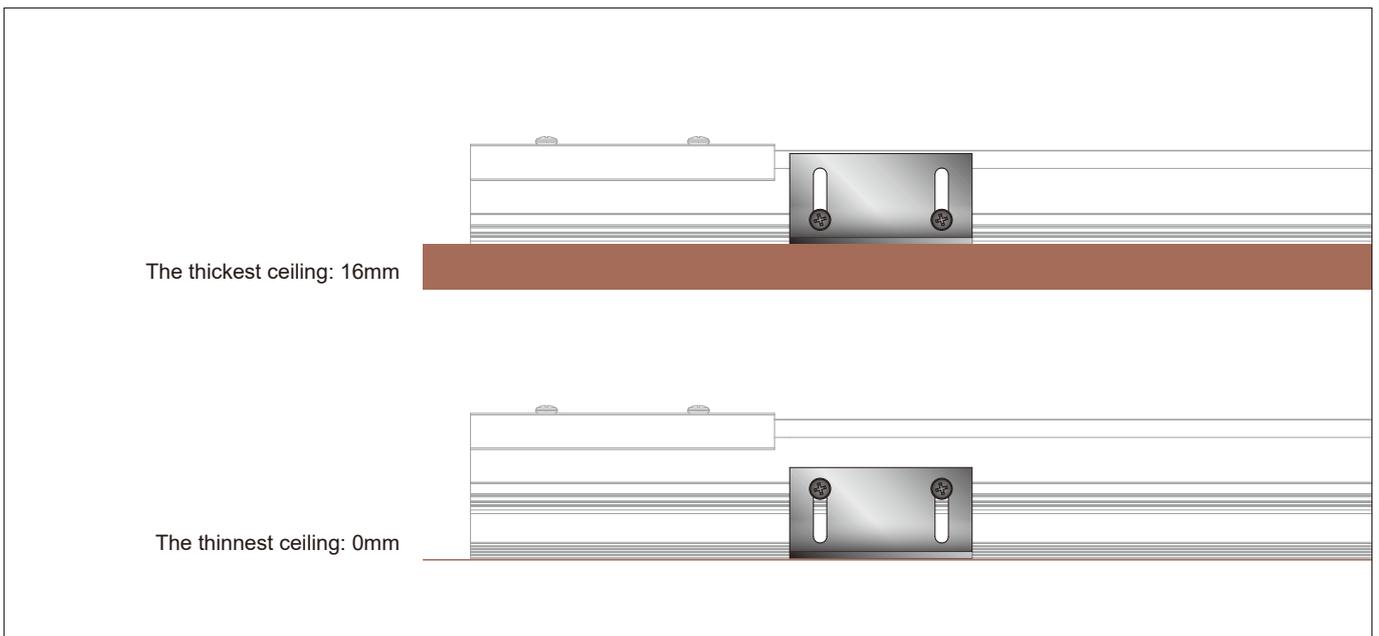


2. Adjust and install the L brackets according to ceiling board thickness.

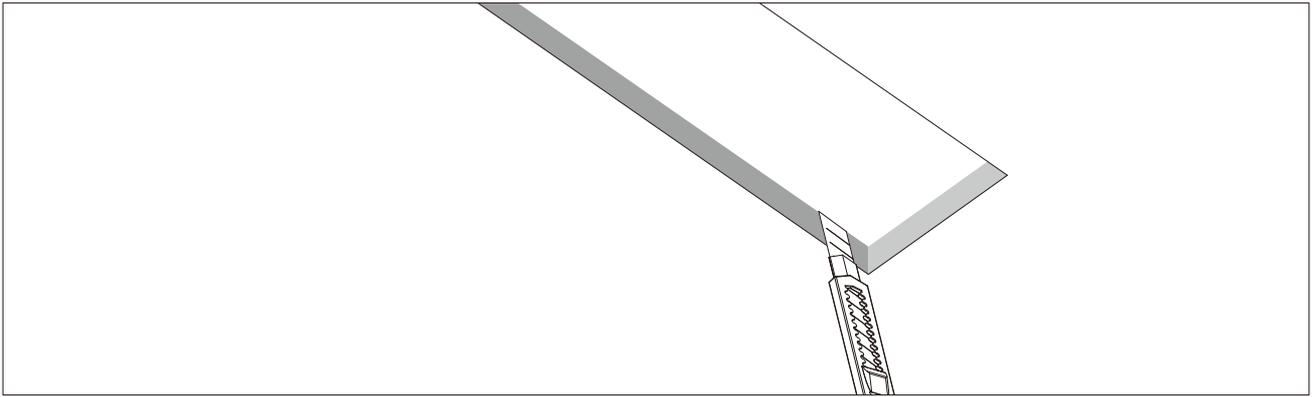


3 . Cut out required hole

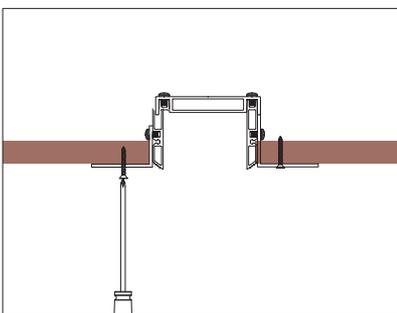

4. Lay it flat on the ceiling.Screw from the bottom of the ceiling (ceiling surface).

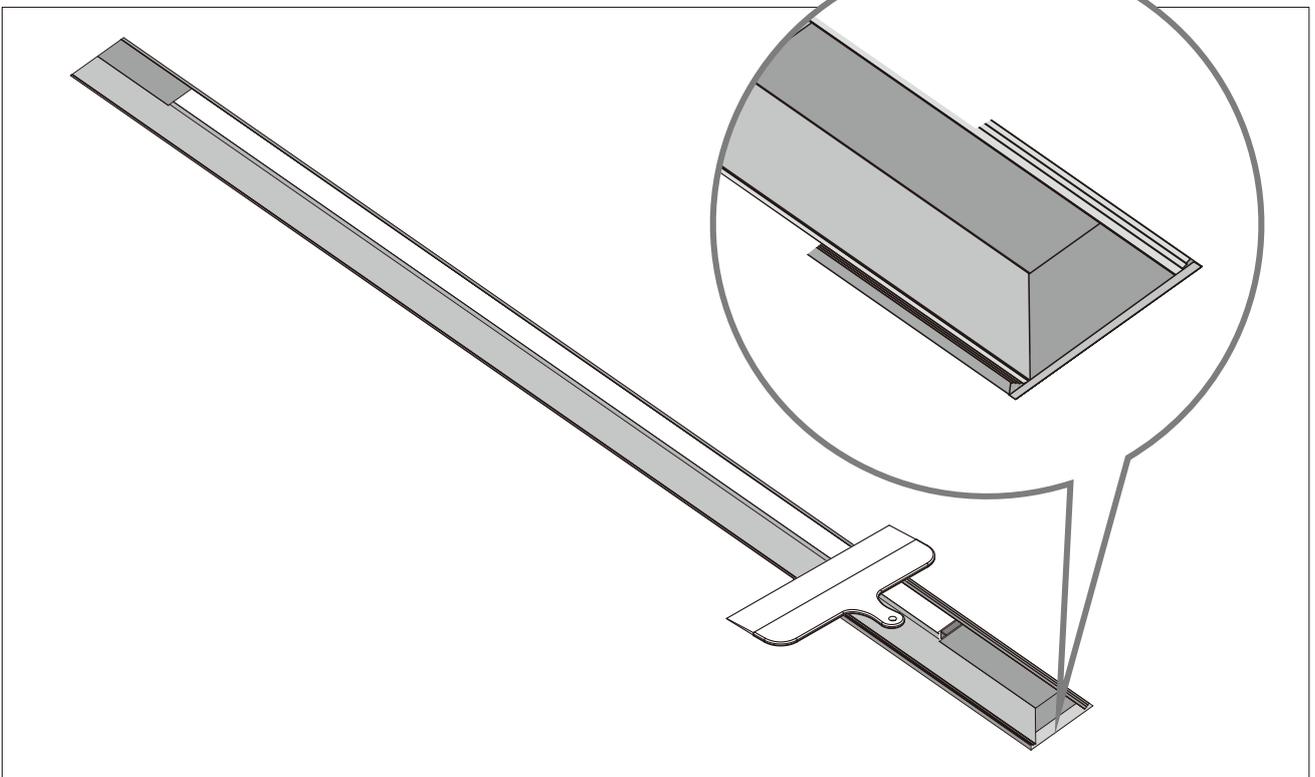


5. Patch up imperfections with ceiling plaster.

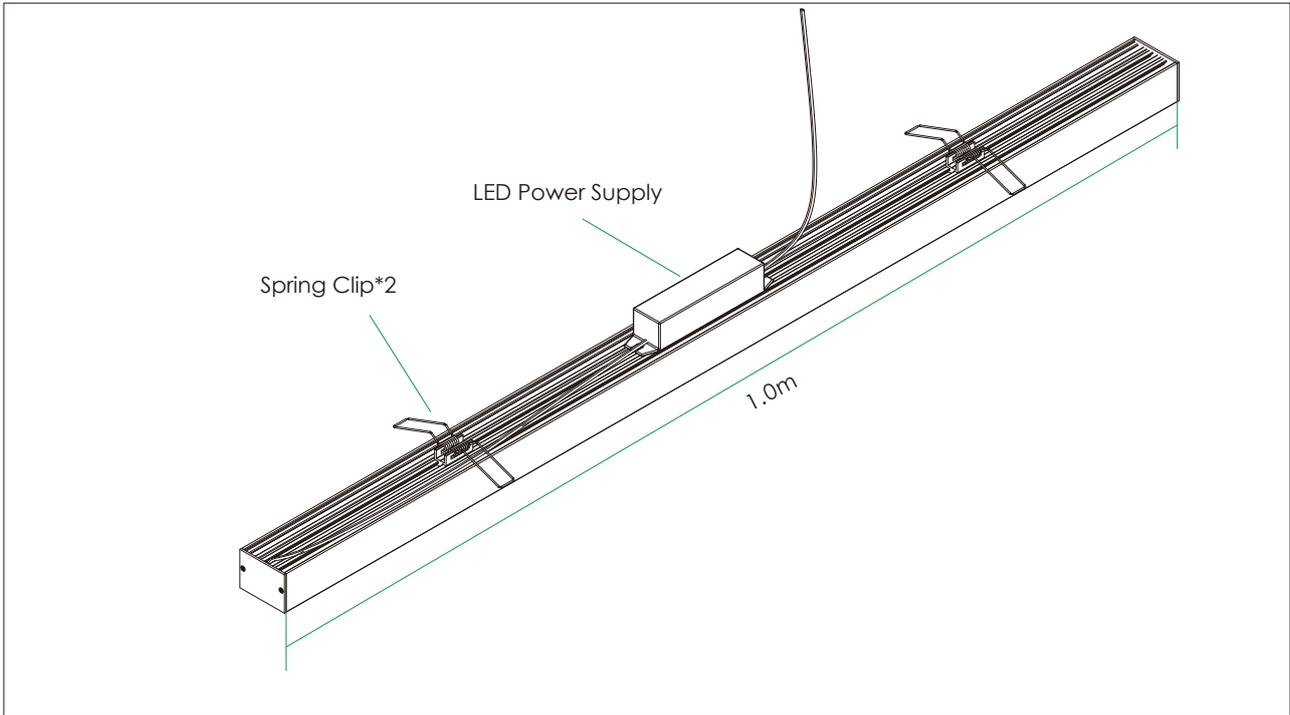


6. Using compatible linear profiles, prepare the light for install as below.


When ceiling is hollow, using spring clip to click

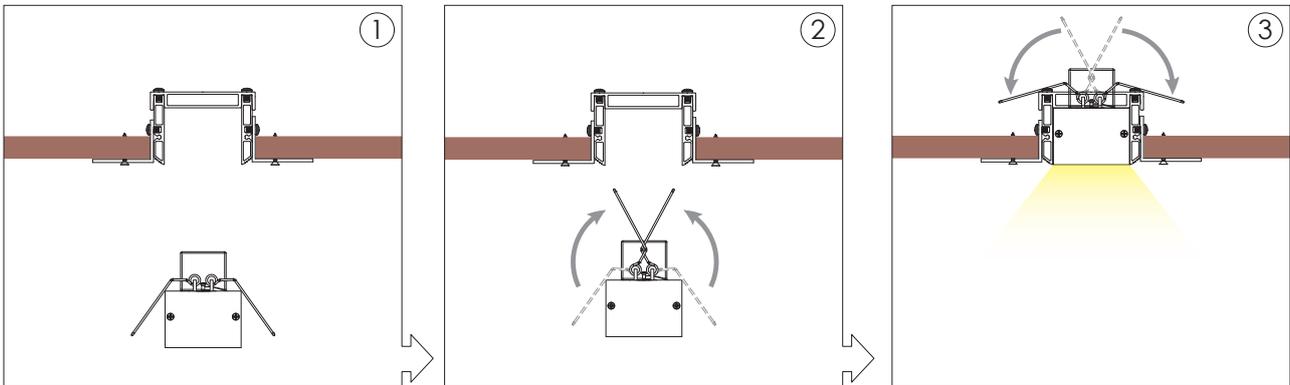

When ceiling is solid, using screw to fix to ceiling

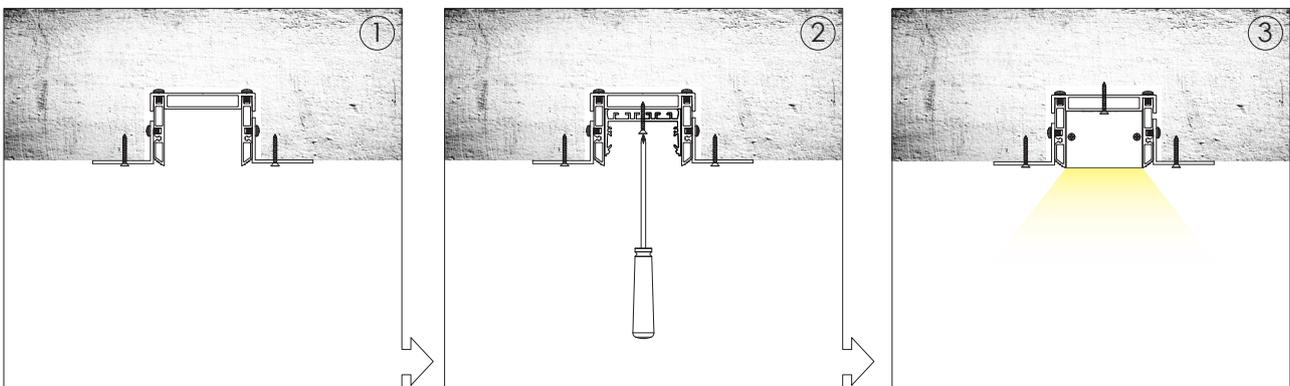

Compatible Trimless bar - TR35,TR50,TR60,TR80

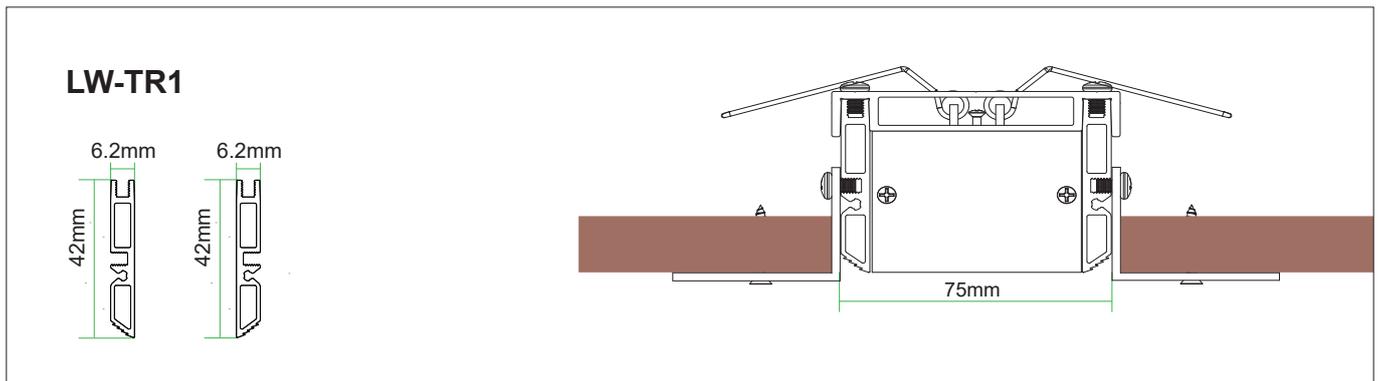

7.Install finished.