
LINEAR US20N NEW SERIES

Aluminium Profile

- Anti glare
- Uniform light control
- Beautiful and invisible appearance
- Save space
- Adapt to diverse scenarios







US20N-HB

(HB= Honeycomb lens)

US20N-G


(G= Grille lens)



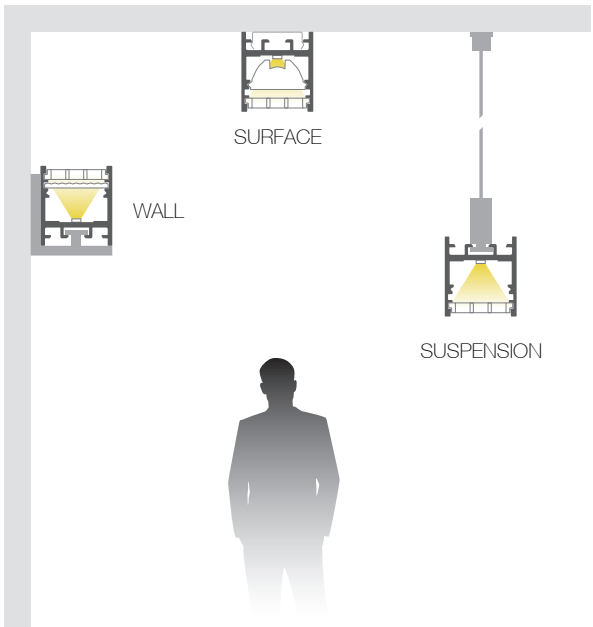


US20N-M

(M = Micro-prismatic diffuser)



US20N-30

(30 = 30 degree lens)



US20N-60

(60 = 60 degree lens)















Image	Code	Description	Length	Design Detail
	US20N	Linear alum.prof./Anodized	2000mm	
	-HB	Honeycomb lens (White light trans. >61%) (Black light trans. >40%)	203.7mm	
	-G	Grille lens (light trans. >61%)	203.7mm	
	-O	Opal diffuser (light trans. >65%)	Customized	
	-M	Micro-prismatic diffuser (light trans. >89%)	2000mm	
	-30	30 degree lens (light trans. >102%)	333.5mm	
	-60	60 degree lens (light trans. >106%)	333.5mm	
	CT4N J-90A CT4N J-90B CT4N J-180A	Joiners 90°A (optional) Joiners 90°B (optional) Joiners 180°A (optional)	-	
	US20N-Cap US20N-Cap-H	Aluminum CNC endcap without hole Aluminum CNC endcap with hole	-	
	US20N-CLIP-M	Metal clip	-	
	Sus.KitsA	Suspension Kits A-1.2M wire	1200mm	
	US20N-CLIP-WC	Wall clip	-	
		Different possible combinations as per your needs.		