
LINEAR WN31S RECESSED

Aluminium Profile

High-quality aluminum alloy material with a black anodized finish or powder coated to other colors.

Multi lens adapt to diverse light angle and scenarios.


- Recessed mounting
- Customizable
- Different types of optics, at 30° or 60°, to enhance visual comfort and ensure a low UGR
- Work Environment / IP Rating: IP20







WN31S-O



RECESSED



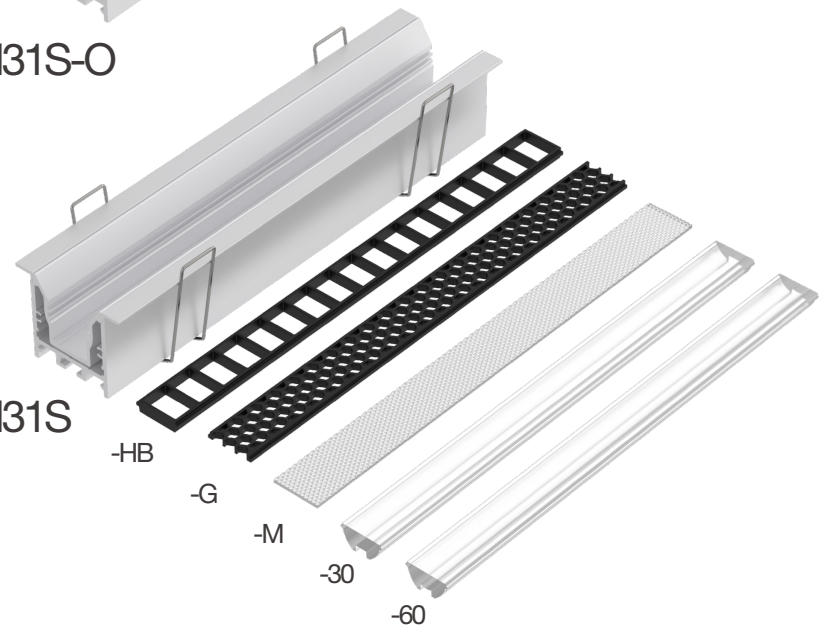








Image	Code	Description	Length	Design Detail
	WN31S	Silver anodized profile	1000mm	
	US20N-HB	Honeycomb lens (White light trans. >61%) (Black light trans. >40%)	1000mm (203.7mm x 5pcs)	 
	US20N-G	Grille lens (light trans. >61%)	1000mm (203.7mm x 5pcs)	 
	US20N-O	Opal diffuser (light trans. >65%)	1000mm	 
	US20N-M	Micro-prismatic diffuser, (light trans. >89%)	1000mm	 
	AT12N-C-30	30 degree lens (light trans. >102%)	1000mm (335mm/PC*3)	 
	AT12N-C-60	60 degree lens (light trans. >106%)	1000mm (335mm/PC*3)	 
	MC-WS31 (optional)	Metal clip	-	
	SC-WN31	Spring clip	-	
	WN31-CAP WN31-CAP-H	Aluminium screwless endcap with hole Aluminium screwless endcap without hole	-	
	J-90A J-90B J-120B J-180A	Joiners 90°A Joiners 90°B Joiners 120°A Joiners 180°A each piece (optional)	-	
		Different possible combinations as per your needs.		