LINEAR WP3N1 NEW SERIES


LEDWIDE
Linear and Curved Lighting Specialist


Aluminium Profile


High-quality aluminum alloy material with a black anodized finish or powder coated to other colors.

Multi lens adapt to diverse light angle and scenarios.

- Ceiling mounting / Suspension
- Customizable
- Different types of optics, at 30° or 60°, to enhance visual comfort and ensure a low UGR
- Work Environment / IP Rating: IP20












WP3N1-HB
(HB= Honeycomb lens)




WP3N1-G
(G= Grille lens)




WP3N1-HB-O
(O = Opal diffuser)




WP3N1-G-O
(O = Opal diffuser)




WP3N1-HB-30
(30 = 30 degree lens)




WP3N1-G-30
(30 = 30 degree lens)




WP3N1-HB-60
(60 = 60 degree lens)




WP3N1-G-60
(60 = 60 degree lens)



WP3N1-O-HB60
(HB= Honeycomb lens)





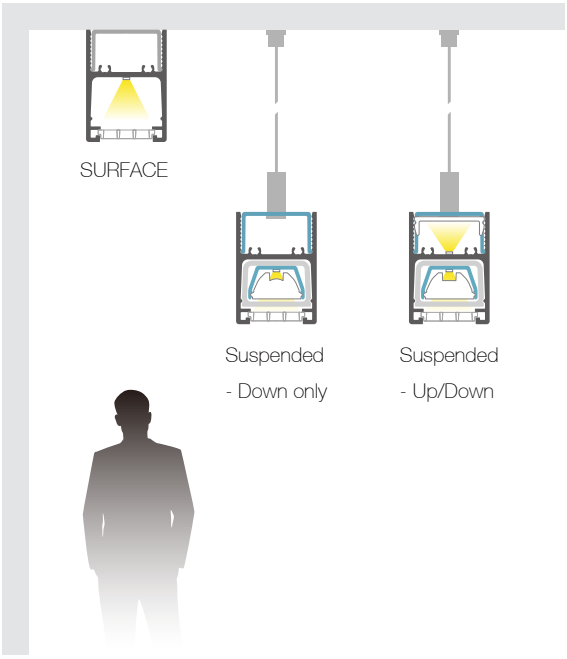









Image	Code	Description	Length	Design Detail
	WP3N1	Silver anodized profile	1000mm	
	US20N-HB	Honeycomb lens (White light trans. >61%) (Black light trans. >40%)	1000mm (203.7mm x 5pcs)	 
	US20N-G	Grille lens (light trans. >61%)	1000mm (203.7mm x 5pcs)	 
	WP3-O	Opal diffuser (light trans. >76%)	1000mm	 
	WP3-C	Clean diffuser (light trans. >94%)	1000mm	 
	AT12N-C-30	30 degree lens (light trans. >102%)	1000mm (335mm/PC*3)	 
	AT12N-C-60	60 degree lens (light trans. >106%)	1000mm (335mm/PC*3)	 
	WP3-MP	Aluminium Mounting Plate	50mm	 
	WP3-D-CAP WP3-D-CAP-H	Aluminium Endcap	-	
	WP3N1-CAP WP3N1-CAP-H	Aluminium screwless endcap with hole Aluminium screwless endcap without hole	-	
	Sus.KitsA (optional)	Suspension Kits A-1.2M wire	1200mm	