

Dongguan Houjie Keming Electronic Factory

Tel: 86-185 6613 8511

Fax: 86-769-85994676

Email: sales1@dgkeming.com.cn


Specifications of Dot Matrix LED display

Part: KEM-7057-AW

Features:

Dot diameter	1.9mm	Epoxy color	Water clear
Array	5*7	Pin configuration	Common Cathode
Surface color	Black	Emitting color	White

Package dimension& Internal circuit diagram

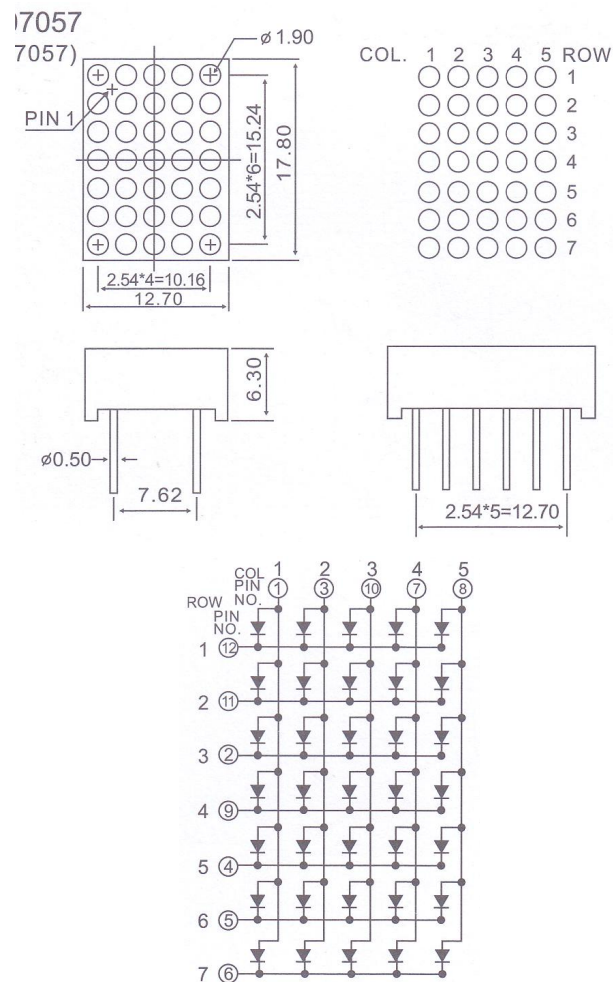

- . All dimensions are in millimeters (inches).
- .Tolerance is 0.25(0.01) unless otherwise noted.
- . Specifications are subject to change without notice.

Address: No.3 Gongye street, Baihao industrial district, Houjie town, Dongguan city, Guangdong, China

Dongguan Houjie Keming Electronic Factory

Tel: 86-185 6613 8511

Fax: 86-769-85994676

Email: sales1@dgkeming.com.cn

☆ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

ITEM	Amber	Super green	Super red	High red	Yellow green	Yellow	Blue	Pure green	White	UNIT
Power Dissipation (Pd)	52	50	40	36	44	42	66	66	66	mW
Peak Forward Current (Ifp)	100	100	100	100	100	100	100	100	100	mA
Continuous Forward Current(If)	20	20	20	20	20	20	20	20	20	mA
Reverse Voltage (Vr)	5	5	5	5	5	5	5	5	5	V
Reverse Current(Ir)	20	20	20	20	20	20	20	20	20	Ua
Operating Temperature Range(Ta)	-35~+85									°C
Storage Temperature Range(Tstg)	-35~+85									°C
Lead Solder Temperature	260°C for 3 sec									

☆ Color Code & Chip characteristic: (Test Condition: IF=20Ma)

Emitting Color	Peak Wavelength		Forward Voltage IF=20Ma (V)		Luminous Intensity IF=20Ma(mcd)
	(λp)	△λ	Typ	Max	Max
Amber	605-615	30	2.1	2.5	30
Super green	565-575	30	2.2	2.6	80
Super red	625-640	20	1.8	2.3	100
Ultra red	621-625	20	1.8	2.3	200
High red	640-660	20	2.1	2.5	12
Yellow green	570-580	30	2.2	2.6	45
Yellow	590-600	35	2.1	2.5	60
Blue	465-475	40	3.3	4.0	200
Pure green	515-525	40	3.3	4.0	200
White			3.3	4.0	180

Address: No.3 Gongye street, Baihao industrial district, Houjie town, Dongguan city, Guangdong, China