


Part number: Houkem-102510-RYG


Package dimension & Internal circuit diagram:

Dimension	10.1*25.5mm	Epoxy color	Milky white
Surface color	Black	Emitting color	Segment A, B :super red Segment C, D, E:yellow Segment J, I, H, G, F:super green

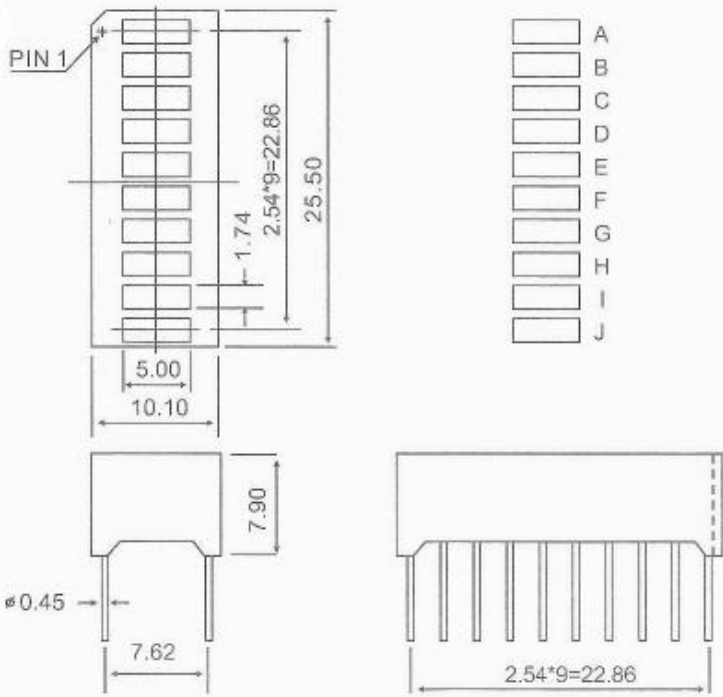

Notes:

- . All dimensions are in millimeters (inches).
- . Tolerance is 0.25(0.01) unless otherwise noted.
- . Specifications are subject to change without notice.

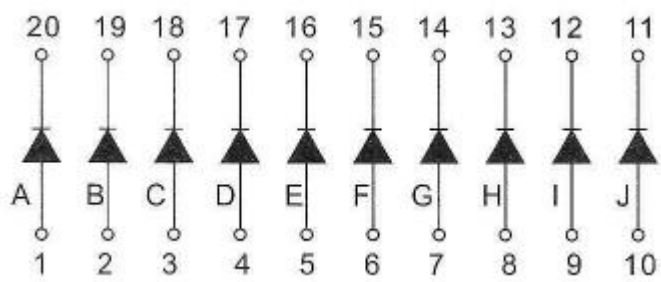

Segment A, B :super red

Segment C, D, E:yellow

Segment J, I, H, G, F:super green



Dongguan Houke Electronic Co., Limited

Tel: +8618825779357

www.dgkeming.com.cn

Email: sales3@dgkeming.com.cn

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

ITEM	Amber	Super green	Super red	High red	Ultra red	High red	Yellow green	Yellow	Blue	Pure green	White	Unit
Power Dissipation (Pd)	34	34	32	32	36	32	34	34	56	56	56	mW
Peak Forward Current(I _{fp})	100	100	100	100	100	100	100	100	100	100	100	mA
Continuous Forward Current(I _f)	18	18	18	18	18	18	18	18	20	20	20	mA
Reverse Voltage (V _r)	5	5	5	5	5	5	5	5	5	5	5	V
Reverse Current(I _r)	20	20	20	20	20	20	20	20	20	20	20	U _a
Operating Temperature Range(T _a)	-35~+85											°C
Storage Temperature Range(T _{stg})	-35~+85											°C
Lead Solder Temperature	260°C for 3 sec											

Color Code & Chip characteristic:

Emitting Color	Test Condition	Wavelength(nm)		Forward Voltage(V)		Luminous Intensity (mcd)	
		(λ _p)	Δλ	Typ	Max	Typ	Max
Amber	IF=18mA	600-605	30	1.9	2.0	100	110
Super green	IF=18mA	565-575	30	1.9	2.0	48	55
Super red	IF=18mA	630-635	20	1.8	2.0	110	130
Ultra red 2	IF=18mA	621-623	20	2	2.1	205	235
Ultra red 3	IF=18mA	620-625	20	2	2.1	300	320
High red	IF=18mA	638-660	20	1.8	1.9	15	20
Yellow green	IF=18mA	570-580	30	1.9	2.0	43	50
Yellow	IF=18mA	580-600	35	1.9	2.0	70	80
Blue	IF=20mA	465-475	40	2.8	3.0	150	200
Pure green	IF=20mA	515-525	40	2.8	3.0	260	300
White	IF=20mA	-	-	2.8	3.0	200	220



Dongguan Houke Electronic Co., Limited

www.dgkeming.com.cn

Tel: +8618825779357

Email: sales3@dgkeming.com.cn
