

Environmental



Passed various Tests



Fashion colors



100%B.C.F Yarn



colorfast



chair
roulettes



No edge ravel



Wear resistance



Dimensional stability



Long life-span



Easy to transport



Non-mold




LD-09



LD-10




LD-12

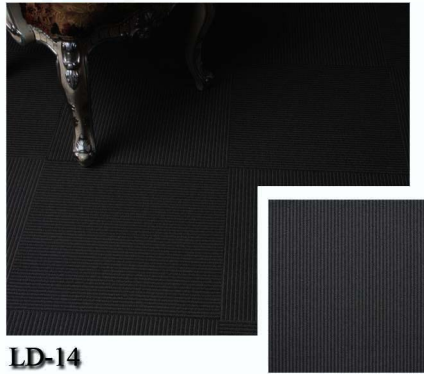

LD-14



LD-16

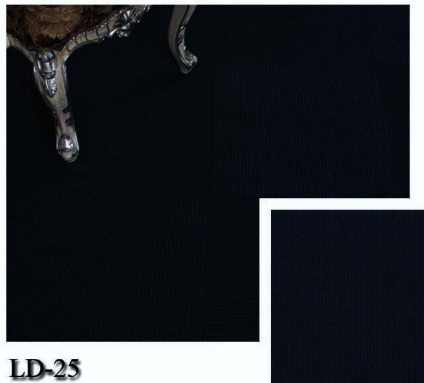


LD-25



LD-41



LD-42

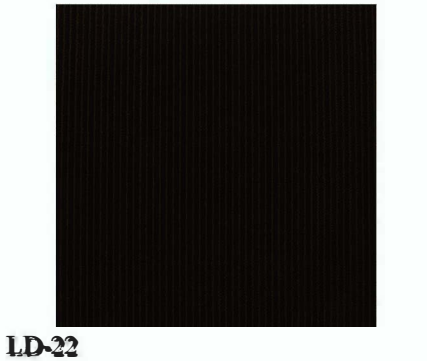

LD-22




Specification:

Construction: Multi-level Loop
 Pile Fiber: 100% BCF Polypropylene
 Dye Method: Solution dyed
 Gauge: 1/10 INCH
 Pile Weight: 19.2oz./sq.yd.(650g/Sq.m.)+/-5%
 Average Pile Height: 3.7+/-0.5mm
 Total Thickness: 6.5+/-0.5mm
 Primary Backing: Polyester spunbonded
 Backing Structure: Glass reinforced PVC
 Tile Size: 50cm*50cm

Performance:

Wear Classification: Heavy Contract
 Dimensional Stability: < +/-0.1%
 Color Fastness to Light: ISO105-B02 Grade 5 or higher
 Color Fastness to Rubbing: EN ISO 105-X12 Grade 4 or higher
 Static Electrical Resistance: Stage II (U30=0.7)
 Environmental Testing: Stage A
 (TVOC = 0.293 mg / sq.m.h ;
 Styrene=0.073mg/sq.m.h; No Formaldehyde;
 No 4-Phenylcyclohexene)

Slight color variation may occur from dye lot to dye lot.

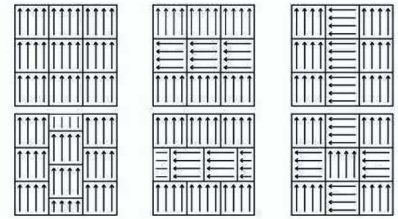

RECOMMENDED INSTALLATION METHOD

Production specifications are subject to normal manufacturing tolerances and may be changed without notice, performance is not adversely affected. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. All rights reserved. Karatiles cares about the environment. Karatiles, wherever possible, use recycled, recyclable and biodegradable materials. Please join us in our attempt to create a better environment for future generations.