IP65 LED Panel Light
PL66MH

CE

RoHS

IP 65

3 YEARS WARRANTY

100 lm/W

- Light Efficacy up to 100lm/W.
- Approved from CE/RoHS.
- Protection Grade: IP65.
- 3 years warranty.
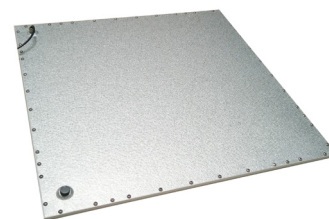
Specifications

OHD-PL66MH

Watt(W)	36
Product Size(mm)	595*595*10
Light Efficiency(lmW)	100
Input	AC220-240V 50/60Hz
Intrlligent Control	DALI 0/1-10V RX PWM
CCT(K)	3000-6500
PF	0.9
CRI(Ra)	80
Beam Angle	110°
Working Temperature	-20 ℃ ~ +50 ℃
Storing Temperature	-30 ℃ ~ +80 ℃
Protection Grade	IP65
Warranty	3 years

OHD-PL123MH

Watt(W)	36
Product Size(mm)	1195*295*10
Light Efficiency(lmW)	100
Input	AC220-240V 50/60Hz
Intrlligent Control	DALI 0/1-10V RX PWM
CCT(K)	3000-6500
PF	0.9
CRI(Ra)	80
Beam Angle	110°
Working Temperature	-20 ℃ ~ +50 ℃
Storing Temperature	-30 ℃ ~ +80 ℃
Protection Grade	IP65
Warranty	3 years

INTENSITY (cd)

UNIT:cd
C0/180 114.1°
C30/210 113.7°
C60/240 113.6°
C90/270 113.5°

AVERAGE BEAM ANGLE(50%):113.7 DEG
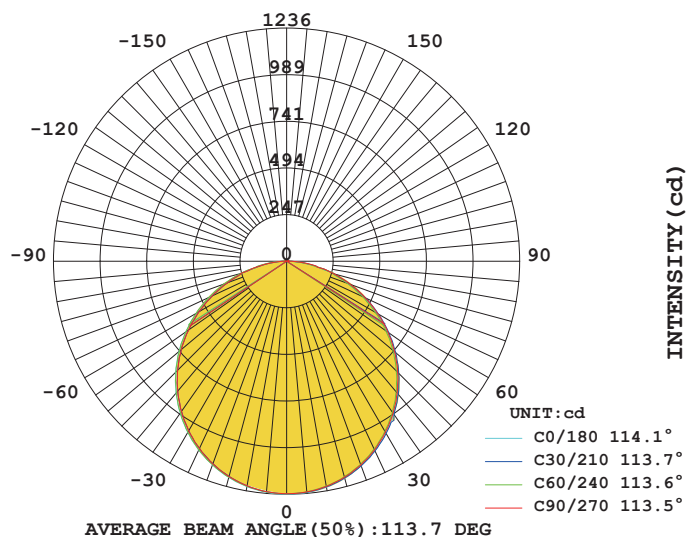
Dimension
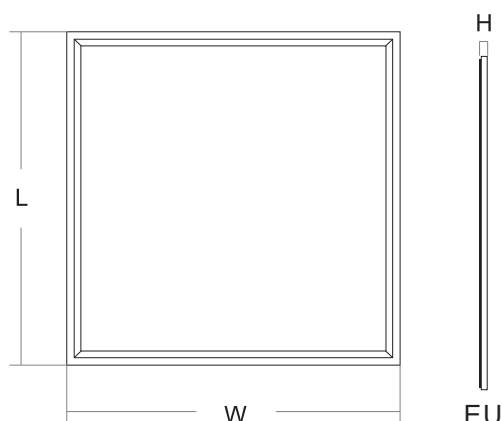
L595*W595*H10mm
L1195*W295*H10mm

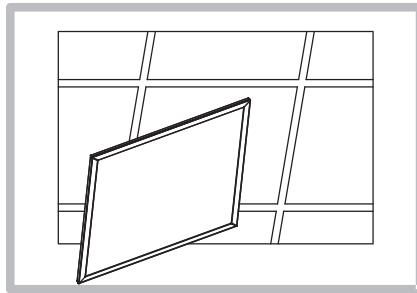- There will be slight deviation in the actual situation, which is subject to the actual situation.
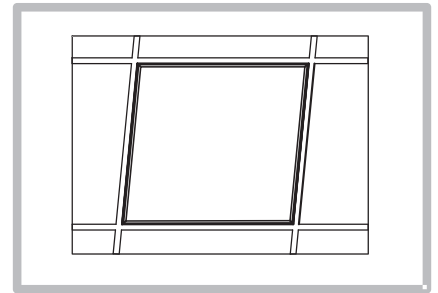
Method 1 Insert Installtion

- First please confirm the same size of panels and cei l ing and remove the plate of the cei l ing.
- Make the panels input wire connected with driver 's output wire.
- Ti lt the panels to the cei l ing diagonal ly into the cei l ing frame.
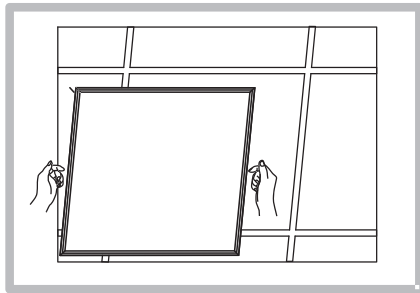
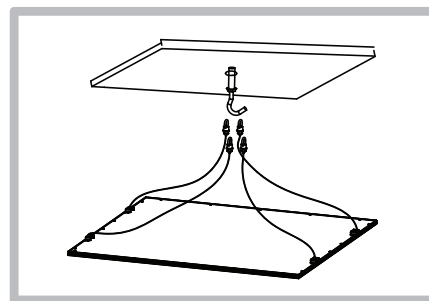| Step1	Step2	Step3

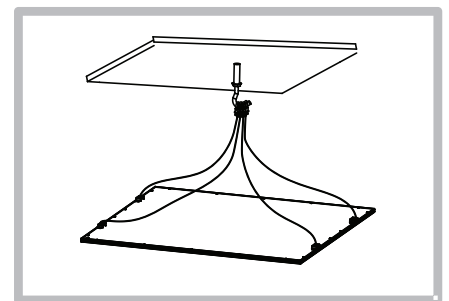## Method 2 Suspended Installtion

- Use electric dri l l to make a hole in the plaster cei l ing, and fix the expansion screw on it.
- Make the rope go through the hole of the holder on panel l ight.
- Make the rope go through the ring, and adjust to suitable length.
- Make the four rings hand on the expansion screw.
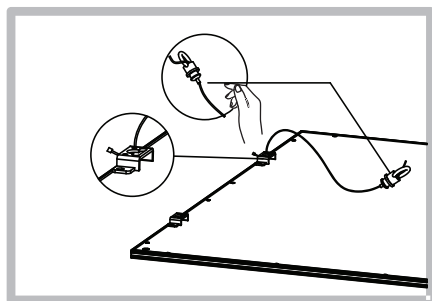
| Step1	Step2	Step3

Method 3 Surface Mounting Installtion

- The scattered aluminium frame instal lation 3pcs frame and fix it to cei l ing.
- Insert the panels into the frame in cei l ing.
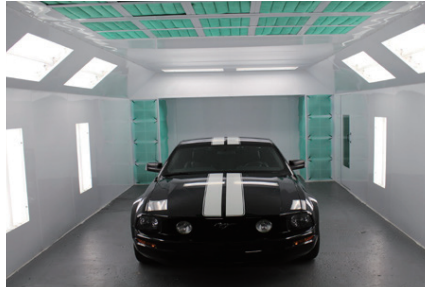- Assembl ing the final frame boarder.

Step1	Step2	Step3	Step4

Car wash Room

Car wash Room

PainAting workshop

Hospital

- Hospital
- Petrol station
- Shower room
- SPA room
- Station platform
- Food workshop
- Painging workshop
- Indoor swimming pool
- Subway station
- All humid environments