

Specification

Item: LED WALL LIGHT

Model No.: WL-21

Firm: Hunan Kontak Technology Co., Ltd



Application:

1. hallway / hotel
2. factories
3. garden / park
4. residential /institution building
5. school / hospitals
6. entertainment place




Feature:

- 1.It could be installed reversed .
- 2.Die-casting aluminum house
- 3.Excellent cooling system.
- 4.No mercury and lead contamination.
- 5.No RF interference
- 6.Anti-electromagnetic interference
- 7.Start fast, no flash,no different sound



Parameters

Model	WL-21
Power	6W 12W 20W
Shell color	black/white
Voltage	AC85V~265V/50-60HZ
Angle	20-120°
IP Rating	IP65
CCT	3000-6500K
Working Lifetime(Hour):	50000
Color rendering index	≥ 85
Light Resource	Bridgelux COB
Material	Aluminum alloy
LED luminous flux	680lm~720lm
Lamp size	100*100*100 mm, 120*120*120mm
Certification	CE,RoHS

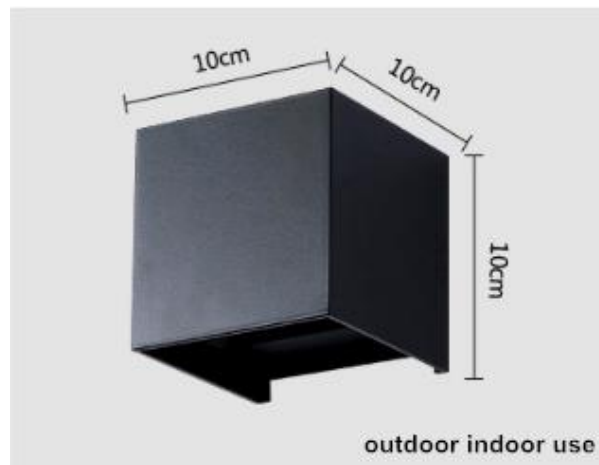

Caution

1.The lamp does not shine after installation.

- Check if it is working on the right voltage.
- Check if the electrode of the holder has good connection with the lamp.
- Change another lamp holder to test it, and then confirm whether this lamp is failure or not.
- Gently shake the LED lamp and listen if there is abnormal sound, to determine if led lamp is damaged during transport. If you find above problems, please contact dealer or manufacturer.

2. LED lamp is blinking .

- Bad connection on electrode, screw/insert once again or adjust the light-base's space to ensure good contact.
- Input voltages are wrong or unsteady, please confirm that voltage used under right scope,
- Components damaged by crash during transport, please contact dealer or manufacturer.

3.Parameters of actual product do not match specification sheet.

- Please check the testing instrument procedure.
- Different test instruments between the buyer and the manufacturer will lead to it.
- Some parameters of its own have tolerance, such as illumination, power, temperature, etc. If the actual parameters tested have greater difference with specification sheet, please contact dealer or manufacturer.

4. Maintenance.

- If need maintain, pls. use dry and soft cloth to clean it, wet cloth or organic solvents will damage the lamp and reduce its shell shine.