



## Operation instructions

## Product specifications

Display type	E-ink, electronic paper dot matrix
Display size	3.7inch
Display color	B/W/R
Resolution	240*416px
Product dimension	60×108×6mm
Casing color	white
Power	Powerless solution
Communication Protocol	NFC
Working temperature	0~40℃
Storage temperature	-20~60℃
Working humidity	10-90%RH
Dustproof and waterproof grade	IP54


## APP operation steps:

### 1. Update a single badge

1.1 Scan the QR code below to download the APP or search “XBadge” in Google Play/Apple Store



1.2 Open the APP, select a template

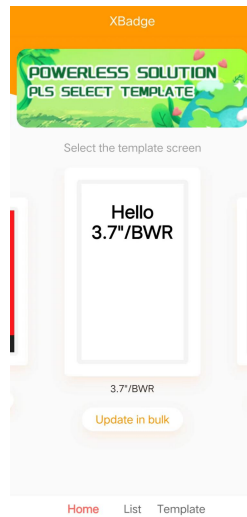


### 1.3 Select a name from the name list




### 1.4 Generate a display image and click send out



### 1.5 Put the mobile phone close to the badge, and the NFC position of the badge is as follows:

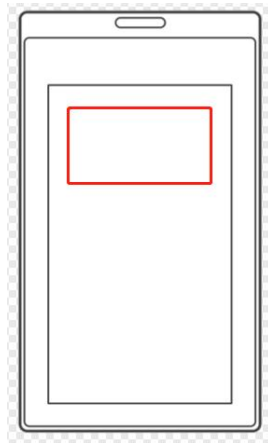


1.6 After the data transmission is completed, mobile phone can be removed, and the badge card refresh is completed

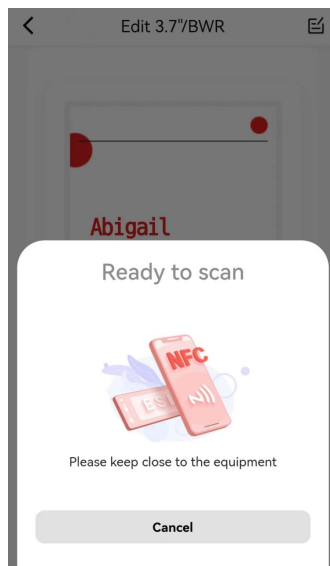


## 2. Batch update of multiple badges


2.1 Click "Update in bulk" at home page

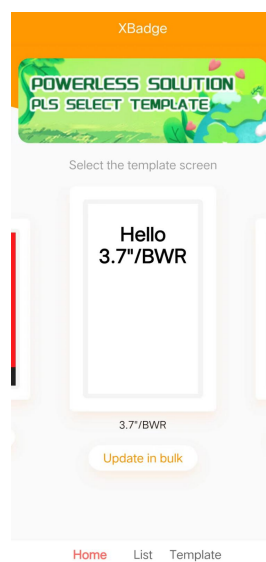

## 2.2 Select a template for batch update

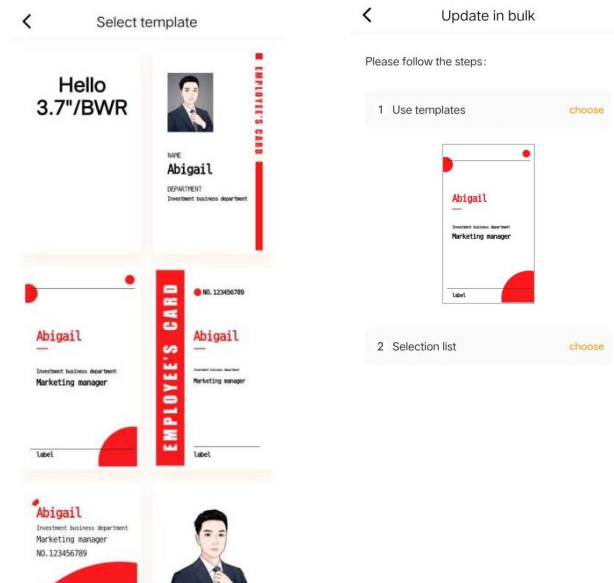

## 2.3 Select the list, the number of lists can be selected according to the number of devices

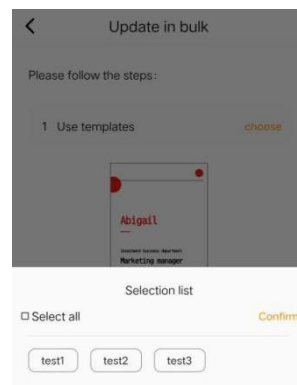


## 2.4 Click "Confirm",



## 2.5 To send data, put the mobile phone close to the device for transmission, and pay attention not to move

the mobile phone and the device during the transmission process

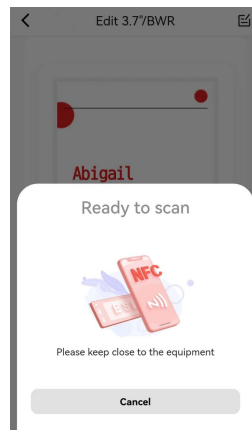

2.6 After one device is transferred, the transfer is followed by the second


### 3. List management

#### 3.1 Addition, deletion, modification and query of the list

#### 3.2 Batch import the list: download the form > Fill in list data > Upload form

## 4. Template management

### 4.1 Create a custom template(Click the "+" in the upper right corner to add a new template)

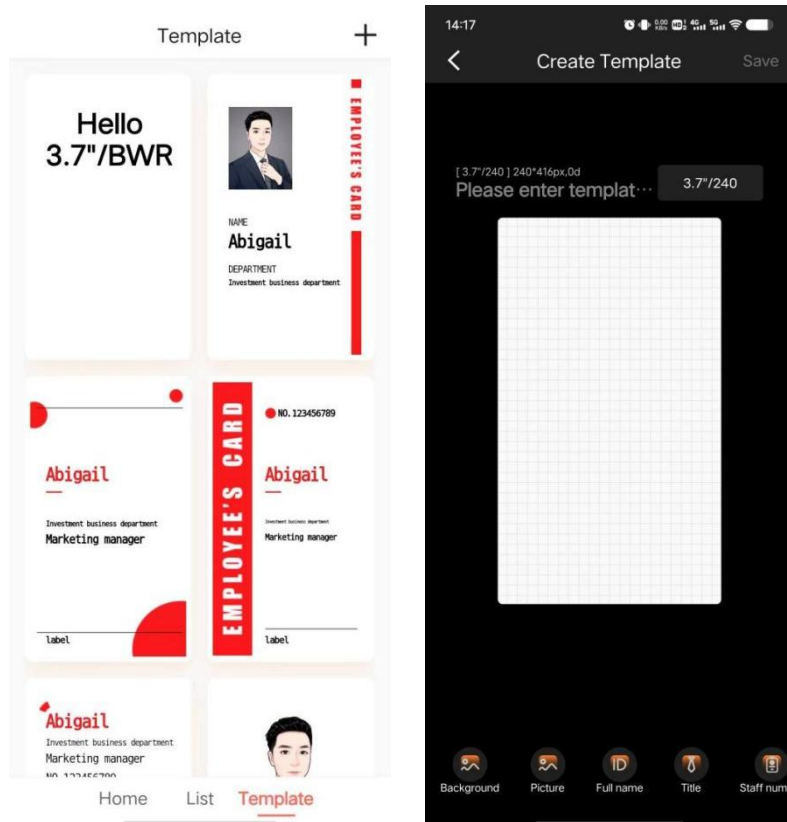

### 4.2 Delete a template

Pre-loaded templates are not allowed to delete, and you can delete the templates created by yourself.