

-150°C Freezer



BDF-150H128

Technical Parameters


Model	BDF-150H128	
Capacity	128L	
Temperature Range	-40~-150°C	
Temp. Accuracy	0.1°C	
Temp. Uniformity	≤5°C	
Temp. Stability	≤6°C	
Control System	Microprocessor control	
Display	7-inch LCD touch screen	
Alarm	High temperature alarm, low temperature alarm, abnormal power supply alarm, sensor fault alarm, filter check alarm, ambient temperature alarm, condenser fault alarm	
Refrigeration Type	Direct-cooling	
Refrigerant	R4001, 2000g	
Compressor	Compressor of French origin/1	
Condenser & Evaporator	copper tube finned condenser; copper tube coil evaporator,	
Defrost	Manual defrost	
Construction	High density polyurethane foam, CFC free	
Material	Internal Material	304 stainless steel
	External Material	Sprayed steel plate
Door	Outer door: sprayed steel plate door*1 Inner door: XPS extruded polystyrene foam board door*1	
Consumption	3125W	
Power Supply	AC 220V,50/60Hz(Standard); 110V,50/60Hz(Optional)	
Casters	Yes	
Shelf	/	
Standard Accessory	USB interface, remote alarm terminal, manometer, test port	
Optional Accessory	Temperature recorder, liquid nitrogen backup system	
Internal Size(W*D*H)	500*450*578mm	
External Size(W*D*H)	1560*957*1178mm	
Package Size(W*D*H)	1637*970*1383mm	
Net Weight	245kg	
Gross Weight	340kg	

Freezer Racks




BK-LD4x4

Vertical Freezer Rack

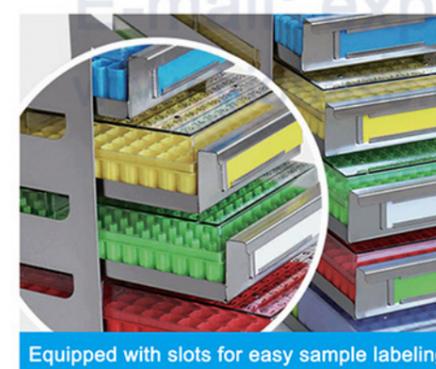

Equipped with slots for easy sample labeling

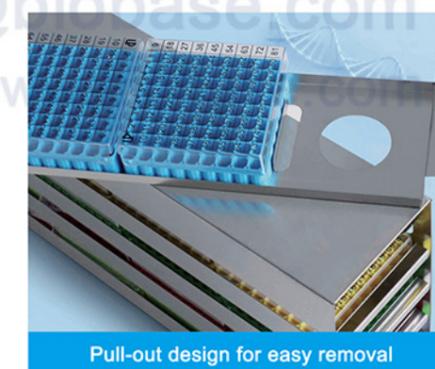

Pull-out design for easy removal



Ergonomic round handle prevents hand strain during use



Equipped with insertion rods to prevent box falling