

Add: 10-2-101 Fenghexinyuan Nankai District Tianjin China
Tel:+86 22 87348386 Web:www.newroc-phe.com E-mail:info@newroc-phe.com

Perfect Replacement For ALFA LAVAL Plate Heat Exchanger Gasket

Perfect product needs perfect material, strictly control the production and strict delivery inspection. We strictly enforce the requirements of ISO9000, and strictly control every aspect of production, so that each Gasket has can be traced back.

After years of efforts in the OEM and aftermarket we have now accumulated more than 400 types of PHE Gasket mold, and meet gasket EPDM, NBR, VITON manufacturing and they meet FDA standards.

NEW ROC supplies ALFA LAVAL heat exchanger gaskets replacements. We have now accumulated more than 40 types of ALFA LAVAL PHE Gasket mold.

NEW ROC supplies high quality plate heat exchanger spares, including both gaskets and plates replacement for plate and frame heat exchanger or gasketed plate heat exchanger.

The gaskets and plates are specified to fit most plate heat exchanger makes and models for replacement.


Standard Materials

For PHE gaskets, the standard materials are Nitrile rubber (NBR), EPDM and VITON. **We also supply FDA gaskets** for sanitary plate heat exchangers, plate pasteurizers.

ALFA LAVAL Model List as below.



Models	A=mm	B=mm	Assembling Type
M3	375	60	Clip Lock
M6	640	140	Clip Lock
M6M	640	140	Clip Lock
M10B	871	371	Clip Lock
M10M	871	371	Clip Lock
M15B	1294	298	Clip Lock
M15M	1294	298	Clip Lock

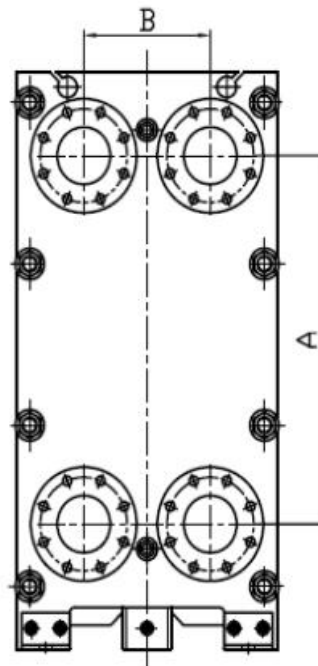

T20B	1478	353	Clip Lock
T20P	1478	353	Clip Lock
M20M	1478	353	Clip Lock
MX25B	1939	439	Clip Lock
MX25M	1939	439	Clip Lock
M30	1842	596	Glue Type
TL3B			Clip Lock
TL3P			Clip Lock
TL6B	1036	140	Clip Lock
TL10B	1338	218	Clip Lock
TL10P	1338	218	Clip Lock
TS6M	380	203	Clip Lock
TS20M	699	363	Clip Lock
CLIP6	859	130	Clip Lock
CLIP8	1095	220	Clip Lock
CLIP10	1324	324	Clip Lock
M6MW	640	140	Glue Type
M10BW	719	225	Glue Type
M15BW	1294	298	Glue Type
T20MW	1478	353	Glue Type
MA30W	1811	561	Glue Type
A15B	1315	350	Button Lock
AK20	930	365	Clip Lock

P16	367	60	Glue Type
P26	592	135	Glue Type
P36	946	226	Glue Type
AM10	1046	290	Glue Type
AM20	1450	365	Glue Type
AM20B	1450	365	Glue Type
TS35P			Clip Lock
EC500			Clip Lock
T5B	546	101	Clip Lock
T5M	553	100	Clip Lock
T8B			Clip Lock
T8M			Clip Lock
TL15B			Clip Lock
TL35B			Clip Lock
AC400			Glue Type
AC600			Glue Type

The materials we can provide and the color identification

The Basic Performance For Gasket				
Material	Color code	Max Use Temperature	Hardness	Application Media
NBR	1 line blue	120°C	76±2	alkane, alkane and other non-polar media, fuel oil and other mineral oil; lubricants; animal and vegetable oils; hot water, salt water, etc
NBR-HT	2 line blue	140	76±2	
HNBR	1 line red 1 line blue	150°C	76±2	

EPDM	1 line yellow	150°C	80±2	Water, steam, atmospheric ozone, non-petroleum-based; ketone; alcohols polar medium;etc
HEPDM	1 line red 1 line yellow	170°C	80±2	
VITON A	1 red	180°C	80±2	acid,alkali,organic solvent,hot oil
VITON A (OIL)	1 line gray 1 line red			
VITON B	2 line red			
VITON G	3 line red	200°C	80±2	strong acid,hot oil saturated steam hot oil
AFLAS	2 line purple	200°C	80±2	strong alkali,hot oil saturated steam hot oil
CR	1 line gray	-40~60°C	75±2	refrigerant

