




WUHAN JIANGNAN ANCHOR CHAIN CO.,LTD

STUDLINK CHAIN MARINE

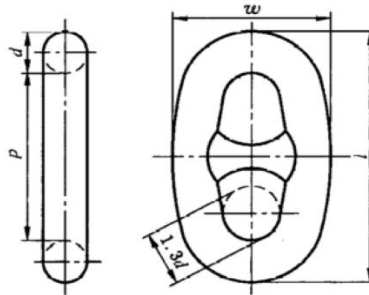

$$l \approx 6d, p \approx 4d, w \approx 3.6d。$$

<i>size(d)</i>	<i>l</i>	<i>p</i>	<i>w</i> (mm)
12.5	75	50	45
14	84	56	50
16	96	64	58
17.5	105	70	63
19	114	76	68
20.5	123	82	74
22	132	88	79
24	144	96	86
26	156	104	94
28	168	112	101
30	180	120	108
32	192	128	115
34	204	136	122
36	216	144	130
38	228	152	137
40	240	160	144

<i>size(d)</i>	<i>l</i>	<i>p</i>	<i>w</i> (mm)
42	252	168	151
44	264	176	158
46	276	184	166
48	288	192	173
50	300	200	180
52	312	208	180
54	324	208	187
56	336	224	202
58	348	232	209
60	360	240	216
62	372	248	223
64	384	256	230
66	396	264	238
68	408	272	245
70	420	280	252
73	438	292	263

phone +86-27-81813332
+86 15871818202

Email jnml@jnml.cn
demi@jnml.cn

Chain Diameter(mm)	<u>Proof Load(KN)</u>		<u>Break Load(KN)</u>		Weight of Per length 27.5m
	Grade II	Grade III	Grade II	Grade III	
12.5	66	92	92	132	95
14	82	116	116	165	125
16	107	150	150	216	160
17.5	127	179	179	256	190
19	150	211	211	301	225
20.5	175	244	244	349	265
22	200	280	280	401	300
24	237	332	332	476	360
26	278	389	389	556	420
28	321	449	449	642	490
30	368	514	514	735	565
32	417	583	583	833	635
34	468	655	655	937	720
36	523	732	732	1050	800
38	581	812	812	1160	879
40	640	895	895	1280	980
42	703	981	981	1400	1082
44	769	1080	1080	1540	1188
46	837	1170	1170	1680	1298
48	908	1270	1270	1810	1413
50	981	1370	1370	1960	1526
52	1060	1480	1480	2110	1645
54	1140	1590	1590	2270	1774
56	1220	1710	1710	2430	1906
58	1290	1810	1810	2600	2051
60	1380	1940	1940	2770	2194
62	1470	2060	2060	2940	2338
64	1560	2190	2190	3130	2492
66	1660	2310	2310	3300	2650
68	1750	2450	2450	3500	2836
70	1840	2580	2580	3690	2982
73	1990	2790	2790	3990	3274