

## 果冻胶 ( 啫喱胶 ) Jelly glue 1-3

- HF-301 手工慢干型  
manual slow drying type
- HF-303 手工中速型  
manual medium speed
- HF-305 手工中速高档型  
manual medium speed, top grade
- HF-505 长条皮壳机( 一分钟30个左右 )  
long crusher (about 30 pieces a minute)
- HF-507 摇头皮壳机 (一分钟30个左右)  
head leather machine (about 30 pieces a minute)
- HF-508 天地盖自动机 (一分钟30个左右)  
Sky cover automata (about 30 pieces a minute)
- HF-509 高速皮壳机 (一分钟30-60个)  
high speed skin crusher (about 30 to 60 per minute)

## 纸塑胶 ( 水基胶 ) Paper plastic (water-based glue) 4

- HF-8511 糊盒胶  
paste box glue
- HF-8599 高档精裱胶  
top quality finish mounted glue

## 封口胶 ( 搭口胶 ) Sealant (with glue) 5-6

- HF-905 手工胶  
handmade glue
- HF-909 机器手工通用型  
machine is manual
- HF-1031 裱衬胶  
mounted rubber
- HF-1031A 高档白胶  
a high-grade white glue

## 手工机用胶

产品型号	外 观	固含量	用 途	备 注
HF-301	微黄色	66以上	机器上胶人工糊机	适合中国的北方干燥天气,在湿度10-70%以下,比较好用
HF-303	微黄色	70以上	机器上胶,人工糊盒及半自动糊盒	适合中国的北方干燥天气,在湿度10-70%以下,比较好用
HF-305	微黄色	65以上	机器上胶,人工糊盒及半自动糊盒	适合中国南方湿度在30%-90%
HF-306	微黄色	65以上	机器上胶,人工糊盒及半自动糊盒	适合中国南方湿度在30%-90%

### Glue for manual machine

Product model	appearance	Solid content	use	note
HF-301	The micro yellow	above 66	artificial pasting box	machine is suitable for dry weather area, where moisture is 10-70% Here, it works better
HF-303	The micro yellow	above 70	artificial pasting box and semi-automatic pasting box	machine is suitable for dry weather area, where moisture is 10-70% Here, it works better
HF-305	The micro yellow	above 65	the gluing machine, artificial pasting box and semi-automatic pasting box	pasting box Suitable for wet weather region, humidity from 30% to 90%
HF-306	The micro yellow	above 65	the gluing machine, artificial pasting box and semi-automatic pasting box	pasting box Suitable for wet weather region, humidity from 30% to 90%


**用 途:** 应用于印刷包装、酒盒、鞋盒、内衣盒、茶叶盒、手机盒等高档包装礼品盒及各类像册、精装书本皮壳、等的制造, 具有固化速度快可令纸板硬度提高的特点, 只适用于具有加热设备的手工机器及半自动机器。

**注意事项:** 1、在使用时, 尽量把胶水调薄,把胶机温度开到85℃~95℃ ( 胶机显示90℃, 实际胶液的温度只有75℃左右 ),只有胶水实际温度达到75℃以上, 才能使胶水达到最佳状态。

**注意事项:** 在梅雨季节, 生产车间的空气湿度高于90% 以上时, 请慎用,湿度高于90%以上时, 胶水粘度就会下降, 出现不粘或开胶现象, 做好的产品 ( 盒子 ) 请放在防潮仓库以免受潮, 使盒子起泡、发黑。

**检 测:** 本产品已通过SGS测试

**保 质 期:** 一年 ( 必须贮藏在阴凉干燥处, 避免高温和阳光照射, 最佳贮藏温度18-30 ℃ )

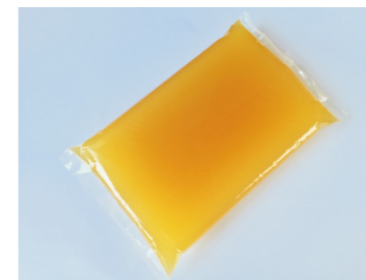

Use: applied to printing packaging, wine box, shoe box, underwear box, tea Box, cell phone box and other high-grade package gift box and all kinds of picture book, essence The manufacture of books leather case, etc., is fast and fast  
The characteristics of hardness of cardboard are applicable only to heating equipment  
Manual machines and semi-automatic machines.  
Note: 1. When using, try to keep the glue thin and keep the machine temperature open  
To 85 ℃ ~ 95 ℃ (glue machine according to 90 ℃, the actual adhesive solution temperature Degree of only about 75 ℃ ), only glue the actual temperature of 75 ℃  
All of these will make the glue to the best state.

Note: during the plum rain season, the air humidity in the production workshop is above 90%  
When you are on the top, please use your caution when humidity is above 90%  
The product (box) should be placed in a moisture-proof warehouse to prevent moisture and make the box blister and black.  
Test: this product has been tested by SGS  
Protect quality period: one year (must be stored in a cool, dry place, avoid high temperature and sunlight, the best storage temperature 18 to 30 ℃)

## 机用快干胶

产品型号	外 观	固含量	用 途	备 注
HF-505	微黄色	63以上	长条皮壳机	一分钟30个左右
HF-507	微黄色	55以上	摇头皮壳机	一分钟30个左右

### Machine with quick-drying glue

Product model	appearance	Solid content	use	note
HF-505	The micro yellow	above 63	the leather case machine	About 30 pieces a minute
HF-507	The micro yellow	above 55	the leather case machine	About 30 pieces a minute


**用 途：**用于全自动皮壳封面机、酒盒面板、手机盒面板、笔记本面板等高档包装礼品盒及各类像册、精装书本皮壳等的制造，适用于具有加热设备的半自动及全自动机器。

**使用说明：**1、在使用时一定要把胶机温度开到65℃至85℃（夏天65℃至75℃，冬天75℃至85℃）  
2、不同的纸张、材料有不同的性能，使用本产品前请先试用，以免造成不必要的损失。（比如有蜡的中纤板等）。

**检 测：**本产品已通过SGS测试


**保 质 期：**两年（必须贮藏阴凉干燥处，避免高温和阳光照射，最佳贮藏温度0-30℃）

Use: used for automatic leather case cover machine, laptop, mobile phone box, wine box, panel panel panel high-grade packaging gift boxes and all kinds of photo album, hardcover books, such as the manufacturing of items such as leather case, suitable for semi-automatic and fully automatic machine with heating equipment.  
Directions for use: 1, when use must make gum machine temperature to 65℃ to 85℃, 65℃ to 75℃ in summer, winter 75℃ to 85℃)  
Different paper and materials have different properties. Please try before using this product to avoid unnecessary loss. (for example, the wax board and so on).  
Test: this product has been tested by SGS  
Shelf life: two years (must be stored in a cool, dry place, avoid high temperature and sunlight, the best storage temperature 0 to 30℃)

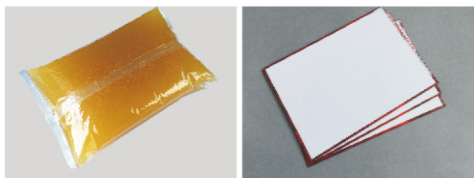

**HF-505长条皮壳机（一分钟30个左右）**

HF-505 long crusher (about 30 pieces a minute)

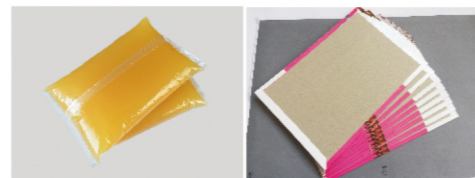

**HF-507摇头皮壳机（一分钟30个左右）**

HF-507 head leather machine (about 30 pieces a minute)



**长条皮壳机(机样图片)**

the leather case machine (machine sample picture)



**摇头皮壳机(机样图片)**

the leather case machine (machine sample picture)

## 机用快干胶


产品型号	外 观	固含量	用 途	备 注
HF-508	微黄色	63以上	天地盖自动机	一分钟30个左右
HF-509	微黄色	50以上	高速皮壳机	一分钟30-80个

### Machine with quick-drying glue

Product model	appearance	Solid content	use	note
HF-508	The micro yellow	above 63	the world is self-motivated	About 30 pieces a minute
HF-509	The micro yellow	above 50	high speed crusher	About 30 to 80 pieces a minute

### HF-508天地盖自动机（一分钟30个左右）

HF-508 sky cover automata (about 30 pieces a minute)

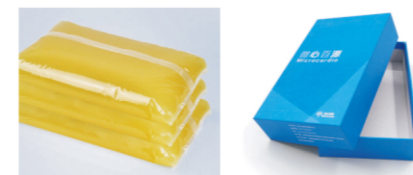

**天地盖自动机(机样图片)**

The earth and the earth (machine sample)

**用 途：**应用于天地盖自动成型机包装盒、酒盒，鞋盒、内衣盒、茶叶盒、手机盒等高档包装礼品盒及各类天地盖的制造，干燥速度快、粘性强、可粘膜，生产效益高。

**检 测：**本产品已通过SGS测试

**保 质 期：**两年（避免高温和阳光照射，最佳贮藏温度0-30℃）

Use: used in the heavens and the earth cover automatic molding machine box, wine box, shoes box, underwear box, tea box, mobile box of high-grade packaging gift boxes and manufacturing of all kinds of cover of heaven and earth, High drying speed, high viscosity, mucous mucous membrane, high production efficiency.  
Test: this product has been tested by SGS  
Shelf life: two years (to avoid high temperature and sunlight, the best storage temperature 0 to 30℃)

### HF-509高速皮壳机（一分钟30-60个）

HF-509 high speed skin crusher (about 30 to 60 per minute)


**用 途：**用于全自动皮壳封面机、酒盒面板、手机盒面板、笔记本面板等高档包装礼品盒及各类像册、精装书本皮壳等

**使用说明：**在使用时一定要把胶机温度开到65℃至85℃（夏天65℃至75℃，冬天75℃至85℃）

**检 测：**本产品已通过SGS测试

**保 质 期：**两年（避免高温和阳光照射，最佳贮藏温度0-30℃）

Use: used for automatic leather case cover machine, laptop, mobile phone box, wine box, panel panel panel such as high-grade leather case packaging gift boxes and all kinds of photo album, hardcover books, etc  
Instructions: when use must make gum machine temperature to 65℃ to 85℃, 65℃ to 75℃ in summer, winter 75℃ to 85℃)  
Test: this product has been tested by SGS  
Shelf life: two years (to avoid high temperature and sunlight, the best storage temperature 0 to 30℃)

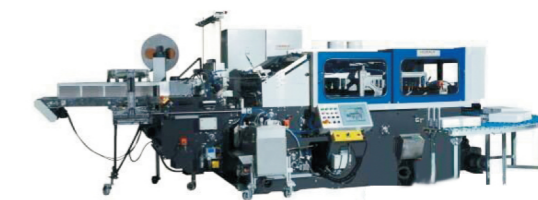

**高速皮壳机(机样图片)**

High speed leather case machine (machine sample picture)

纸 塑 胶(高档精裱胶)

产品型号	外 观	固含量	粘 度cps	用 途
HF-8511	乳白色	50 ± 2.5	6000 ± 50	用于酒盒包装等高档礼盒
HF-8599	乳白色	55 ± 2.5	6500 ± 50	用于塑胶盒包装等高档礼盒

Paper plastic (top quality finish mounted glue )

Product model	appearance	Solid content	cps	use
HF-8511	Milk white	50 ± 2.5	6000 ± 50	used in liquor box packing and other high-end gift boxes
HF-8599	Milk white	55 ± 2.5	6500 ± 50	used in plastic box packing and other high-end gift boxes

**用 途：**用于印刷包装、酒盒（专用）、胶盒、PVC、PET膜、鞋盒、衬衫盒、像册、精装书本皮壳，等（高档包装）的制造。适合于手工、半自动机器及各种全自动天地盖机器、全自动皮壳机等机器使用，可用于果冻胶及其它胶水解决不了的产品。

**特 性：** 1、粘力强、不开胶，粘合后很快形成一层干的脱膜，能增强包装盒的挺度、不变形。  
2、粘好后不发霉，防腐能力强，易清洗（可用水直接清洗）、具有阻燃防火功能。

**一、本产品通过SGS检测报告，不含甲醛，为环保新型产品，是包装行业的首选产品。**

**二、包装25kg 50kg/桶**

**三、保质期：**一年（最佳贮藏温度10至30度）

Use: used in printing and packaging, wine box (special), plastic boxes, PVC, PET film, shoe boxes, shirt boxes, leather case, photo album, hardcover books, such as high-grade packaging manufacturing. Suitable for manual, semi-automatic machine and all kinds of automatic machine, automatic leather case machine, etc.

Products that can be used for jelly and other glue.

Special: 1, strong adhesion, no gelatine, soon formed a dry strip of film, which can enhance the shape of the box and not deform.

The adhesion is not mouldy, the anti-corrosion ability is strong, easy to clean (clean with water direct cleaning), have fire retardant fire protection function.

One, this product through SGS detection report, not contain formaldehyde, for environmental protection new product, is the packaging industry's first choice product.

Two, pack 25kg 50kg/pail

Shelf life: 1 year (best storage temperature 10 to 30 degrees)



HF-8511



HF-8599



封口胶(搭口胶)

产品型号	外 观	固含量	粘 度cps	用 途
HF-905	乳白色	50以上	9000 - 11000	用于手工软盒糊盒药盒及手提袋等
HF-909	乳白色	53以上	13000 - 15000	用于机器软盒糊盒药盒及手提袋等

Sealant (with glue)

Product model	appearance	Solid content	cps	use
HF-905	Milk white	above 50	9000 - 11000	For hand box and handbag etc
HF-909	Milk white	above 53	13000 - 15000	used for machine box paste box and handbag etc

1、用途：

用于手提袋、药盒、化妆品盒、酒盒等各种纸制品与塑料粘合（各类过塑包装盒、过塑烟酒盒礼品盒和过塑手挽袋），复合膜（OPP、上光油、PET、PVC复膜及高光印品类纸）与纸制品、上光纸合、软盒等包装物的封边、封口等。

2、使用方法及注意事项：

适用于手涂、机涂封口。粘接时表面不能有灰尘及油渍，涂胶要均匀，要有足够施胶量，凉置约2-10分钟即可粘合贴接，晾置时间不宜过长。

**3、本产品已通过SGS检测报告，不含甲醛，为环保新型产品，是包装行业的首选产品。**

**4、包装：** 25kg/桶。

**5、储存期：**一年（最佳贮藏温度10至30度）

1, use:

Used for handbags, pill boxes, cosmetics boxes, wine boxes and other paper products and plastic glue (all kinds of plastic smoke of packing box, plastic boxes, gift boxes and plastic arm in arm bag).

Composite membrane (OPP, upper gloss oil, PET, PVC film and high gloss printing paper), sealing edge, sealing, etc. Of paper products, glazed paper, soft box etc.

2,Use methods and considerations:

Apply to the sealing of hand and machine. When glued to the surface, the surface should not be covered with dirt and grease, and the glue should be uniform.

It can be glued together for about 2 to 10 minutes. It should not be too long. &nbsp;&nbsp;&nbsp;

3,The product has passed the SGS test report, not contain formaldehyde, for environmental protection new product, is the packaging industry's first choice product.

4,Packing: 25kg/pail. &nbsp;&nbsp;&nbsp;

5,Storage period: 1 year (best storage temperature 10 to 30 degrees)




HF-905手工型

HF - 905 ShouGongXing



HF-909机器手工通用型

HF-909 machine is manual

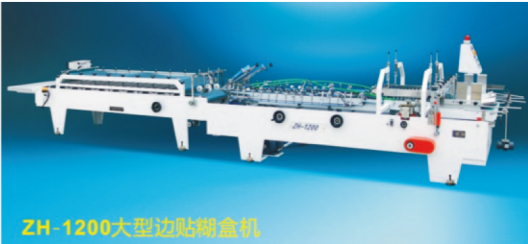

ZH-1200大型边贴糊盒机

## 高档白乳胶

产品型号	外观	固含量	粘度cps	用途
HF-1031	乳白色	53 ± 2.5%	6000-8000	PVC、布料、中纤板、纸复盒及裱衬胶
HF-1031A	乳白色	55 ± 2.5%	12000-14000	牛皮纸装、书背胶、上光油糊盒、PVC贴窗

### High-grade white latex

Product model	appearance	Solid content	cps	use
HF-1031	Milk white	53 ± 2.5%	6000-8000	Milk PVC, cloth, medium fiberboard, paper case and mounted liner
HF-1031A	Milk white	55 ± 5%	12000-14000	Kraft paper, glue, gloss oil paste box, PVC window

**用途:** 1.用于上光油、磨光、牛皮纸、没腹膜的软盒糊盒，及PVC贴窗、PVC与纸张复合，布料与纸张复合，书脊上胶等。  
2.适合于手工刷胶及自动机糊盒用  
3.干燥时间快，干后强度高。

一、本产品通过SGS检测报告，不含甲醛，为环保新型产品，是包装行业的首选产品。

二、包装25kg 50kg/桶

三、保质期：一年（最佳贮藏温度10至30度）


Use: 1. Used for glazing oil, polished, kraft paper, no soft box pasting box of peritoneum, and PVC window, PVC and paper composite, cloth and paper composite, spine glue, etc.  
Suitable for hand brush and self-motivation paste box  
The drying time is fast, the dry hind strength is good.  
One, this product through SGS detection report, not contain formaldehyde, for environmental protection new product, is the packaging industry's first choice product.  
Two, pack 25kg 50kg/pail  
Shelf life: 1 year (best storage temperature 10 to 30 degrees)



HF-1031



HF-1031A

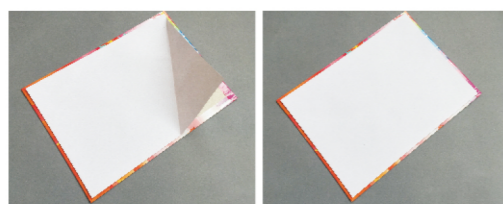

China:

GUANGZHOU PRINT AREA TECHNOLOGY CO.,LTD

Add: Room 128, Building G, NO.55 Huadi South Avenue, Liwan District, Guangzhou, China

Tel: +86 20 81408128 Skype: yy.ink Email: yyink@yyink.com Web: www.enyyink.com

FOSHAN YINYA TECHNOLOGY CO., LTD

Add: H01, Building H, Guangping International Trade And Industrial Center, Nanhai District, Foshan

Tel: +86-757-86716019 Skype: yy.ink Email: AVA@yyink.com Web: www.enyyink.com

Myanmar: PRINT AREA TECHNOLOGY COMPANY LIMITED

Add: NO.297(upper Block), 40 Street, kyauktada, Township, yangon, Myanmar

Tel: 09 261480719 09 261480718 Email: ink@yyink.com f:PrintArea

Web:www.enyyink.com Viber:09 261 480 718

