


Blood Bank Refrigerator

Advantage

- 1. Multiple sensors design: make sure the precise monitoring and programming.
- 2. Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material).
- 3. Forced air refrigeration system, ensure inner temperature constant and uniform.
- 4. Adjustable shelves, improve space utilization; blood storage baskets can be classified.
- 5. Individual transparent inner door, effectively reduce cool air loss when opening the door.

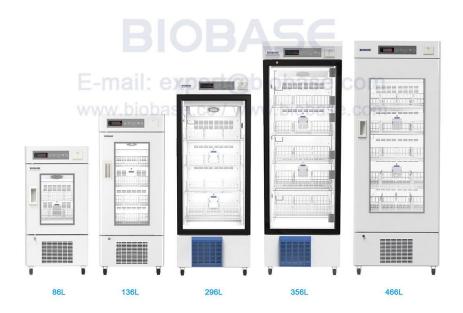

Technical Parameters

Model	BBR-4V86	BBR-4V136	BBR-4V296	BBR-4V356	BBR-4V466
Capacity	86L	136L	296L	356L	466L
Temp. Range	4±2°C				
Temp. Accuracy	0.1°C				
Control System	Microprocessor control				
Display	LED display				
Alarm	Audio and visual alarm for:				
Aldilli	High or low temperature, Sensor & system failure; Door ajar, Power failure				
Refrigeration Type	Forced air refrigeration system				
Refrigerant	R134a, CFC-Free				
Compressor	International famous compressor				
Condenser & Evaporator	High efficiency air-cooled condenser; Made of copper				
Defrost	Frostless design				
Construction	Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material)				
Internal Material Material	Stainless steel				
External Material Sprayed steel plate					
	Electric heated glass				
Door	semi-foamed door with lock,		Acrylic inner door;		semi-foamed door with lock,
	Acrylic inner door Out		Outer door with locking buckle		Acrylic inner door
Consumption	245W/264VA	252W/264VA	267W/528VA	352W/528VA	380W/594VA
Power Supply	AC220V±10%, 50Hz (Standard); AC110/220V,60Hz (Optional) AC220V±10%, 50Hz (Standard)				
Casters	Two universal casters with brakes, two directional casters				
Adjustable Shelves	2pcs	4pcs	4pcs	5pcs	5pcs
Baskets	6pcs	12pcs	12pcs	15pcs	20pcs
Blood Bags (450ml)	66pcs (450ml)	132pcs (450ml)	156pcs (450ml)	195pcs (450ml)	300pcs (450ml)
Standard Accessory	Thermal printer, LED lamp, The temperature test box, probe access port, door key				
Optional Accessory	Temperature recorder, USB port, RS485, Increase shelves number				
External Size(W*D*H) mm	530*660*1037	530*660*1287	630*720*1658	630*720*1886	680*747*1886
Package Size(W*D*H)mm	680*740*1330	685*750*1560	780*840*1910	770*830*2070	820*910*2080
	103kg	120kg	160kg	175kg	199kg

02 03