


Automatic Medical Sealer

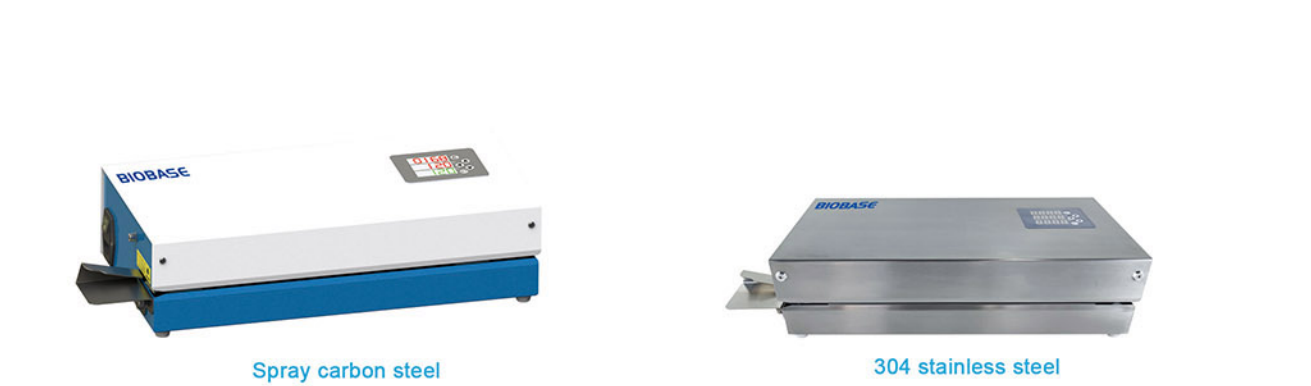

Features:

- * Auto-control function, continuous operation; substitution of manual sealing machine;
- * Microcomputer Temperature controller, accuracy ±1%, working temperature range 60~220℃;
- * Fast heating, 40 seconds required from room temperature to 180℃;
- * Adjustable fixed-force system, suitable for sealing paper-plastic bags, 3D paper-plastic bags and paper-paper bags;
- * Advanced flat ceramic heating components, high-temperature stability, long life expectancy and high heat efficiency.


Technical Parameters:

Model	MS100-L
Seal Speed	10m/min
Seal Width	12mm
Seal Margin	0~35mm adjustable
Display	LED screen
Machine Shell Material	Spray carbon steel(standard) or 304 stainless steel(optional)
Consumption	500W
Power Supply	AC110/220V±10%, 50/60Hz
External Size (W*D*H)	490*240*120mm
Packing Size (W*D*H)	600*380*260mm
Net/Gross Weight	11/12kg

Printing Medical Sealer

Features:

- * Temperature controlled by a microcomputer, accuracy ±1%, working temperature range is 60~220℃;
- * Automatic fault detection and alarm;
- * Fast heating, 40 seconds required from room temperature to 180℃;
- * Automatic temperature reduction operated by a fan connected to temperature control system, reducing the waiting time;
- * Adjustable fixed-force system, suitable for sealing 3D paper-plastic bags and paper-plastic bags of any sickness;
- * Advanced flat ceramic heating components, high-temperature stability, long life expectancy and high heat efficiency.

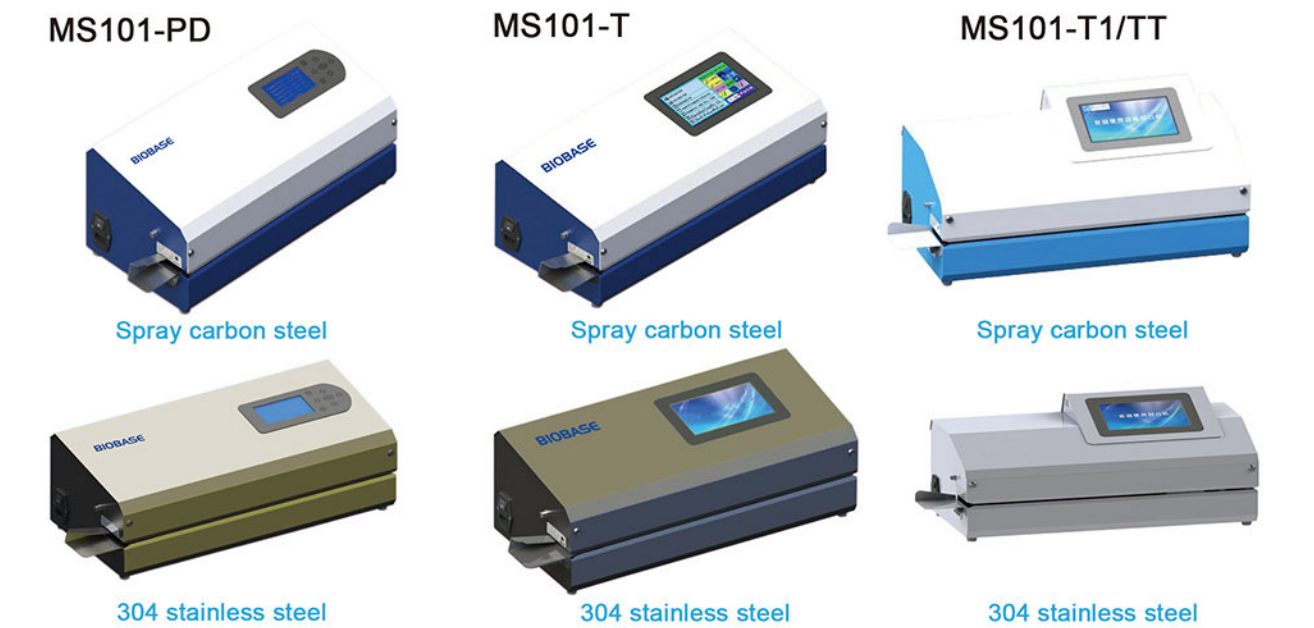

Printing System Features:

- * Print function can be disabled or partially activated;
- * Sterilizing and expire date auto adjust; Automatic faults alarm display during working;
- * Adjustable character font and style, easy to print more information on narrower bags;
- * The system provides the required minimum width of the bag based on the content of print, easier for users to define the print content or select appropriate bag; Auto alarm when width is insufficient;
- * With sealing detection mode;

Technical Parameters:

Model	MS101-PD	MS101-T	MS101-TT
Seal Speed	10m/min		
Seal Width	12mm		
Seal Margin	0~35mm adjustable		
Display	4.3" color LCD screen	7 "color LCD touch screen	
Machine Shell Material	Spray carbon steel(standard) or 304 stainless steel(optional)		
Other Functions	/	/	Double line printing
Consumption	500W		
Power Supply	AC110/220V±10%, 50/60Hz		
External Size (W*D*H)	560*260*220mm		
Packing Size (W*D*H)	670*360*340mm		720*360*340mm
Gross Weight	19kg		22kg